

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?


BAM registration: 20050501-LE33/10L/L33E00SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33 Form: 1/16, Serie: 1/1, Page: 1 Page count: 1

(olv3* = 0.0, l3*, v3*)

(olv3* = 0.0, 0, 1)

(olv3* = 0.0, 1, 0)

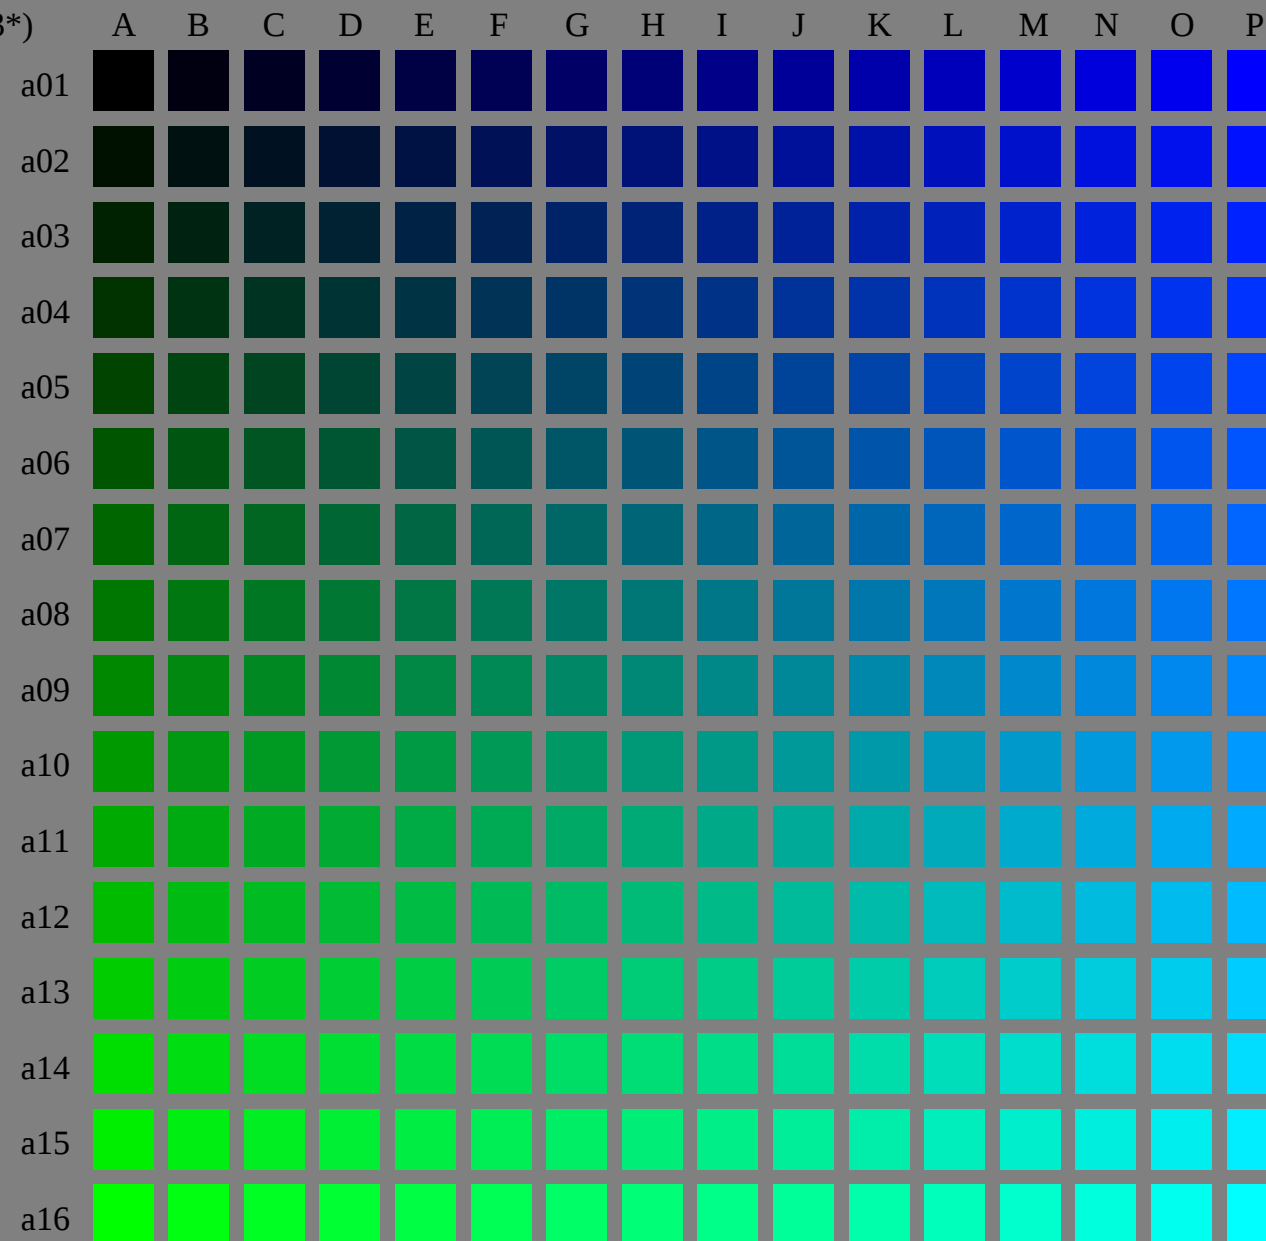

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.0 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend


See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?

BAM registration: 20050501-LE33/10L/L33E01SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 2/16, Serie: 1/1, Page: 2 Page count: 2

($olv3^* = 0.066, l3^*, v3^*$)

($olv3^* = 0.066, 0, 1$)

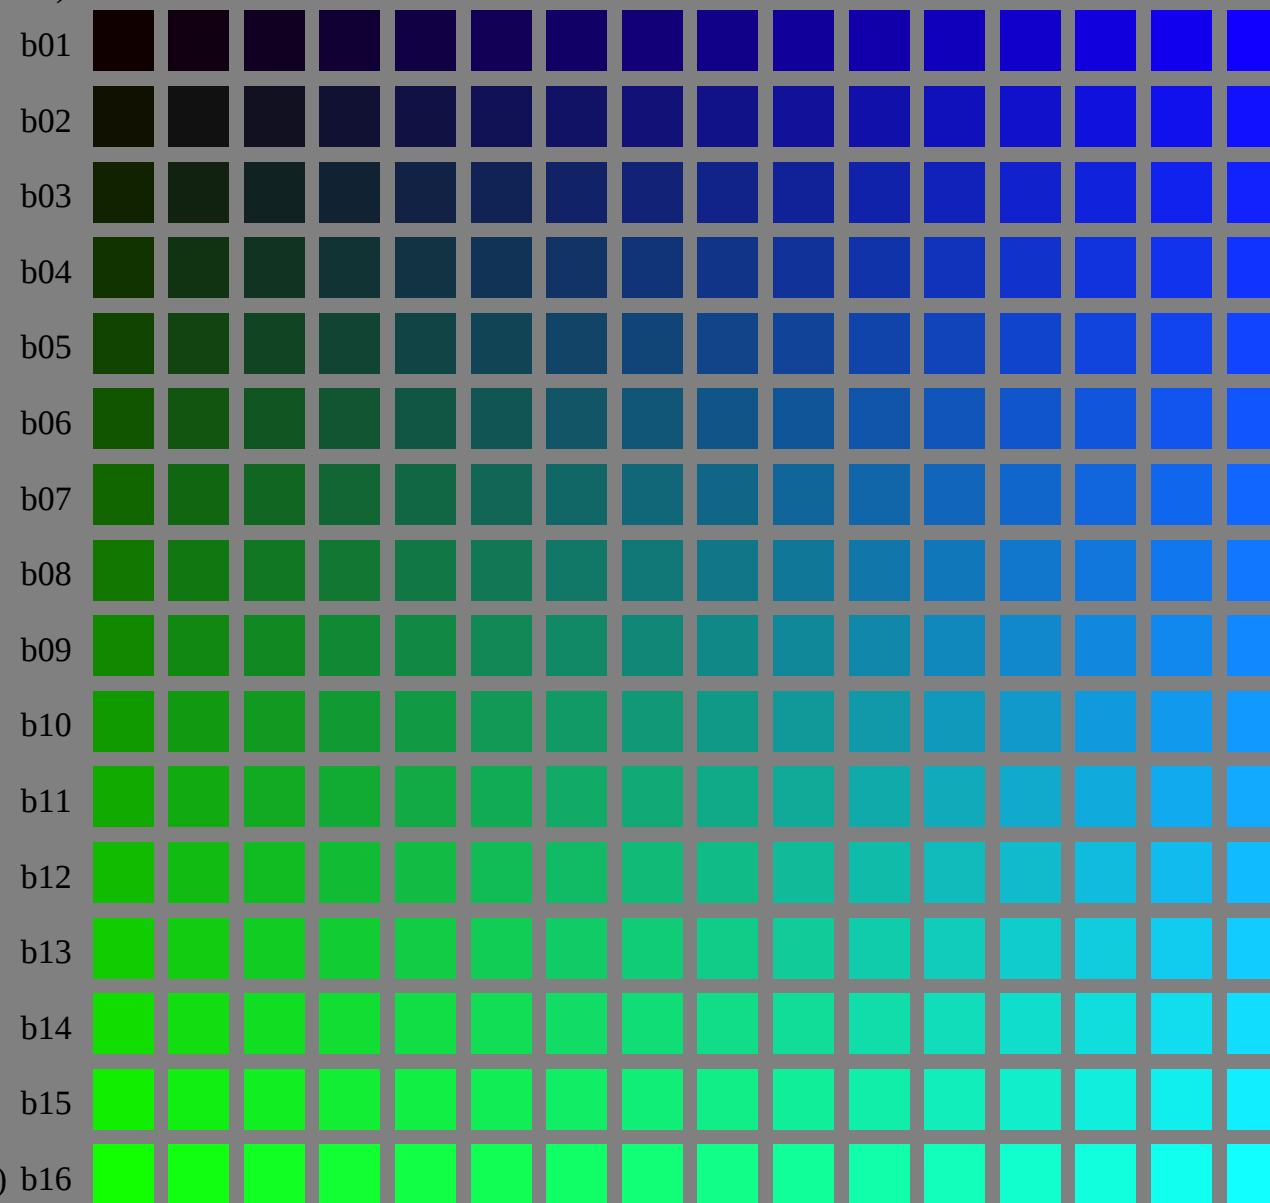

($olv3^* = 0.066, 1, 0$)

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates $olv3^*$ of ISO/IEC 15775:1999 as input; $r3^* = o3^* = 0.066 = \text{const.}$

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: $olv3^*$ setrgbcolor
output: Startup (S) data dependend

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?


BAM registration: 20050501-LE33/10L/L33E02SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 3/16, Serie: 1/1, Page: 3 Page count: 3

(olv3* = 0.133, l3*, v3*)

(olv3* = 0.133, 0, 1)

(olv3* = 0.133, 1, 0)

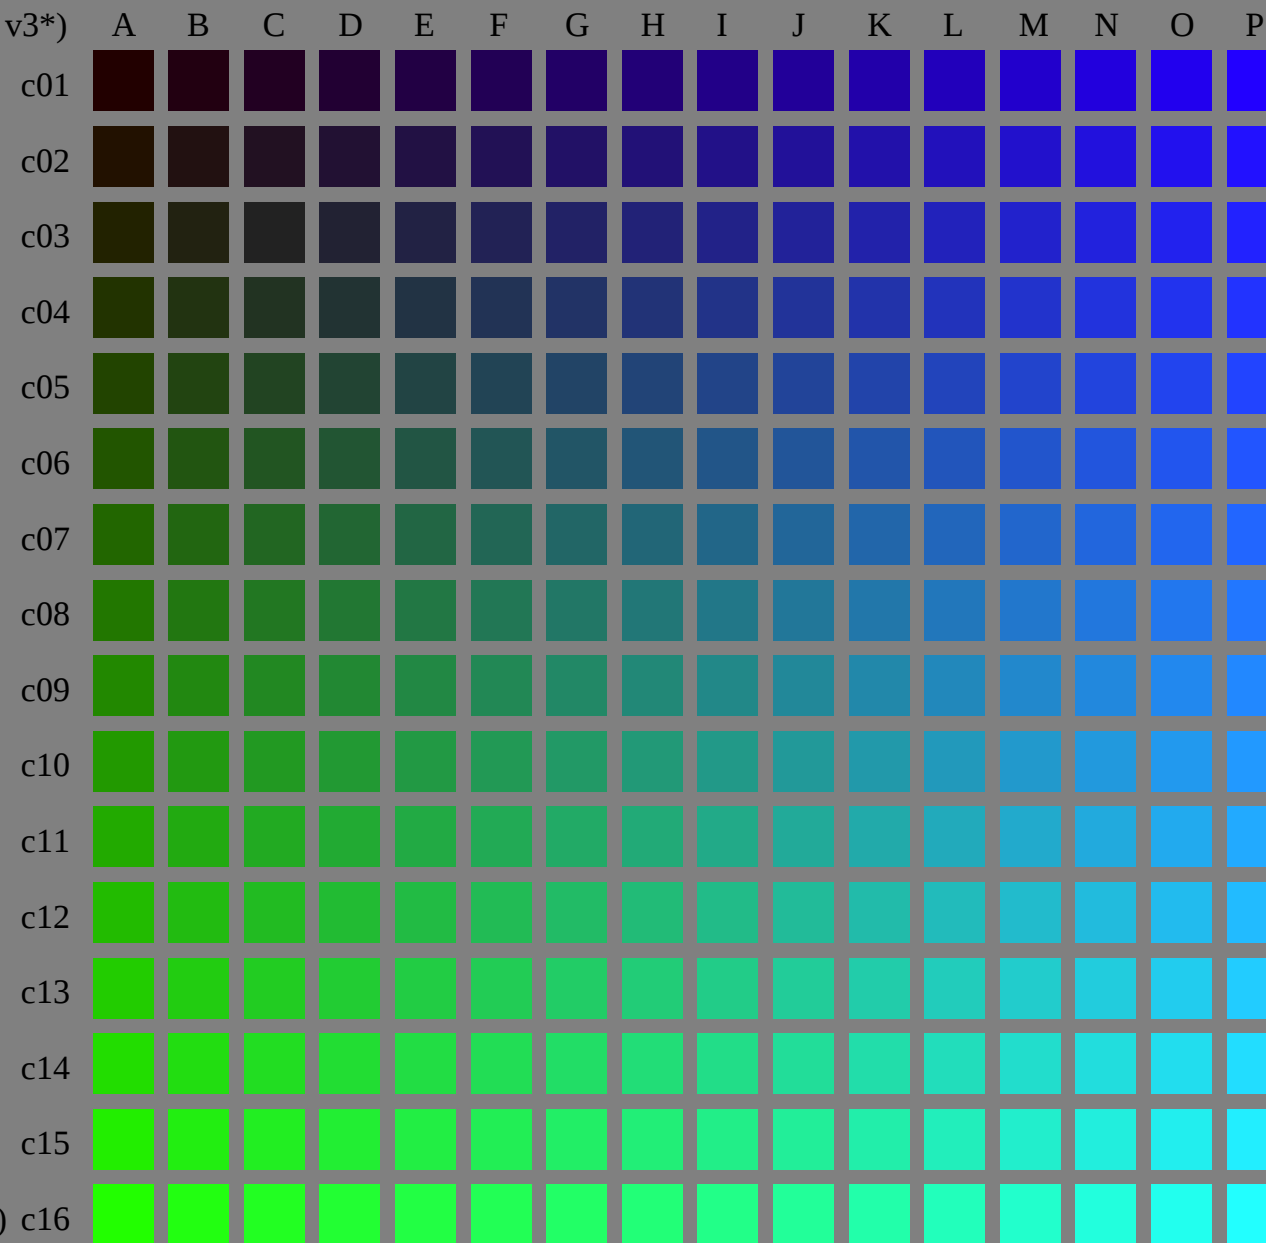

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.133 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?


BAM registration: 20050501-LE33/10L/L33E03SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 4/16, Serie: 1/1, Page: 4 Page count: 4

(olv3* = 0.2, l3*, v3*)

(olv3* = 0.2, 0, 1)

(olv3* = 0.2, 1, 0)

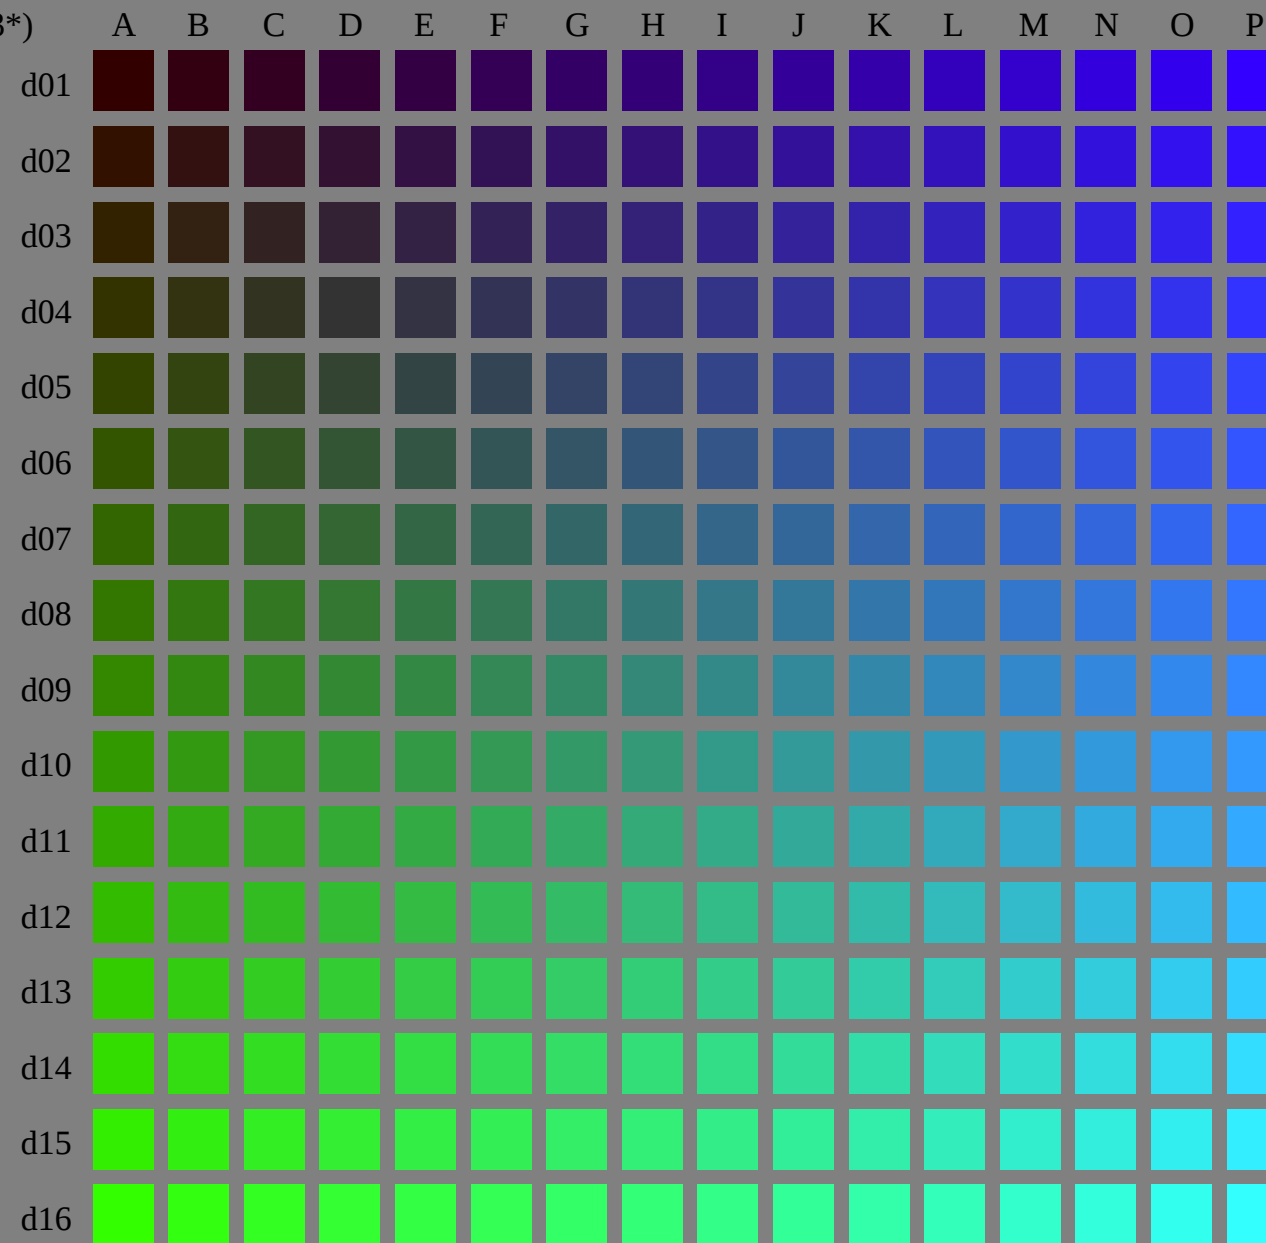

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.2 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?

BAM registration: 20050501-LE33/10L/L33E04SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 5/16, Serie: 1/1, Page: 5 Page count: 5

(olv3* = 0.266, l3*, v3*)

(olv3* = 0.266, 0, 1)

(olv3* = 0.266, 1, 0)

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.266 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?

BAM registration: 20050501-LE33/10L/L33E05SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 6/16, Serie: 1/1, Page: 6 Page count: 6

(olv3* = 0.333, l3*, v3*)

(olv3* = 0.333, 0, 1)

(olv3* = 0.333, 1, 0)

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.333 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?


BAM registration: 20050501-LE33/10L/L33E06SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 7/16, Serie: 1/1, Page: 7 Page count: 7

(olv3* = 0.4, l3*, v3*)

(olv3* = 0.4, 0, 1)

(olv3* = 0.4, 1, 0)

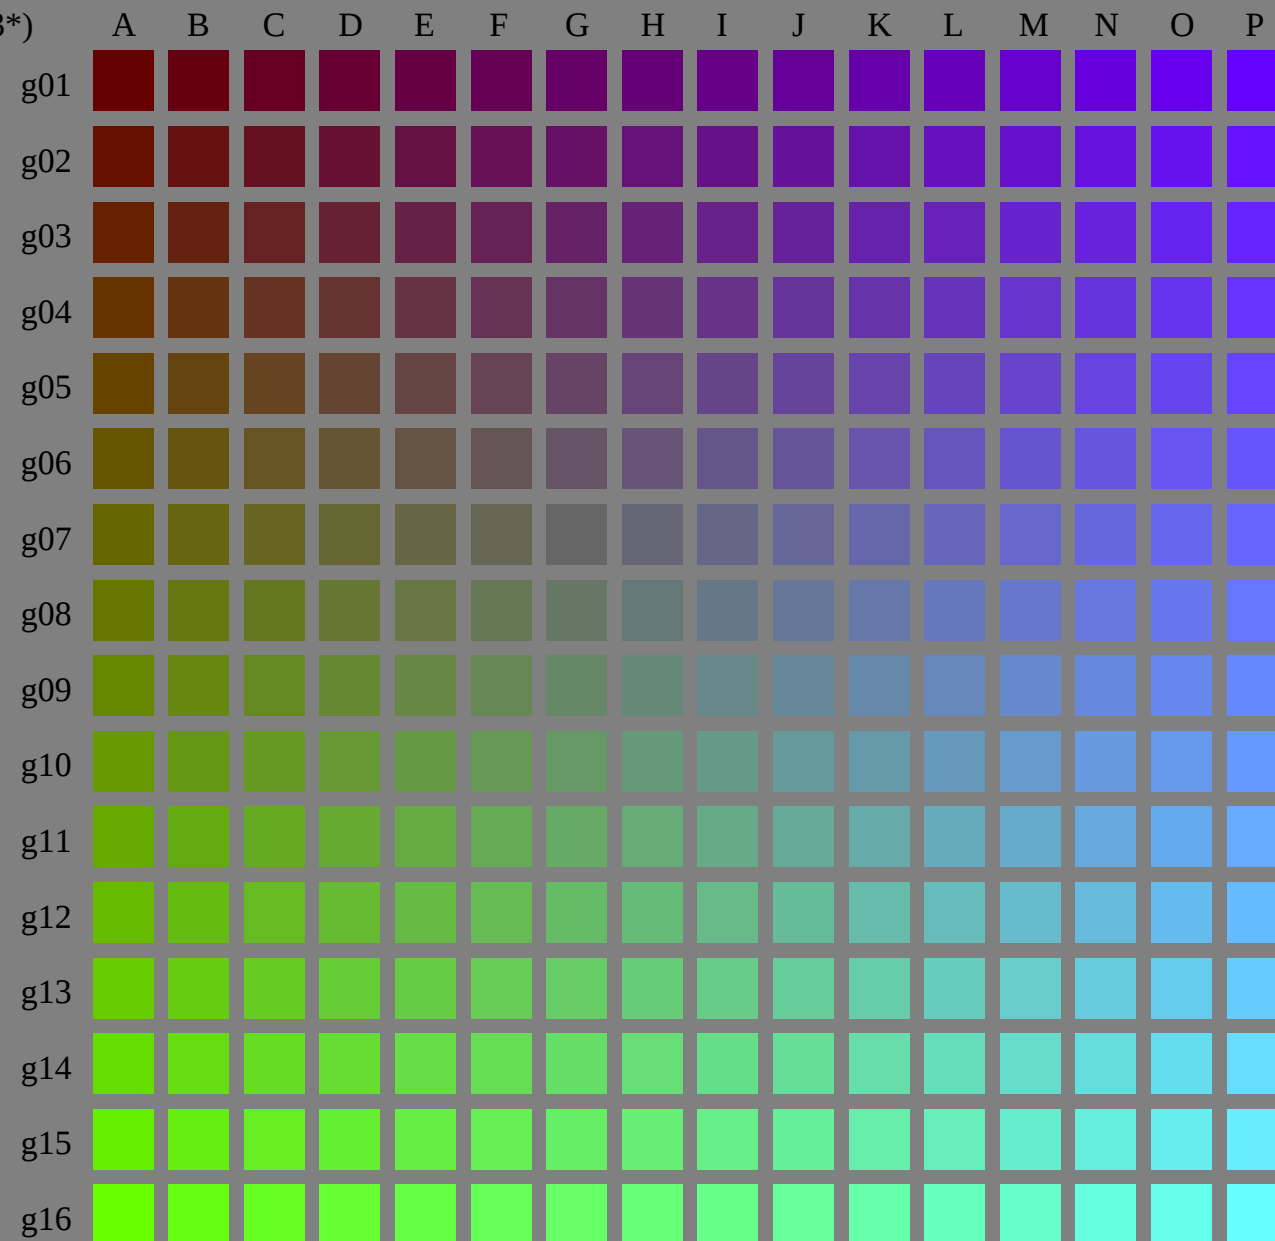

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.4 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?


BAM registration: 20050501-LE33/10L/L33E07SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 8/16, Serie: 1/1, Page: 8 Page count: 8

(olv3* = 0.466, l3*, v3*)

(olv3* = 0.466, 0, 1)

(olv3* = 0.466, 1, 0)

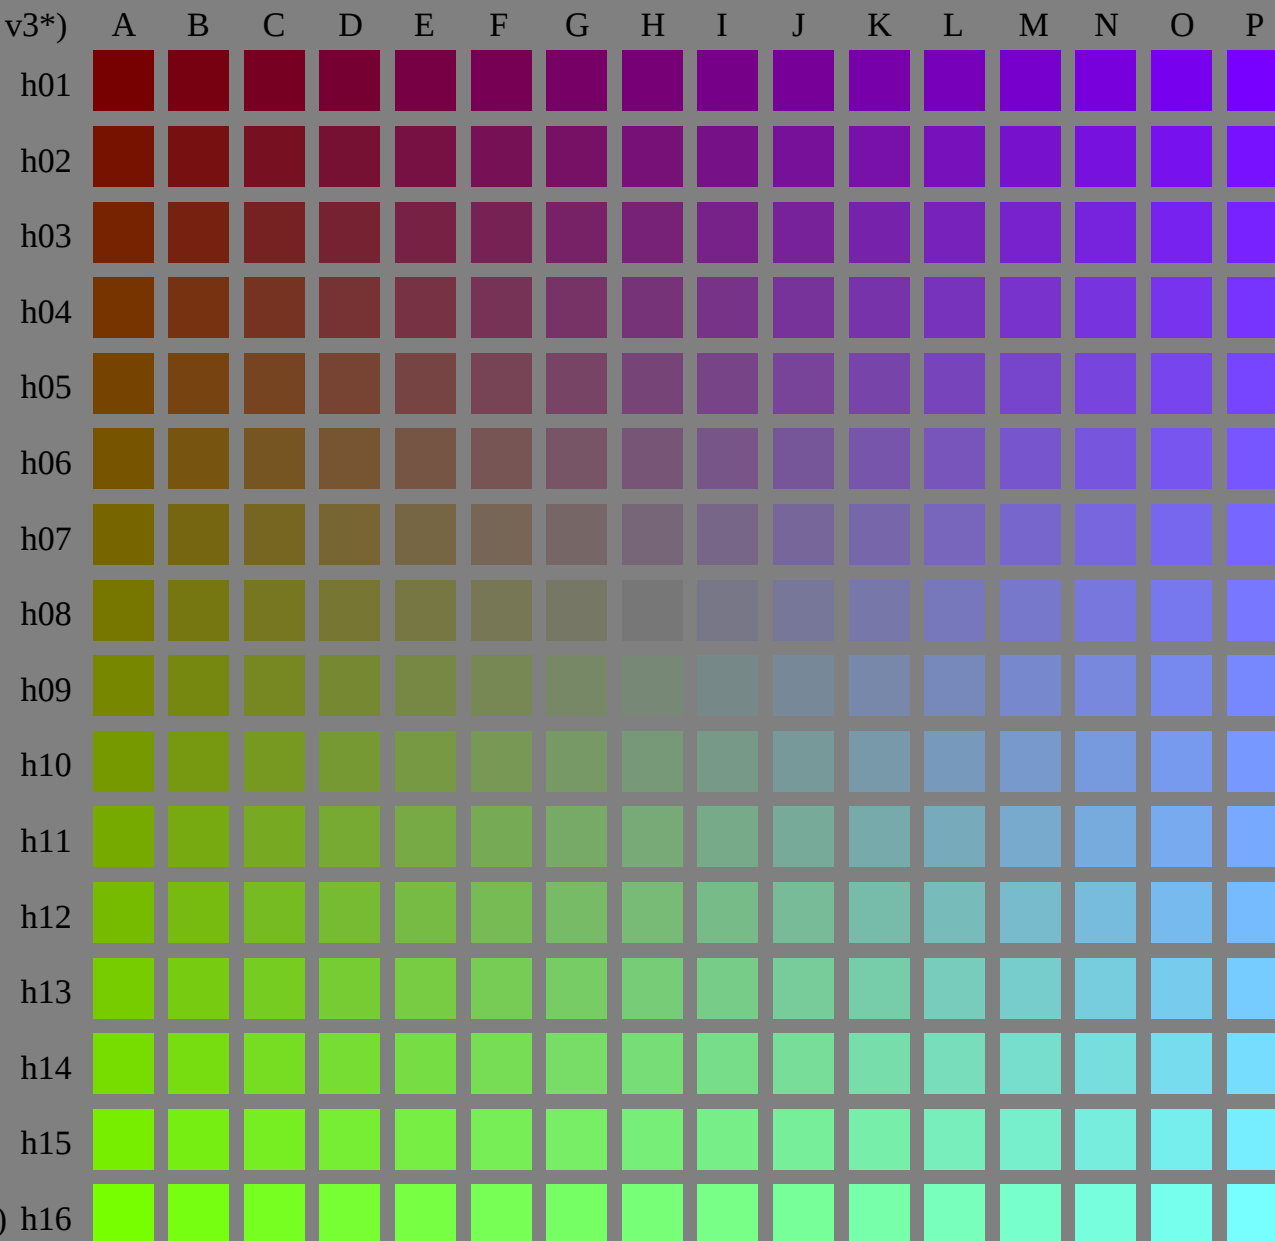

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.466 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?

BAM registration: 20050501-LE33/10L/L33E08SP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 9/16, Serie: 1/1, Page: 9 Page count: 9

(olv3* = 0.533, l3*, v3*)

(olv3* = 0.533, 0, 1)

(olv3* = 0.533, 1, 0)

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.533 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?

BAM registration: 20050501-LE33/10L/L33E09SP.PS/.PDF
application for measurement of printer systems


BAM material: code=rh4ta

/LE33/ Form: 10/16;Series: 1/1, Page: 10 Page count: 10

(olv3* = 0.6, l3*, v3*)

(olv3* = 0.6, 0, 1)

(olv3* = 0.6, 1, 0)

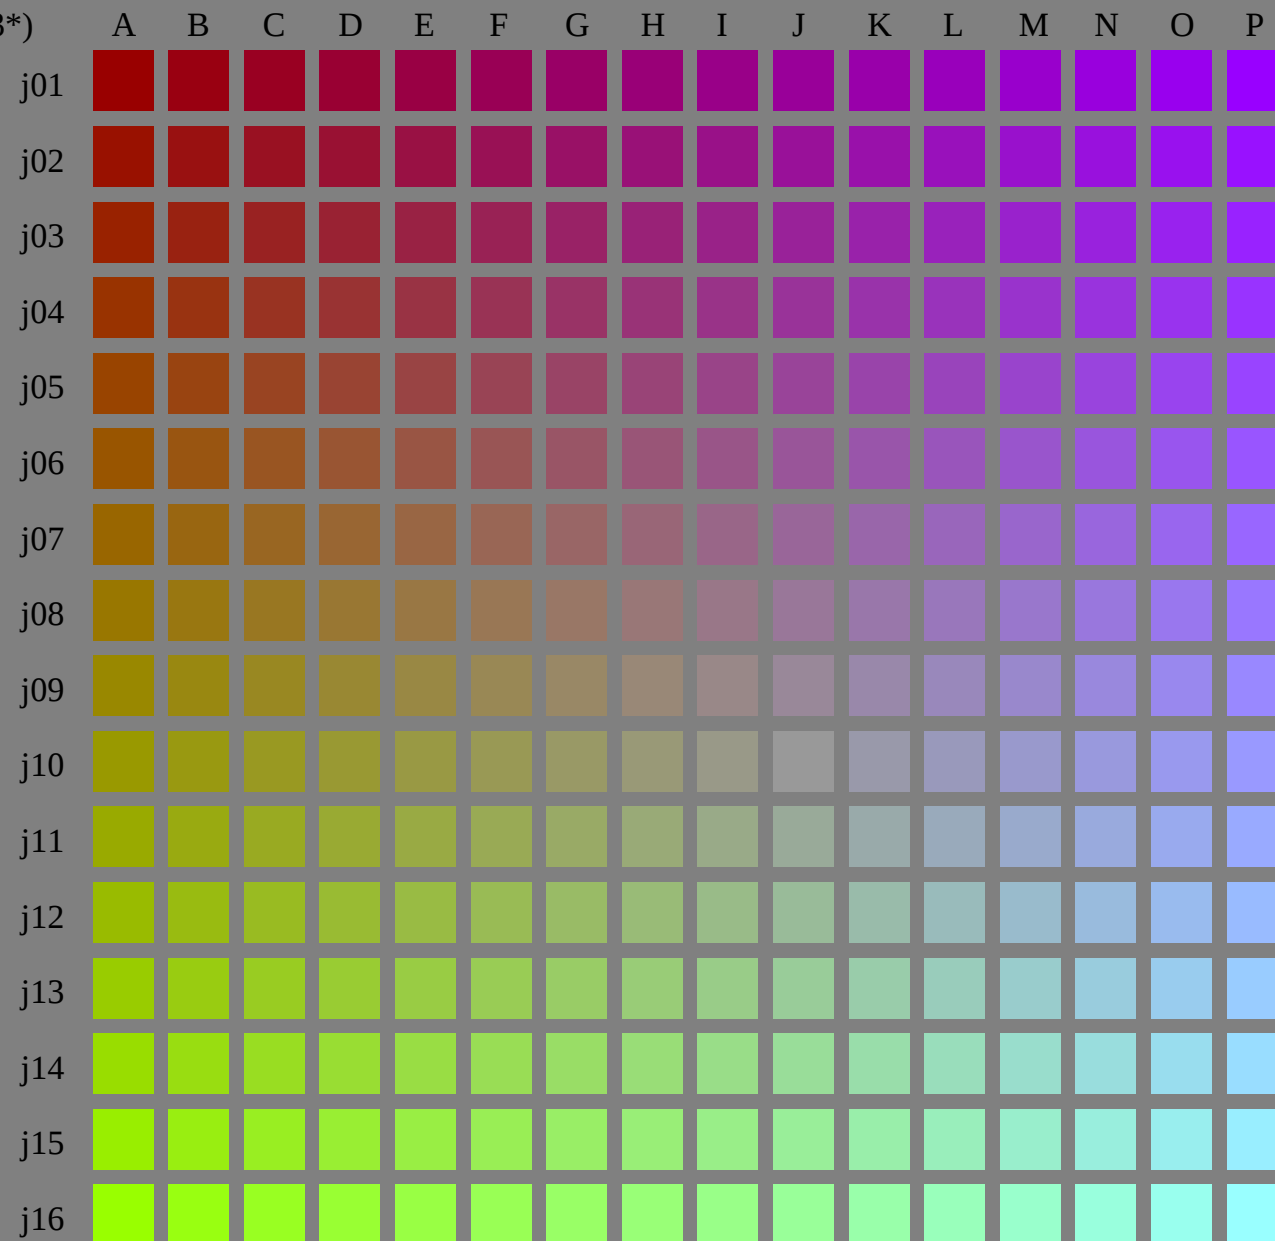

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.6 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

(olv3* = 0.666, l3*, v3*)

k01

k02

k03

k04

k05

k06

k07

k08

k09

k10

k11

k12

k13

k14

k15

k16

(olv3* = 0.666, 1, 0)

(olv3* = 0.666, 0, 1)

See for similar files: <http://www.ps.bam.de/LE33/>
Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1?

BAM registration: 20050501-LE33/10L/L33E0BSP.PS/.PDF
application for measurement of printer systems

BAM material: code=rh4ta
/LE33/ Form: 12/16;Series: 1/1, Page: 12 Page count: 12

(olv3* = 0.733, l3*, v3*)

(olv3* = 0.733, 0, 1)

(olv3* = 0.733, 1, 0)

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.733 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00
4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor
output: Startup (S) data dependend

(olv3* = 0.8, l3*, v3*)

m01

m02

m03

m04

m05

m06

m07

m08

m09

m10

m11

m12

m13

m14

m15

m16

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

(olv3* = 0.8, 0, 1)

(olv3* = 0.8, 1, 0)

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.8 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00

4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor

output: Startup (S) data dependend

(olv3* = 0.866, l3*, v3*)

A B C D E F G H I J K L M N O P

n01

n02

n03

n04

n05

n06

n07

n08

n09

n10

n11

n12

n13

n14

n15

n16

(olv3* = 0.866, 0, 1)

(olv3* = 0.866, 1, 0)

LE330-7, Test chart file with 16x16x16 (=4096) colours; Device dependent colour coordinates olv3* of ISO/IEC 15775:1999 as input; r3* = o3* = 0.866 = const.

BAM-test chart no. LE33; Systems ORS18 and TLS00


4096 (=16x16x16) colours of ISO/IEC 15775:1999

input: olv3* setrgbcolor

output: Startup (S) data dependend

(olv3* = 0.933, l3*, v3*)

A B C D E F G H I J K L M N O P

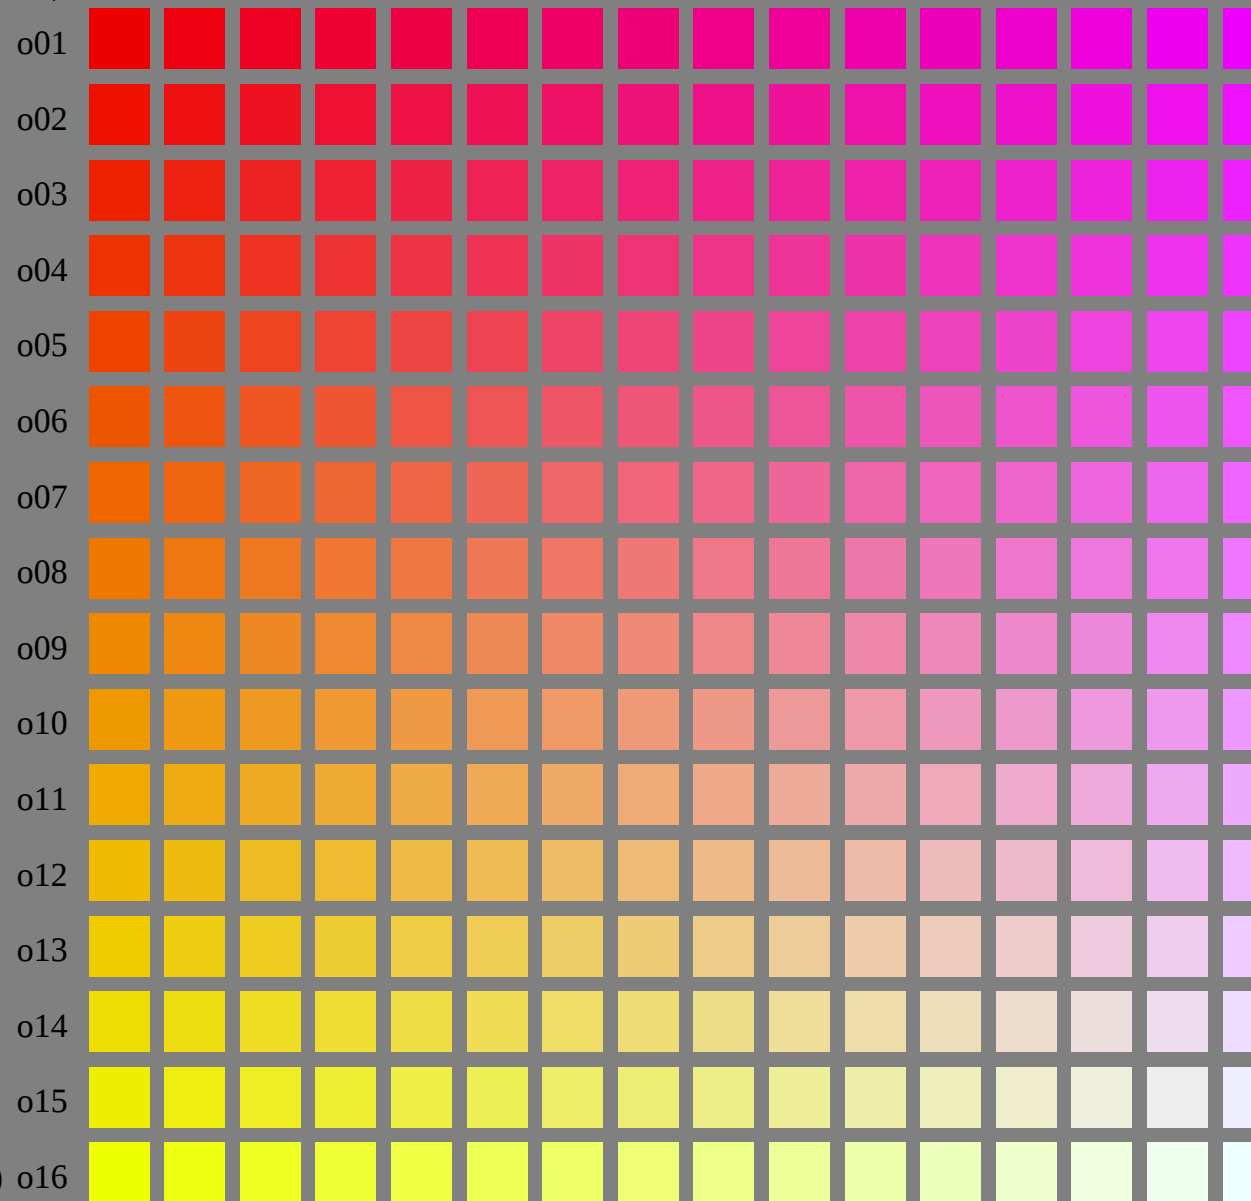

(olv3* = 0.933, 0, 1)

(olv3* = 1.0, l3*, v3*)

p01

p02

p03

p04

p05

p06

p07

p08

p09

p10

p11

p12

p13

p14

p15

p16

(olv3* = 1.0, 1, 0)

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

(olv3* = 1.0, 0, 1)