




Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N




Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

ME150-3, Element A: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: w* setgray

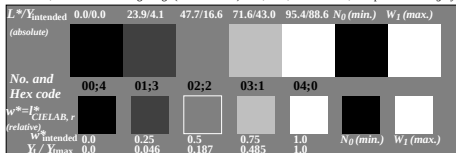


ME150-5, Element B: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: w* setgray

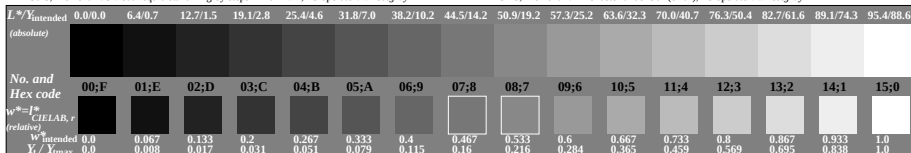


ME150-7, Element C: 16 visual equidistant L^* -grey steps; PS operator: w* setgray




Test chart ME15 according to ISO 9241-306; test chart 3 according to ISO/IEC 15775
Page 1/2; recognition of 16 grey steps; Contrast range $Y_w:Y_n = 88.6 : 0.0$

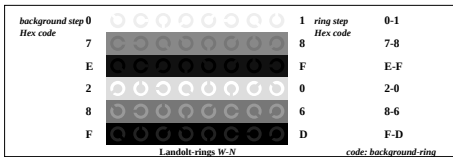

ME151-1, Element D: Landolt-rings W-N; PS operator: w* setgray

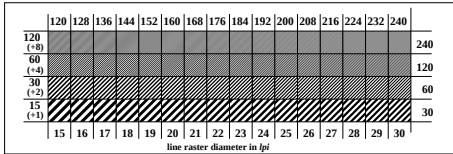

ME151-3, Element E: Line raster under 45° (or 135°); PS operator: w* setgray

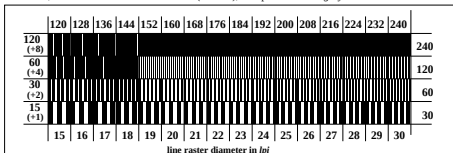

ME151-5, Element F: Line raster under 90° (or 0°); PS operator: w* setgray

