


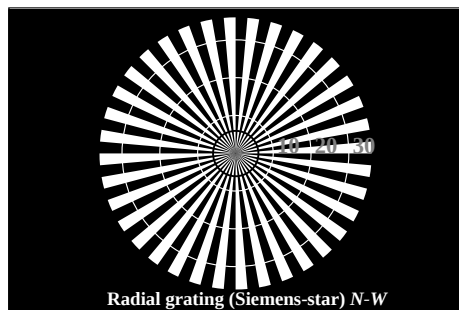





Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

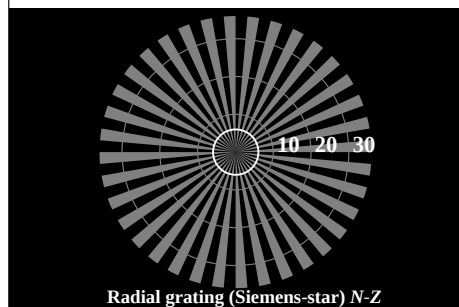


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

ME160-3, Element A: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: w\* setgray

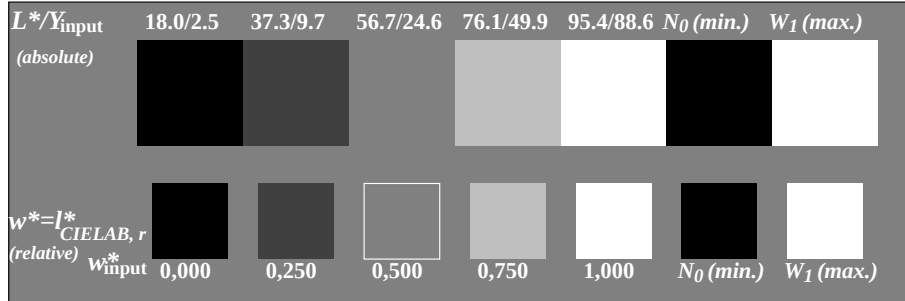


ME160-5, Element B: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: w\* setgray

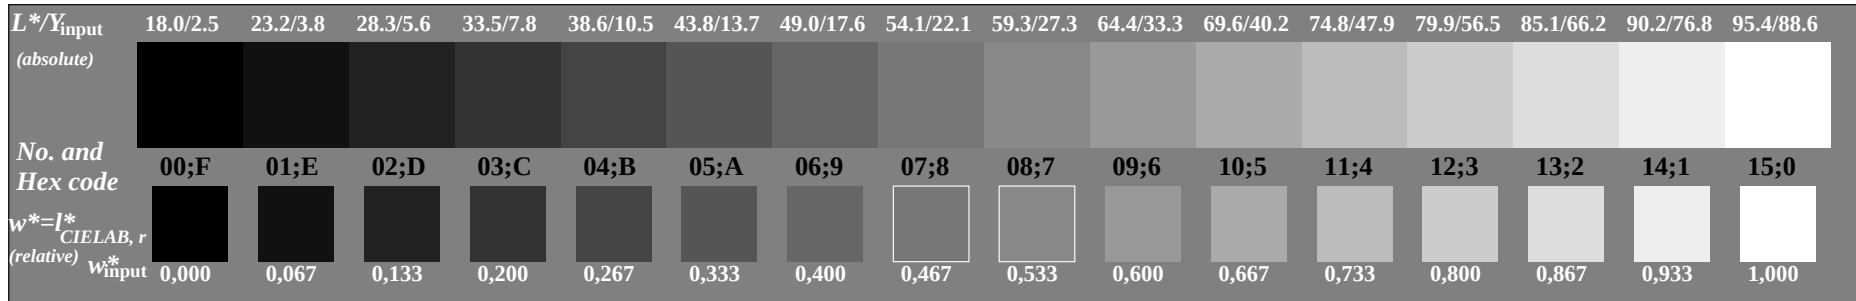


ME160-7, Element C: 16 visual equidistant  $L^*$ -grey steps; PS operator: w\* setgray




Test chart ME16 according to ISO 9241-306; test chart 3 according to ISO/IEC 15775 input: w\* setgray  
Page 1/1; recognition of 16 grey steps; standard contrast range 88.6 : 2.5 output: w\* setgray

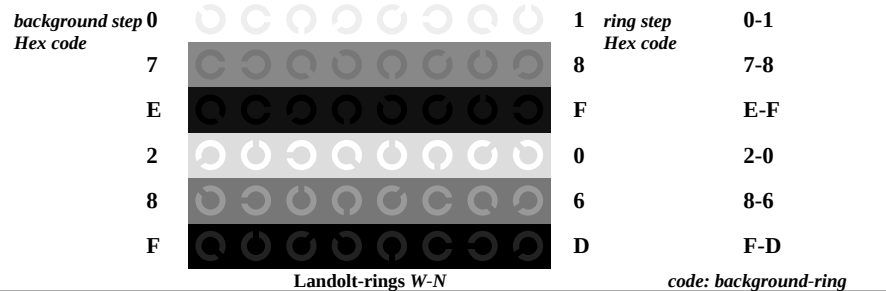

DM110-1, Element D: Landolt-rings W-N; PS operator: w\* setgray

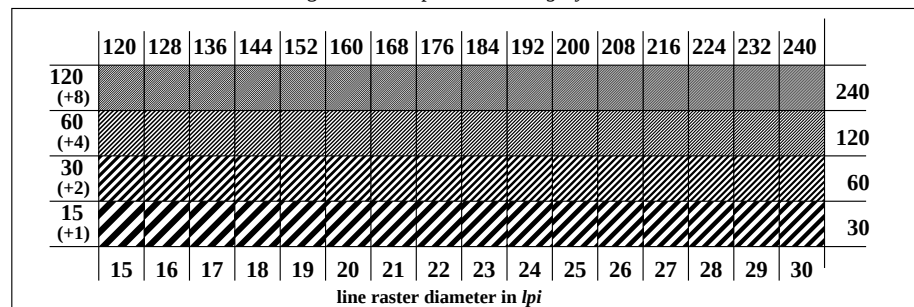

ME161-3, Element E: Line raster under 45° (or 135°); PS operator: w\* setgray

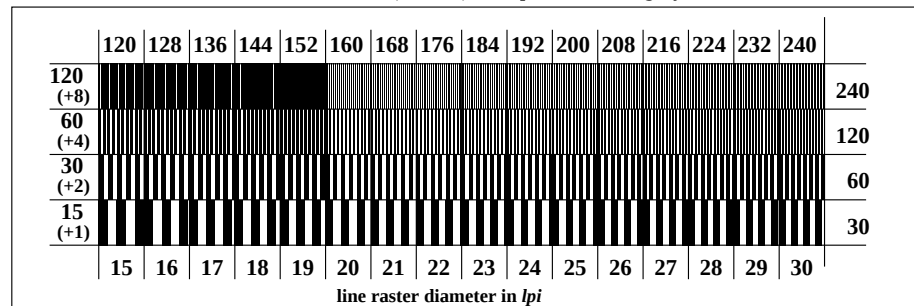

ME161-5, Element F: Line raster under 90° (or 0°); PS operator: w\* setgray

