


See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>


Version 2.1, io=1,1

BAM registration: 20050501-ME17/10L/L17E00FA.PS/.TXT
application for displays (Yr=2.5) and printers


BAM material: code=rh4ta

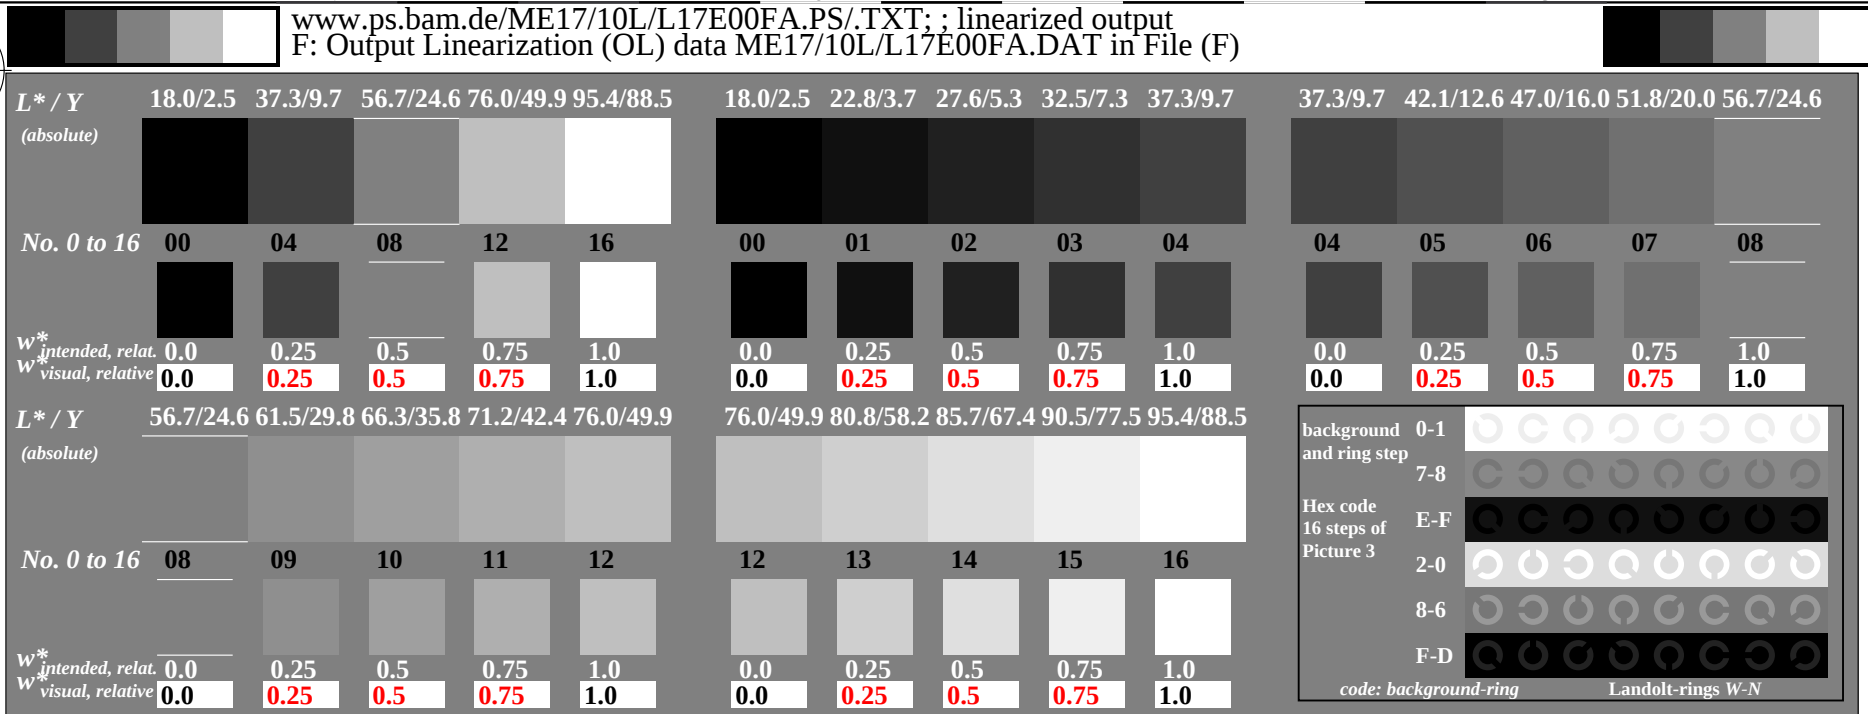

ME170-3N, Element A: 5 times 5 visual equidistant L*-grey steps and Landolt-rings; Use of the PS operator w* setgray

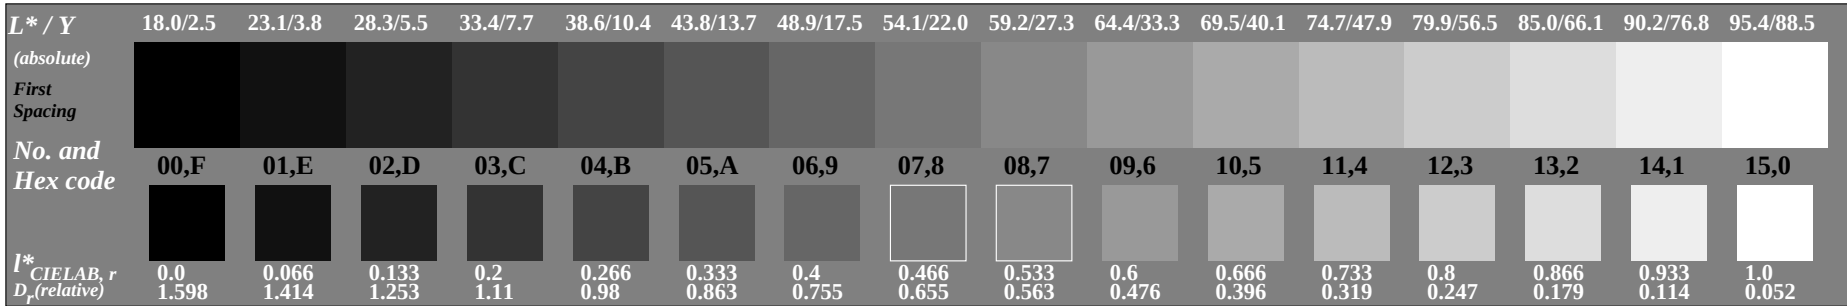

ME170-5N, Element B: 16 visual equidistant ΔL*-grey steps; dark grey steps; Use of the PS operator w* setgray

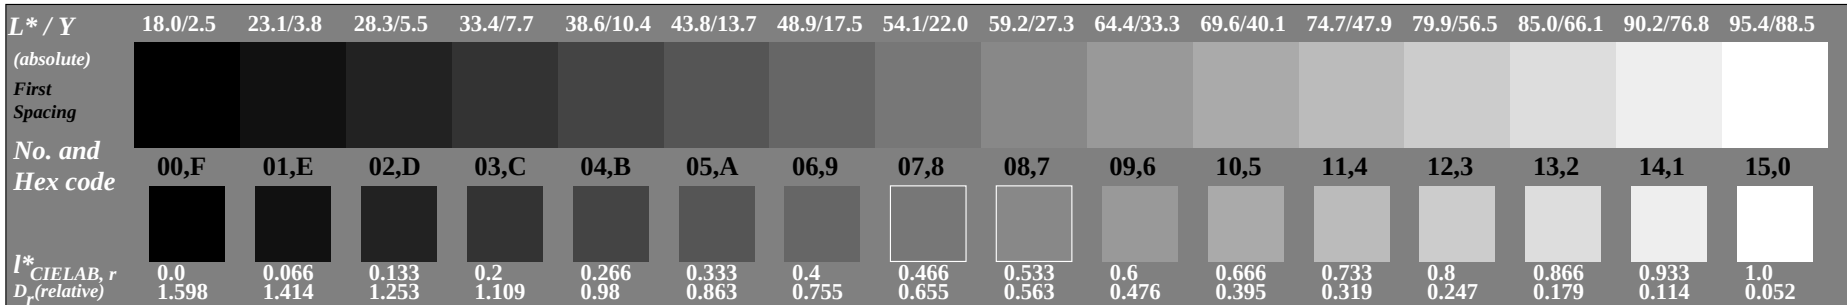


ME170-7N, Element C: 16 visual equidistant ΔL*-grey steps; dark grey steps; Use of the PS operator w* setgray

See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE^*	Start output S1
1	18.0	0.0	0.0	0.0	0.0	Specification according to
2	23.16	0.0	0.07	0.0	0.0	ISO/IEC 15775:1999 Annex G
3	28.32	0.0	0.13	0.0	0.0	and DIN 33866-1:2000 Annex G
4	33.48	0.0	0.2	0.0	0.0	
5	38.64	0.0	0.27	0.0	0.0	
6	43.8	0.0	0.33	0.0	0.0	
7	48.96	0.0	0.4	0.0	0.0	
8	54.12	0.0	0.47	0.0	0.0	
9	59.28	0.0	0.53	0.0	0.0	
10	64.44	0.0	0.6	0.0	0.0	
11	69.6	0.0	0.67	0.0	0.0	
12	74.76	0.0	0.73	0.0	0.0	
13	79.92	0.0	0.8	0.0	0.0	
14	85.08	0.0	0.87	0.0	0.0	
15	90.24	0.0	0.93	0.0	0.0	Mean lightness difference (16 steps)
16	95.4	0.0	1.0	0.0	0.0	$\Delta E^*_{\text{CIELAB}} = 0.0$
17	18.0	0.0	0.0	0.0	0.0	
18	37.35	0.0	0.25	0.0	0.0	
19	56.7	0.0	0.5	0.0	0.0	
20	76.05	0.0	0.75	0.0	0.0	Mean lightness difference (5 steps)
21	95.4	0.0	1.0	0.0	0.0	$\Delta L^*_{\text{CIELAB}} = 0.0$
Mean colour reproduction index:					$R^*_{\text{ab,m}} = 100$	

ME171-1N, Meas.: ME17/10L/L17E00NA.PS;S1; Device: (Y); ; Date: M050401

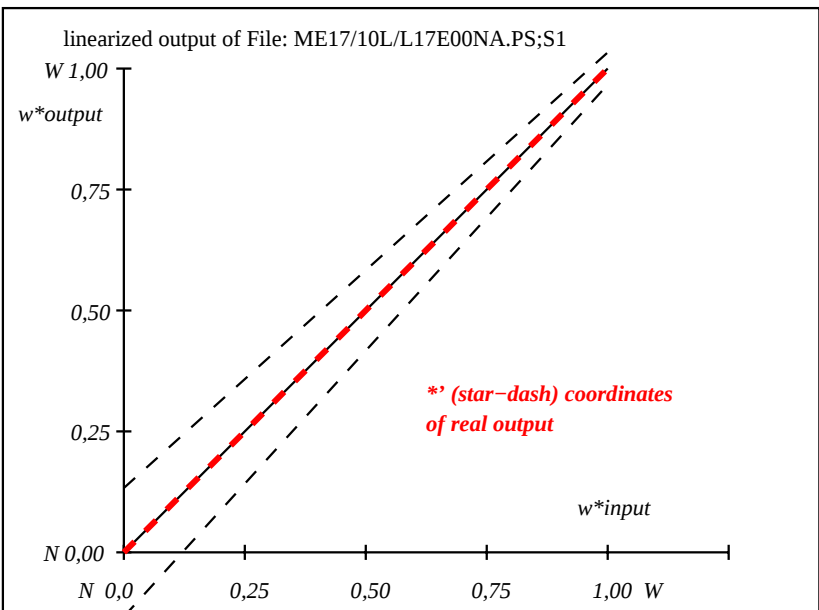


ME171-5N, File: ME17/10L/L17E00NA.PS;S1; Device: (Y); ; Date: M050401

Colorimetric specification of Page 1/4 according to ISO/IEC 15775:1999 Annex G
Page 2/4, 5 step grey scaling for visual linearisation of 16 grey steps

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE^*	Intended output S2
1	18.0	0.0	0.0	0.0	0.0	Specification according to
2	23.16	0.0	0.07	0.0	0.0	ISO/IEC 15775:1999 Annex G
3	28.32	0.0	0.13	0.0	0.0	and DIN 33866-1:2000 Annex G
4	33.48	0.0	0.2	0.0	0.0	
5	38.64	0.0	0.27	0.0	0.0	
6	43.8	0.0	0.33	0.0	0.0	
7	48.96	0.0	0.4	0.0	0.0	
8	54.12	0.0	0.47	0.0	0.0	
9	59.28	0.0	0.53	0.0	0.0	
10	64.44	0.0	0.6	0.0	0.0	
11	69.6	0.0	0.67	0.0	0.0	
12	74.76	0.0	0.73	0.0	0.0	
13	79.92	0.0	0.8	0.0	0.0	
14	85.08	0.0	0.87	0.0	0.0	
15	90.24	0.0	0.93	0.0	0.0	Mean lightness difference (16 steps)
16	95.4	0.0	1.0	0.0	0.0	$\Delta E^*_{\text{CIELAB}} = 0.0$
17	18.0	0.0	0.0	0.0	0.0	
18	37.35	0.0	0.25	0.0	0.0	
19	56.7	0.0	0.5	0.0	0.0	
20	76.05	0.0	0.75	0.0	0.0	Mean lightness difference (5 steps)
21	95.4	0.0	1.0	0.0	0.0	$\Delta L^*_{\text{CIELAB}} = 0.0$
Mean colour reproduction index:					$R^*_{\text{ab,m}} = 100$	

ME171-3N, Meas.: ME17/10L/L17E00NA.PS;S1; Device: (Y); ; Date: M050401



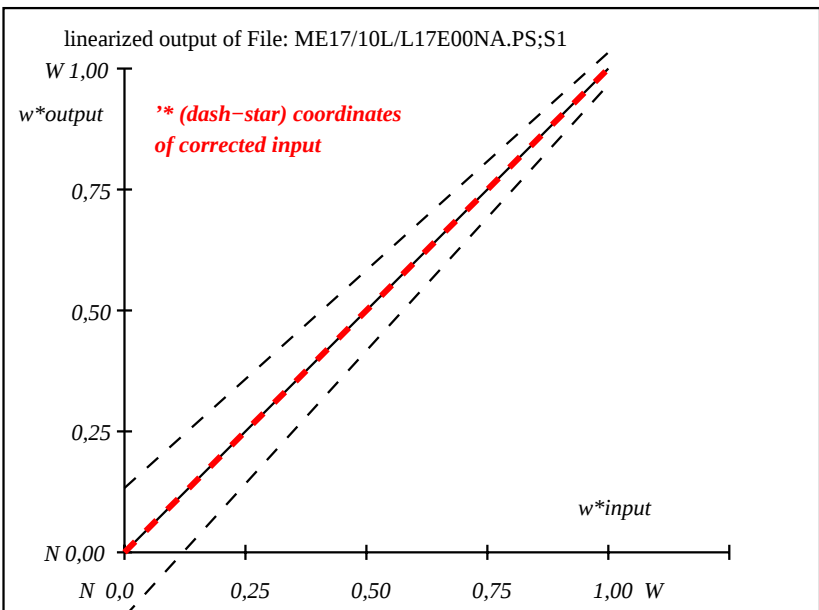


ME171-7N, File: ME17/10L/L17E00NA.PS;S1; Device: (Y); ; Date: M050401

input: w^*_{setgray}
output: w^*_{setgray}

See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

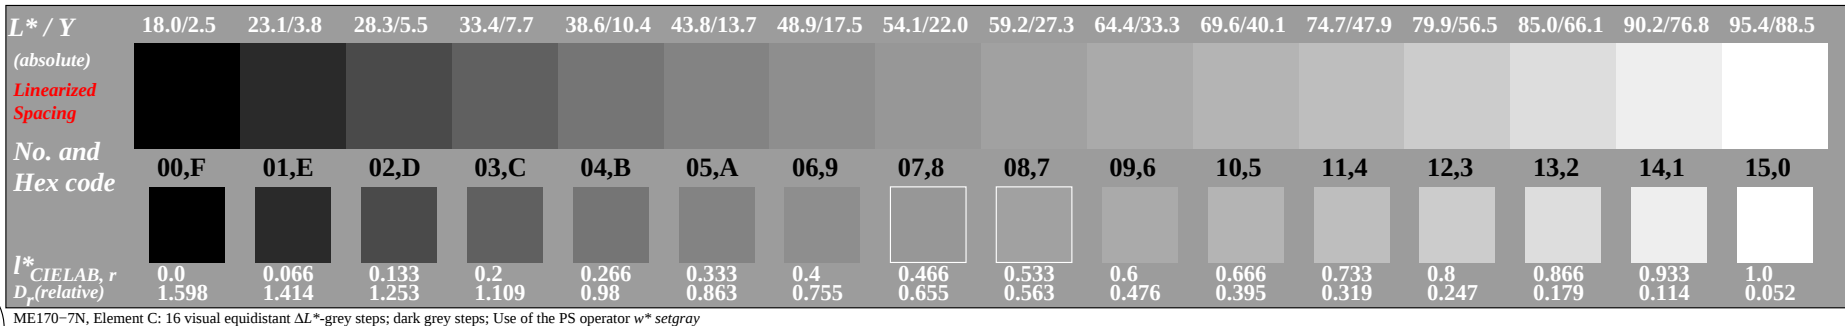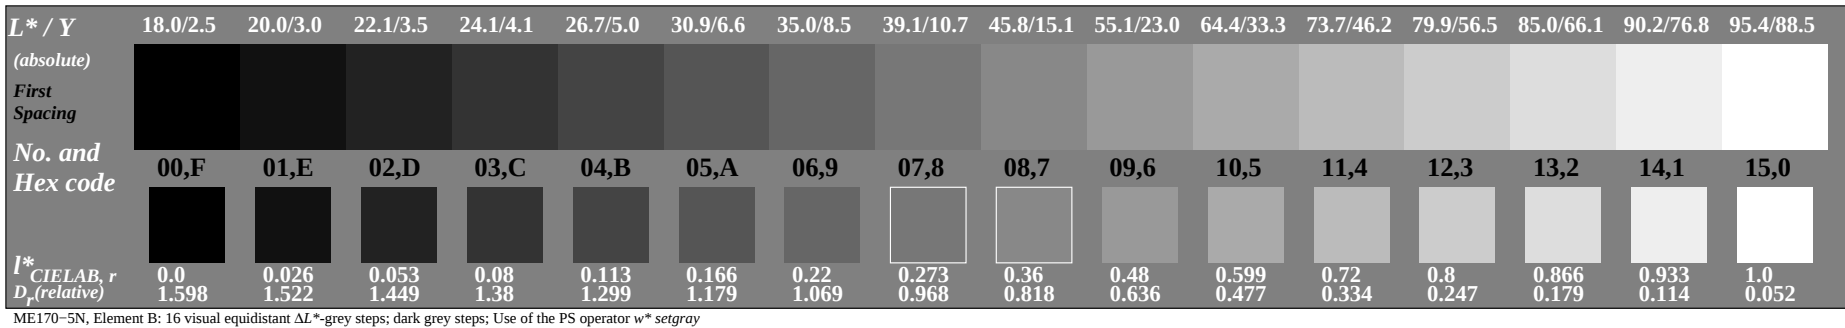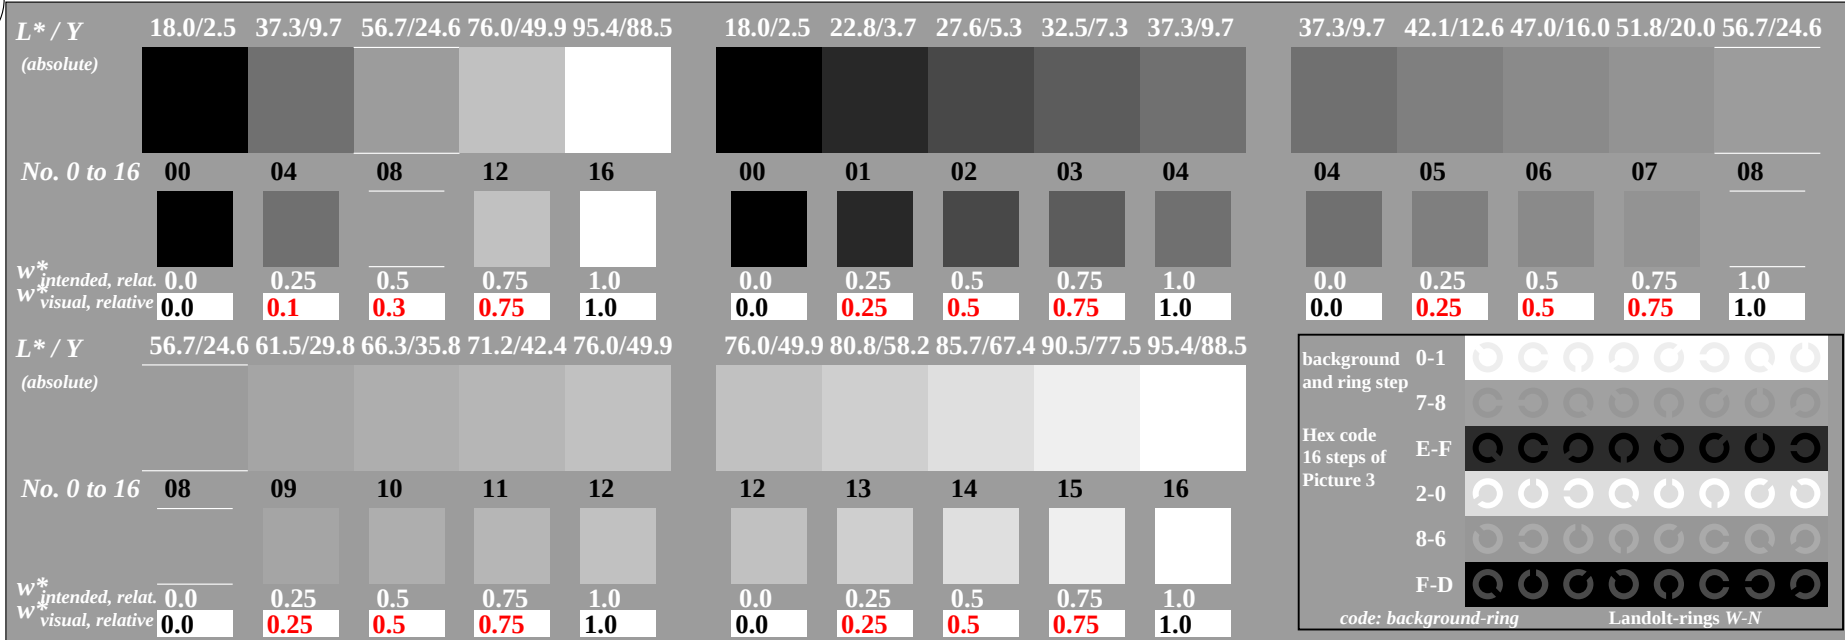

BAM registration: 20050501-ME17/10L/L17E02FA.PS/.TXT
application for displays (Yr=2.5) and printers

BAM material: code=rh4ta

See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE^*	Start output S1
1	18.0	0.0	0.0	18.0	0.0	0.0
2	23.16	0.0	0.03	20.07	0.0	0.0
3	28.32	0.0	0.05	22.13	0.0	0.0
4	33.48	0.0	0.08	24.19	0.0	0.0
5	38.64	0.0	0.11	26.77	0.0	0.0
6	43.8	0.0	0.17	30.9	0.0	0.0
7	48.96	0.0	0.22	35.03	0.0	0.0
8	54.12	0.0	0.27	39.16	0.0	0.0
9	59.28	0.0	0.36	45.87	0.0	0.0
10	64.44	0.0	0.48	55.15	0.0	0.0
11	69.6	0.0	0.6	64.43	0.0	0.0
12	74.76	0.0	0.72	73.74	0.0	0.0
13	79.92	0.0	0.8	79.92	0.0	0.0
14	85.08	0.0	0.87	85.08	0.0	0.0
15	90.24	0.0	0.93	90.25	0.0	0.0
16	95.4	0.0	1.0	95.4	0.0	0.0
17	18.0	0.0	0.0	18.0	0.0	0.0
18	37.35	0.0	0.11	26.13	0.0	0.0
19	56.7	0.0	0.32	42.52	0.0	0.0
20	76.05	0.0	0.74	75.28	0.0	0.0
21	95.4	0.0	1.0	95.4	0.0	0.0


Specification according to
ISO/IEC 15775:1999 Annex G
and DIN 33866-1:2000 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 6.3$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 5.2$

Mean colour reproduction index:
 $R^*_{\text{ab,m}} = 72$

ME171-1N, Meas.: ME17/10L/L17E00NA.PS/S1; Device: (Y); ; Date: M050401

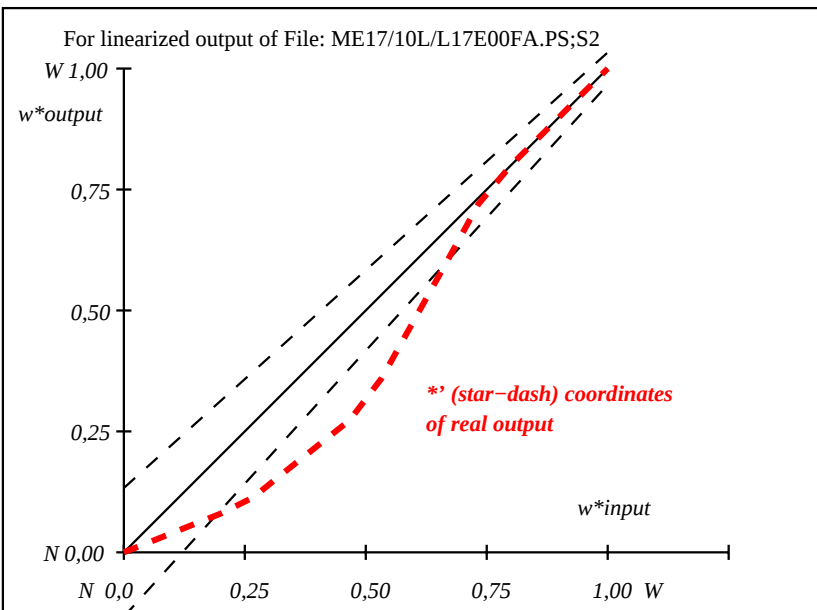

ME171-5N, File: ME17/10L/L17E00FA.PS/S2; Device: (Y); ; Date: M050401

Colorimetric specification of Page 3/4 according to ISO/IEC 15775:1999 Annex G
Page 4/4, 5 step grey scaling for visual linearisation of 16 grey steps

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE^*	Intended output S2
1	18.0	0.0	0.0	18.0	0.0	0.0
2	23.16	0.0	0.07	23.2	0.0	0.0
3	28.32	0.0	0.13	28.3	0.0	0.0
4	33.48	0.0	0.2	33.5	0.0	0.0
5	38.64	0.0	0.27	38.6	0.0	0.0
6	43.8	0.0	0.33	43.8	0.0	0.0
7	48.96	0.0	0.4	49.0	0.0	0.0
8	54.12	0.0	0.47	54.1	0.0	0.0
9	59.28	0.0	0.53	59.3	0.0	0.0
10	64.44	0.0	0.6	64.4	0.0	0.0
11	69.6	0.0	0.67	69.6	0.0	0.0
12	74.76	0.0	0.73	74.8	0.0	0.0
13	79.92	0.0	0.8	79.9	0.0	0.0
14	85.08	0.0	0.87	85.1	0.0	0.0
15	90.24	0.0	0.93	90.2	0.0	0.0
16	95.4	0.0	1.0	95.4	0.0	0.0
17	18.0	0.0	0.0	18.0	0.0	0.0
18	37.35	0.0	0.25	37.32	0.0	0.0
19	56.7	0.0	0.5	56.7	0.0	0.0
20	76.05	0.0	0.75	76.08	0.0	0.0
21	95.4	0.0	1.0	95.4	0.0	0.0


Specification according to
ISO/IEC 15775:1999 Annex G
and DIN 33866-1:2000 Annex G

Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 0.0$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 0.0$

Mean colour reproduction index:
 $R^*_{\text{ab,m}} = 100$

ME171-3N, Meas.: ME17/10L/L17E00FA.PS/S2; Device: (Y); ; Date: M050401

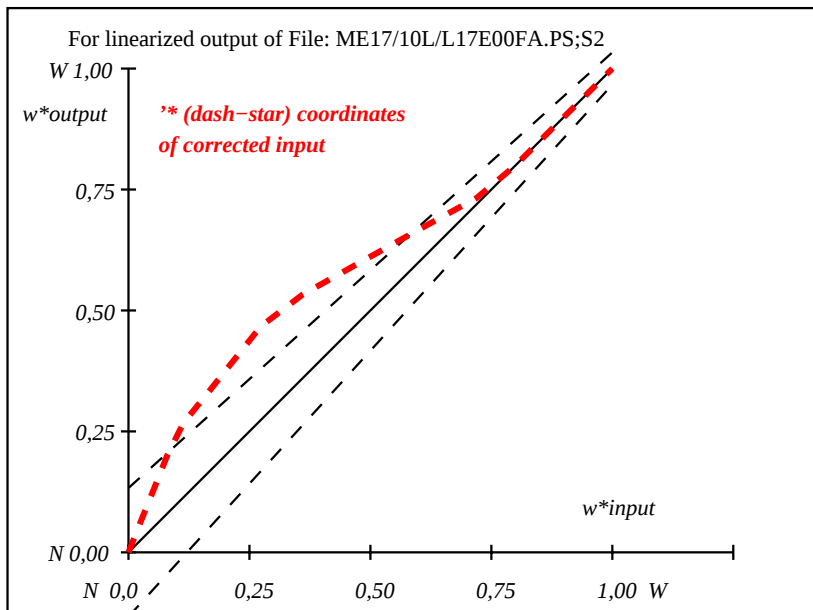

ME171-7N, File: ME17/10L/L17E00FA.PS/S2; Device: (Y); ; Date: M050401

input: w^*_{setgray}
output: w^*_{setgray}