
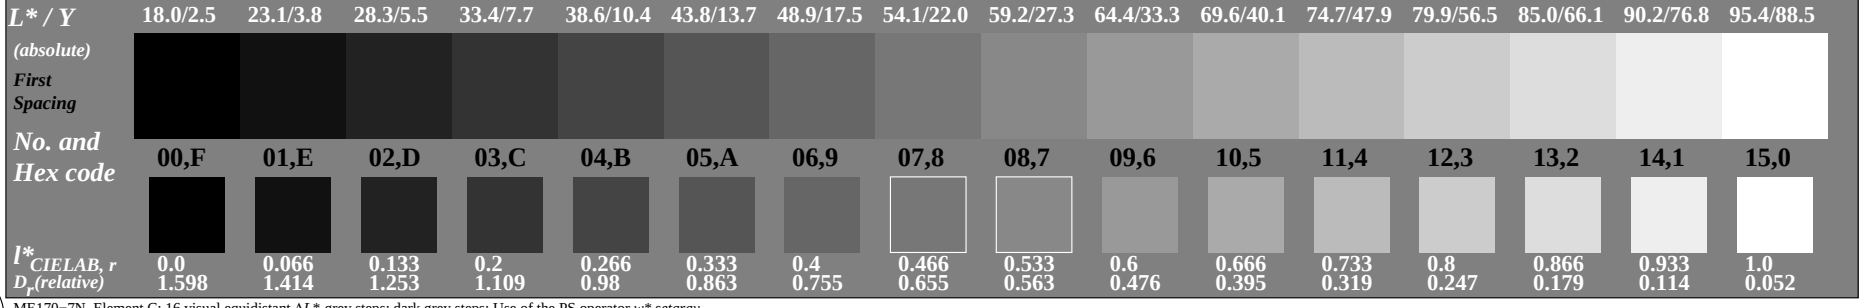
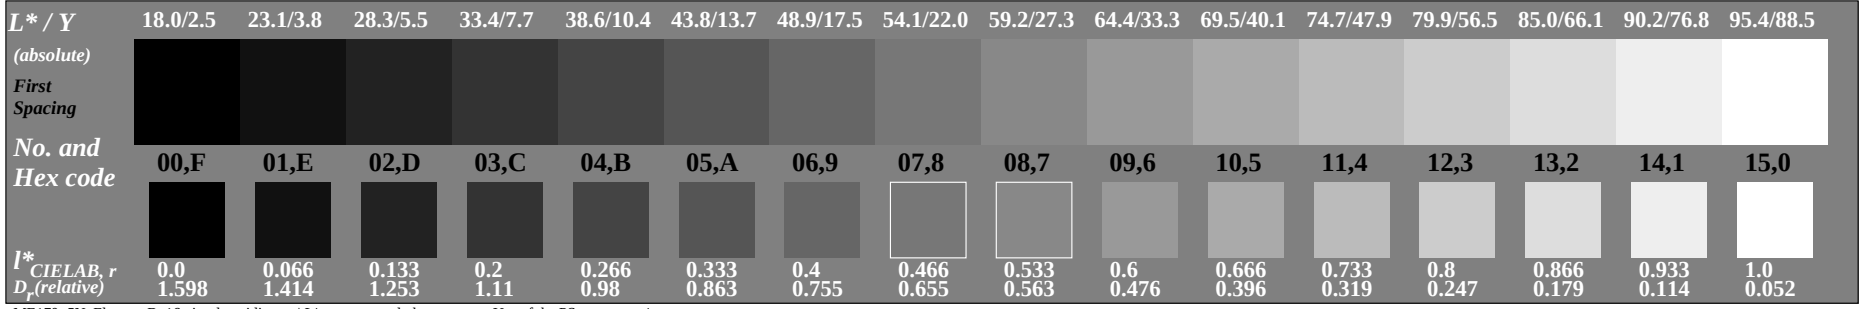


See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

BAM registration: 20050501-ME17/10L/L17E00FP.PS/.PDF
application for displays (Yr=2.5) and printers

BAM material: code=rh4ta

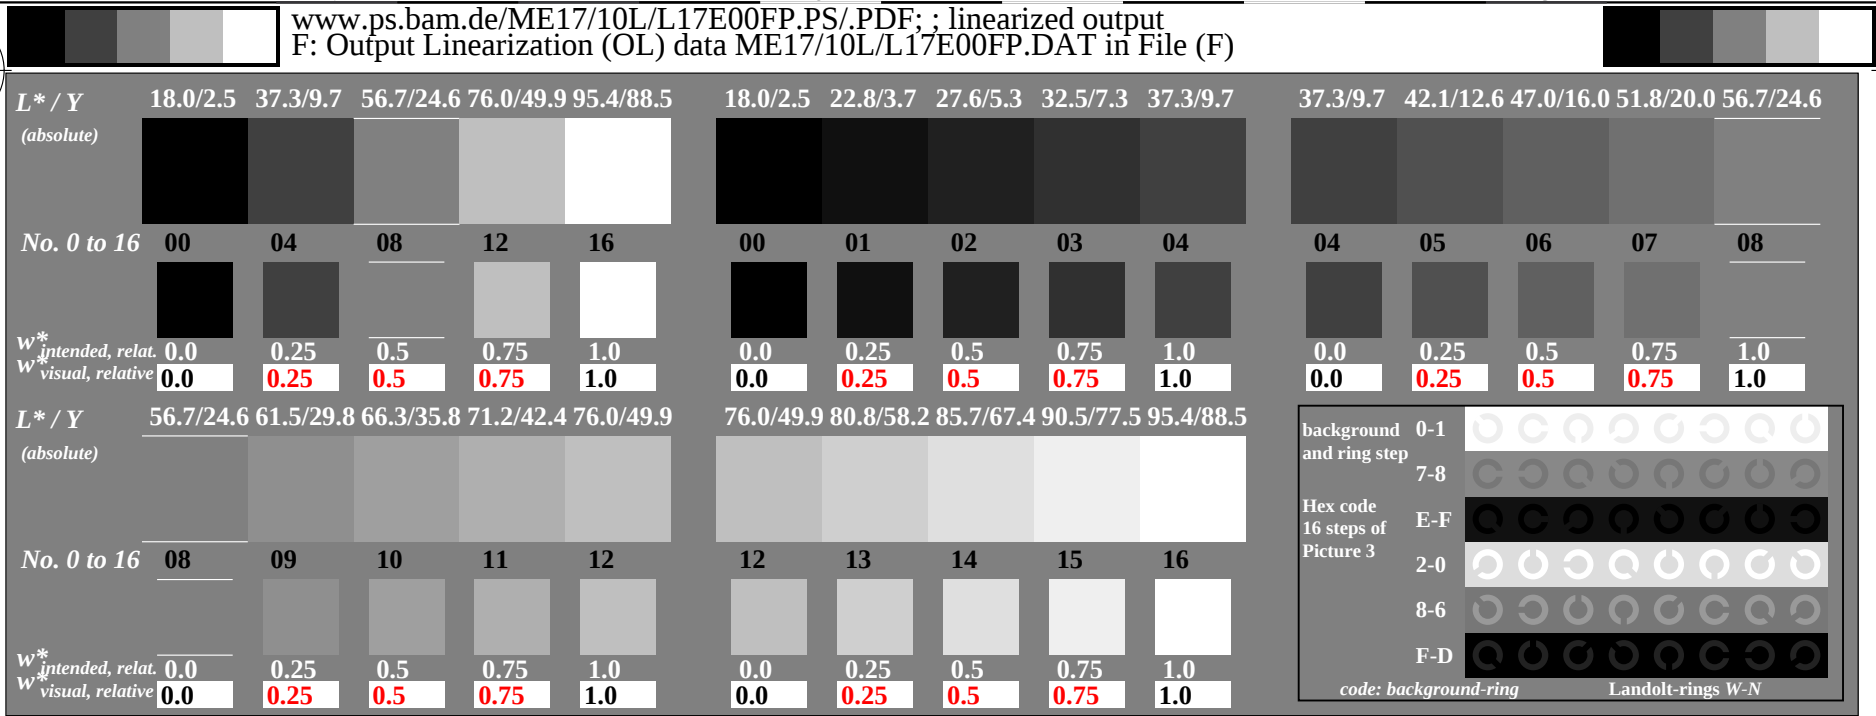


See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE^*	Start output S1
1	18.0	0.0	0.0	0.0	0.0	Specification according to
2	23.16	0.0	0.07	0.0	0.0	ISO/IEC 15775:1999 Annex G
3	28.32	0.0	0.13	0.0	0.0	and DIN 33866-1:2000 Annex G
4	33.48	0.0	0.2	0.0	0.0	
5	38.64	0.0	0.27	0.0	0.0	
6	43.8	0.0	0.33	0.0	0.0	
7	48.96	0.0	0.4	0.0	0.0	
8	54.12	0.0	0.47	0.0	0.0	
9	59.28	0.0	0.53	0.0	0.0	
10	64.44	0.0	0.6	0.0	0.0	
11	69.6	0.0	0.67	0.0	0.0	
12	74.76	0.0	0.73	0.0	0.0	
13	79.92	0.0	0.8	0.0	0.0	
14	85.08	0.0	0.87	0.0	0.0	
15	90.24	0.0	0.93	0.0	0.0	Mean lightness difference (16 steps)
16	95.4	0.0	1.0	0.0	0.0	$\Delta E^*_{\text{CIELAB}} = 0.0$
17	18.0	0.0	0.0	0.0	0.0	
18	37.35	0.0	0.25	0.0	0.0	
19	56.7	0.0	0.5	0.0	0.0	
20	76.05	0.0	0.75	0.0	0.0	Mean lightness difference (5 steps)
21	95.4	0.0	1.0	0.0	0.0	$\Delta L^*_{\text{CIELAB}} = 0.0$
Mean colour reproduction index:					$R^*_{\text{ab,m}} = 100$	

ME171-1N, Meas.: ME17/10L/L17E00NP.PDF;S1; Device: (Y); ; Date: M050401

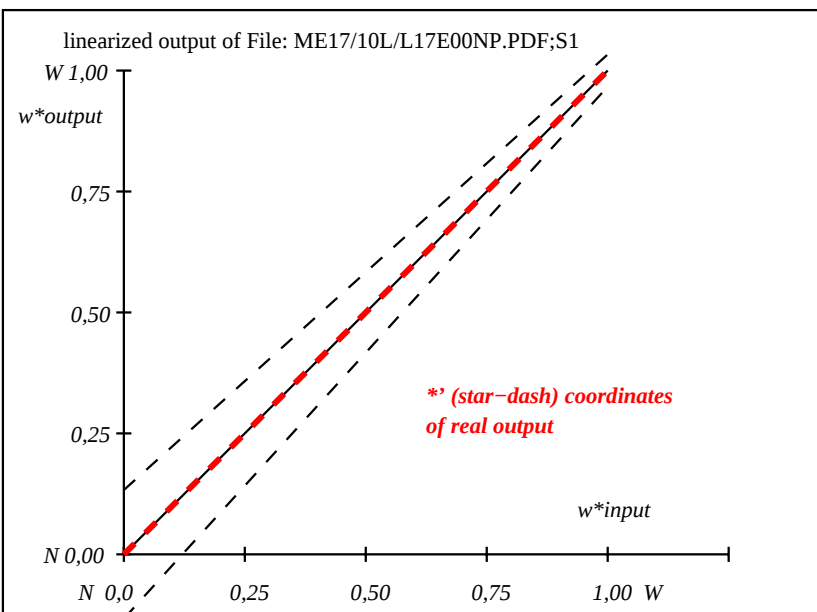


ME171-5N, File: ME17/10L/L17E00NP.PDF;S1; Device: (Y); ; Date: M050401

Colorimetric specification of Page 1/4 according to ISO/IEC 15775:1999 Annex G
Page 2/4, 5 step grey scaling for visual linearisation of 16 grey steps

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE^*	Intended output S2
1	18.0	0.0	0.0	0.0	0.0	Specification according to
2	23.16	0.0	0.07	0.0	0.0	ISO/IEC 15775:1999 Annex G
3	28.32	0.0	0.13	0.0	0.0	and DIN 33866-1:2000 Annex G
4	33.48	0.0	0.2	0.0	0.0	
5	38.64	0.0	0.27	0.0	0.0	
6	43.8	0.0	0.33	0.0	0.0	
7	48.96	0.0	0.4	0.0	0.0	
8	54.12	0.0	0.47	0.0	0.0	
9	59.28	0.0	0.53	0.0	0.0	
10	64.44	0.0	0.6	0.0	0.0	
11	69.6	0.0	0.67	0.0	0.0	
12	74.76	0.0	0.73	0.0	0.0	
13	79.92	0.0	0.8	0.0	0.0	
14	85.08	0.0	0.87	0.0	0.0	
15	90.24	0.0	0.93	0.0	0.0	Mean lightness difference (16 steps)
16	95.4	0.0	1.0	0.0	0.0	$\Delta E^*_{\text{CIELAB}} = 0.0$
17	18.0	0.0	0.0	0.0	0.0	
18	37.35	0.0	0.25	0.0	0.0	
19	56.7	0.0	0.5	0.0	0.0	
20	76.05	0.0	0.75	0.0	0.0	Mean lightness difference (5 steps)
21	95.4	0.0	1.0	0.0	0.0	$\Delta L^*_{\text{CIELAB}} = 0.0$
Mean colour reproduction index:					$R^*_{\text{ab,m}} = 100$	

ME171-3N, Meas.: ME17/10L/L17E00NP.PDF;S1; Device: (Y); ; Date: M050401



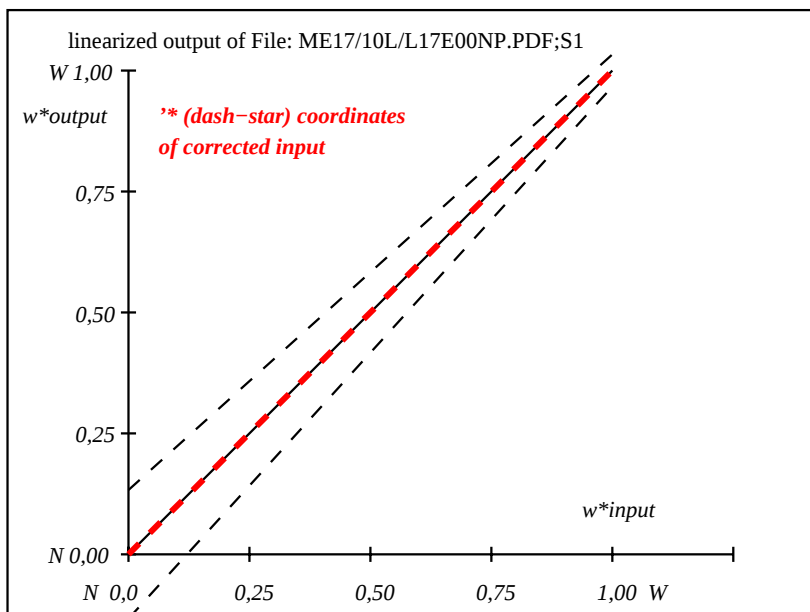


ME171-7N, File: ME17/10L/L17E00NP.PDF;S1; Device: (Y); ; Date: M050401

input: w^*_{setgray}
output: w^*_{setgray}

See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

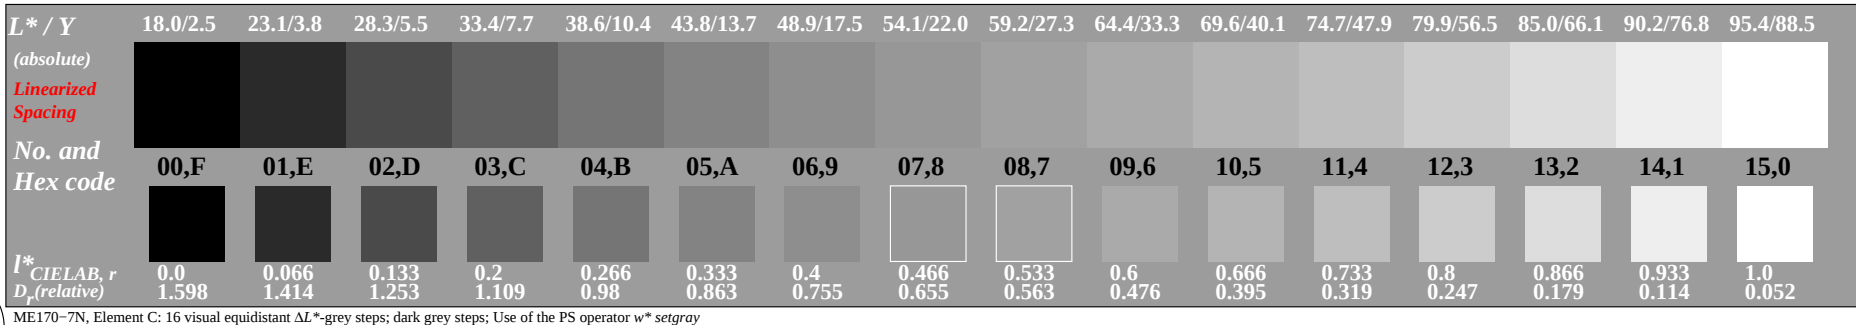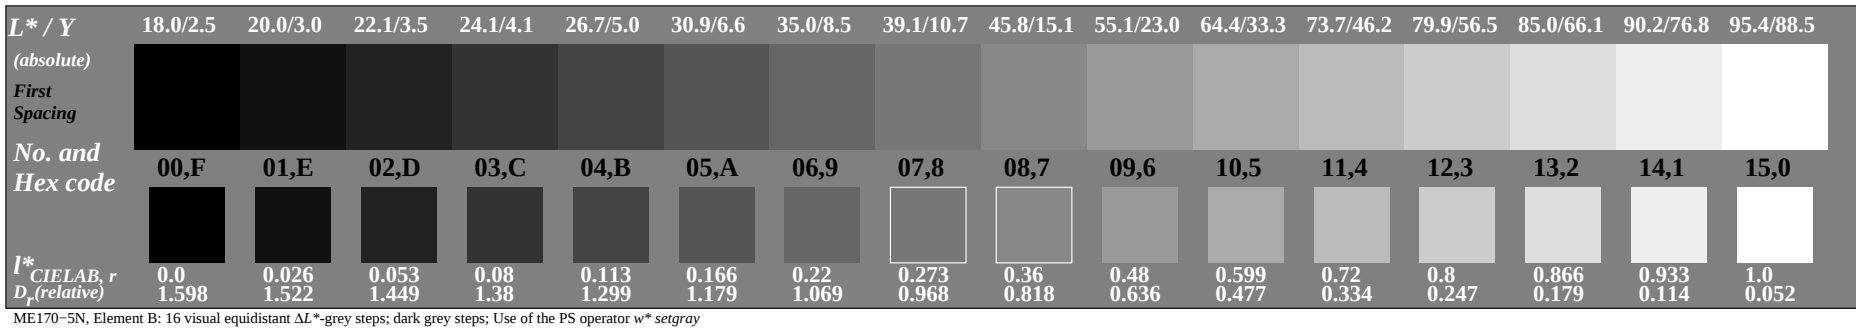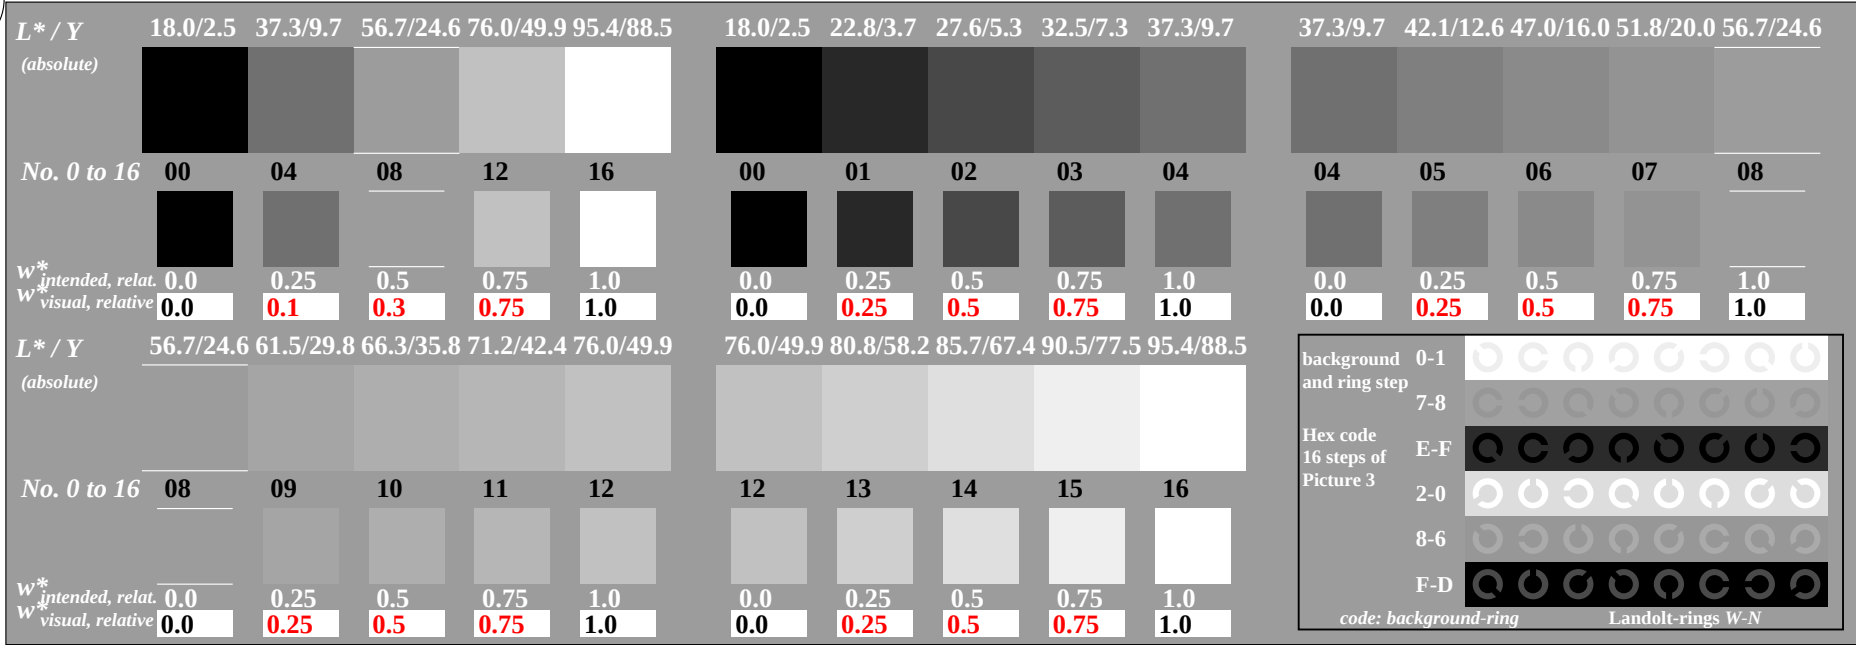


BAM registration: 20050501-ME17/10L/L17E02FP.PS/.PDF
application for displays (Yr=2.5) and printers

BAM material: code=rh4ta

i	LAB*ref		l*out		LAB*out		LAB*out/c-ref			ΔE^*	Start output S1	
1	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01	Specification according to ISO/IEC 15775:1999 Annex G and DIN 33866-1:2000 Annex G	
2	23.16	0.0	0.0	0.03	20.07	0.0	0.0	-3.08	0.0	0.0		3.09
3	28.32	0.0	0.0	0.05	22.13	0.0	0.0	-6.18	0.0	0.0		6.19
4	33.48	0.0	0.0	0.08	24.19	0.0	0.0	-9.28	0.0	0.0		9.29
5	38.64	0.0	0.0	0.11	26.77	0.0	0.0	-11.86	0.0	0.0		11.87
6	43.8	0.0	0.0	0.17	30.9	0.0	0.0	-12.89	0.0	0.0		12.9
7	48.96	0.0	0.0	0.22	35.03	0.0	0.0	-13.92	0.0	0.0		13.93
8	54.12	0.0	0.0	0.27	39.16	0.0	0.0	-14.95	0.0	0.0		14.96
9	59.28	0.0	0.0	0.36	45.87	0.0	0.0	-13.4	0.0	0.0		13.41
10	64.44	0.0	0.0	0.48	55.15	0.0	0.0	-9.28	0.0	0.0		9.29
11	69.6	0.0	0.0	0.6	64.43	0.0	0.0	-5.16	0.0	0.0		5.17
12	74.76	0.0	0.0	0.72	73.74	0.0	0.0	-1.01	0.0	0.0		1.02
13	79.92	0.0	0.0	0.8	79.92	0.0	0.0	0.0	0.0	0.0		0.01
14	85.08	0.0	0.0	0.87	85.08	0.0	0.0	0.0	0.0	0.0		0.01
15	90.24	0.0	0.0	0.93	90.25	0.0	0.0	0.01	0.0	0.0		0.01
16	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 6.3$
17	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.0	0.01
18	37.35	0.0	0.0	0.11	26.13	0.0	0.0	-11.21	0.0	0.0	11.22	
19	56.7	0.0	0.0	0.32	42.52	0.0	0.0	-14.17	0.0	0.0	14.18	
20	76.05	0.0	0.0	0.74	75.28	0.0	0.0	-0.76	0.0	0.0	0.77	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 5.2$
Mean colour reproduction index:											$R^*_{ab,m} = 72$	

ME171-1N, Meas.: ME17/10L/L17E00NP.PDF;S1; Device: (Y); ; Date: M050401

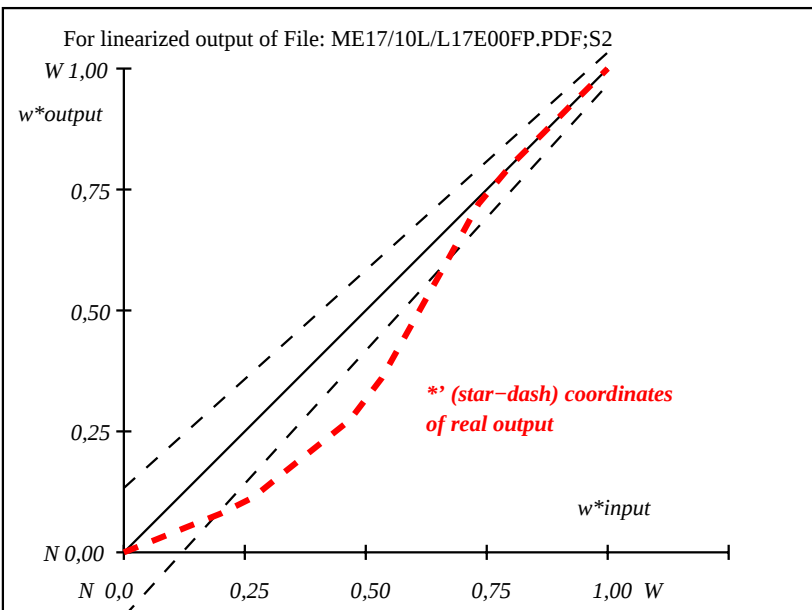


ME171-5N, File: ME17/10L/L17E00FP.PDF;S2; Device: (Y); ; Date: M050401

Colorimetric specification of Page 3/4 according to ISO/IEC 15775:1999 Annex G
Page 4/4, 5 step grey scaling for visual linearisation of 16 grey steps

i	LAB*ref		l*out		LAB*out		LAB*out/c-ref			ΔE^*	Intended output S2
1	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01	Specification according to
2	23.16	0.0	0.0	0.07	23.2	0.0	0.0	0.04	0.0	0.04	ISO/IEC 15775:1999 Annex G
3	28.32	0.0	0.0	0.13	28.3	0.0	0.0	-0.01	0.0	0.02	and DIN 33866:1:2000 Annex G
4	33.48	0.0	0.0	0.2	33.5	0.0	0.0	0.02	0.0	0.02	
5	38.64	0.0	0.0	0.27	38.6	0.0	0.0	-0.03	0.0	0.04	
6	43.8	0.0	0.0	0.33	43.8	0.0	0.0	0.0	0.0	0.01	
7	48.96	0.0	0.0	0.4	49.0	0.0	0.0	0.04	0.0	0.04	
8	54.12	0.0	0.0	0.47	54.1	0.0	0.0	-0.01	0.0	0.02	
9	59.28	0.0	0.0	0.53	59.3	0.0	0.0	0.02	0.0	0.02	
10	64.44	0.0	0.0	0.6	64.4	0.0	0.0	-0.03	0.0	0.04	
11	69.6	0.0	0.0	0.67	69.6	0.0	0.0	0.0	0.0	0.01	
12	74.76	0.0	0.0	0.73	74.8	0.0	0.0	0.04	0.0	0.04	
13	79.92	0.0	0.0	0.8	79.9	0.0	0.0	-0.01	0.0	0.02	
14	85.08	0.0	0.0	0.87	85.1	0.0	0.0	0.02	0.0	0.02	
15	90.24	0.0	0.0	0.93	90.2	0.0	0.0	-0.03	0.0	0.04	Mean lightness difference (16 steps)
16	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 0.0$
17	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	0.25	37.32	0.0	0.0	-0.02	0.0	0.03	
19	56.7	0.0	0.0	0.5	56.7	0.0	0.0	0.0	0.0	0.01	
20	76.05	0.0	0.0	0.75	76.08	0.0	0.0	0.03	0.0	0.03	Mean lightness difference (5 steps)
21	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 0.0$
Mean colour reproduction index:										$R^*_{ab,m} = 100$	

ME171-3N, Meas.: ME17/10L/L17E00FP.PDF;S2; Device: (Y); ; Date: M050401

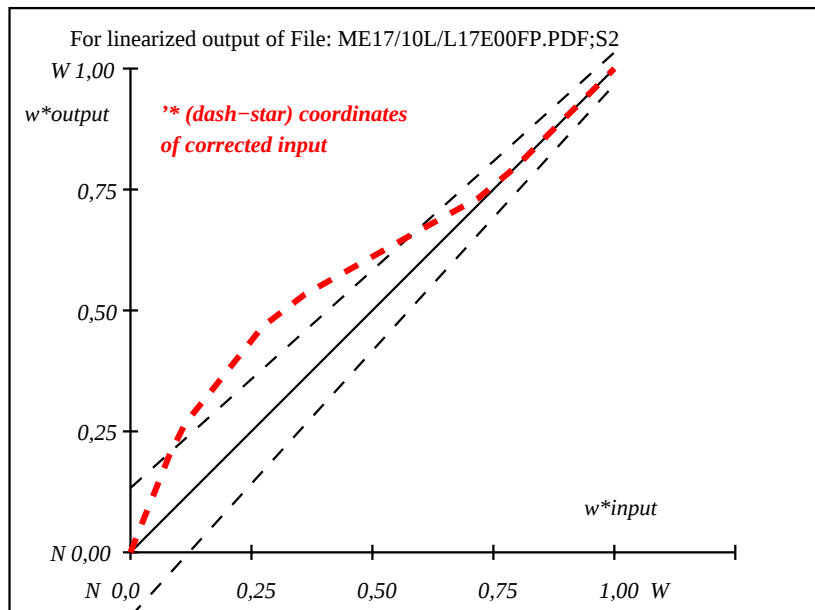

ME171-7N, File: ME17/10L/L17E00FP.PDF;S2; Device: (Y); ; Date: M050401

input: w^* setgray
output: w^* setgray