

See for similar files: <http://www.ps.bam.de/ME17/>
 Technical information: <http://www.ps.bam.de/9241/>


Version 2.1, io=1,1

BAM registration: 20050501-ME17/10L/L171
application for displays (Yr=2.5) and printers

BAM material: code=rh4ta

i	LAB*ref			l*out	LAB*out			LAB*out/c-ref			ΔE^*	Start output S1
1	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01		Specification according to
2	23.16	0.0	0.0	0.07	23.2	0.0	0.0	0.04	0.0	0.04		ISO/IEC 15775:1999 Annex G
3	28.32	0.0	0.0	0.13	28.3	0.0	0.0	-0.01	0.0	0.02		and DIN 33866:1:2000 Annex G
4	33.48	0.0	0.0	0.2	33.5	0.0	0.0	0.02	0.0	0.02		
5	38.64	0.0	0.0	0.27	38.6	0.0	0.0	-0.03	0.0	0.04		
6	43.8	0.0	0.0	0.33	43.8	0.0	0.0	0.0	0.0	0.01		
7	48.96	0.0	0.0	0.4	49.0	0.0	0.0	0.04	0.0	0.04		
8	54.12	0.0	0.0	0.47	54.1	0.0	0.0	-0.01	0.0	0.02		
9	59.28	0.0	0.0	0.53	59.3	0.0	0.0	0.02	0.0	0.02		
10	64.44	0.0	0.0	0.6	64.4	0.0	0.0	-0.03	0.0	0.04		
11	69.6	0.0	0.0	0.67	69.6	0.0	0.0	0.0	0.0	0.01		
12	74.76	0.0	0.0	0.73	74.8	0.0	0.0	0.04	0.0	0.04		
13	79.92	0.0	0.0	0.8	79.9	0.0	0.0	-0.01	0.0	0.02		
14	85.08	0.0	0.0	0.87	85.1	0.0	0.0	0.02	0.0	0.02		
15	90.24	0.0	0.0	0.93	90.2	0.0	0.0	-0.03	0.0	0.04		Mean lightness difference (16 steps)
16	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.01	$\Delta E^*_{CIELAB} = 0.0$	
17	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01		
18	37.35	0.0	0.0	0.25	37.32	0.0	0.0	-0.02	0.0	0.03		
19	56.7	0.0	0.0	0.5	56.7	0.0	0.0	0.0	0.0	0.01		
20	76.05	0.0	0.0	0.75	76.08	0.0	0.0	0.03	0.0	0.03		Mean lightness difference (5 steps)
21	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.01	$\Delta L^*_{CIELAB} = 0.0$	
Mean colour reproduction index:											$R^*_{ab,m} = 100$	


ME171-1N, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

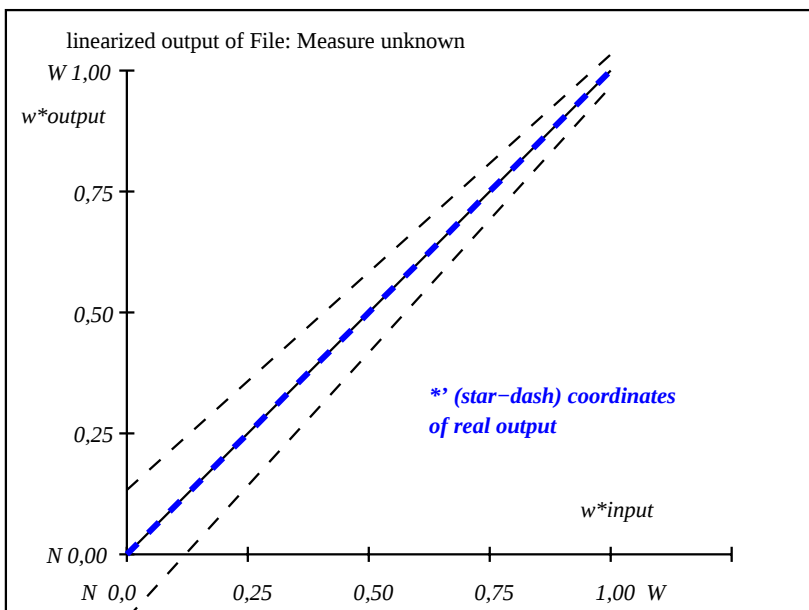

ME171-5N, File: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref		l*out		LAB*out		LAB*out/c-ref				ΔE^*	Intended output S2	
1	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01	Specification according to ISO/IEC 15775:1999 Annex G and DIN 33866-1:2000 Annex G	
2	23.16	0.0	0.0	0.07	23.2	0.0	0.0	0.04	0.0	0.0	0.04		
3	28.32	0.0	0.0	0.13	28.3	0.0	0.0	-0.01	0.0	0.0	0.02		
4	33.48	0.0	0.0	0.2	33.5	0.0	0.0	0.02	0.0	0.0	0.02		
5	38.64	0.0	0.0	0.27	38.6	0.0	0.0	-0.03	0.0	0.0	0.04		
6	43.8	0.0	0.0	0.33	43.8	0.0	0.0	0.0	0.0	0.0	0.01		
7	48.96	0.0	0.0	0.4	49.0	0.0	0.0	0.04	0.0	0.0	0.04		
8	54.12	0.0	0.0	0.47	54.1	0.0	0.0	-0.01	0.0	0.0	0.02		
9	59.28	0.0	0.0	0.53	59.3	0.0	0.0	0.02	0.0	0.0	0.02		
10	64.44	0.0	0.0	0.6	64.4	0.0	0.0	-0.03	0.0	0.0	0.04		
11	69.6	0.0	0.0	0.67	69.6	0.0	0.0	0.0	0.0	0.0	0.01		
12	74.76	0.0	0.0	0.73	74.8	0.0	0.0	0.04	0.0	0.0	0.04		
13	79.92	0.0	0.0	0.8	79.9	0.0	0.0	-0.01	0.0	0.0	0.02		
14	85.08	0.0	0.0	0.87	85.1	0.0	0.0	0.02	0.0	0.0	0.02		
15	90.24	0.0	0.0	0.93	90.2	0.0	0.0	-0.03	0.0	0.0	0.04		Mean lightness difference (16 steps)
16	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01		$\Delta E^*_{\text{CIELAB}} = 0.0$
17	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.0	0.01		
18	37.35	0.0	0.0	0.25	37.32	0.0	0.0	-0.02	0.0	0.0	0.03		
19	56.7	0.0	0.0	0.5	56.7	0.0	0.0	0.0	0.0	0.0	0.01		
20	76.05	0.0	0.0	0.75	76.08	0.0	0.0	0.03	0.0	0.0	0.03		Mean lightness difference (5 steps)
21	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.0	0.01		$\Delta L^*_{\text{CIELAB}} = 0.0$
Mean colour reproduction index:											$R^*_{\text{ab,m}} = 100$		

ME171-3N, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

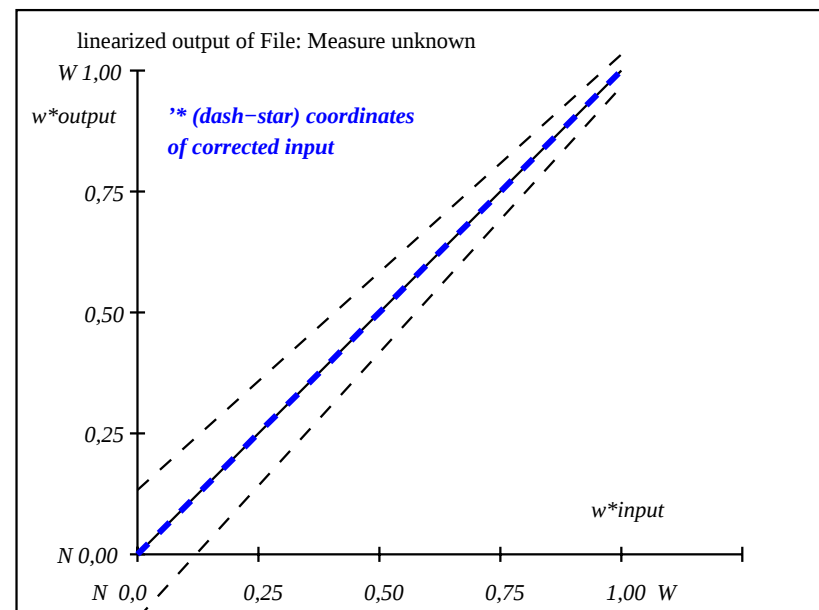

ME171-7N, File: Measure unknown; Device: Device unknown; Date: Date unknown

Colorimetric specification of Page 1/4 according to ISO/IEC 15775:1999 Annex G
Page 2/4, 5 step grey scaling for visual linearisation of 16 grey steps


input: w^* setgray
output: w^* setgray

See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>


Version 2.1, io=1,1

BAM registration: 20050501-ME17/10L/L17E02NA.PS/.TXT
application for displays (Yr=2.5) and printers


BAM material: code=rh4ta

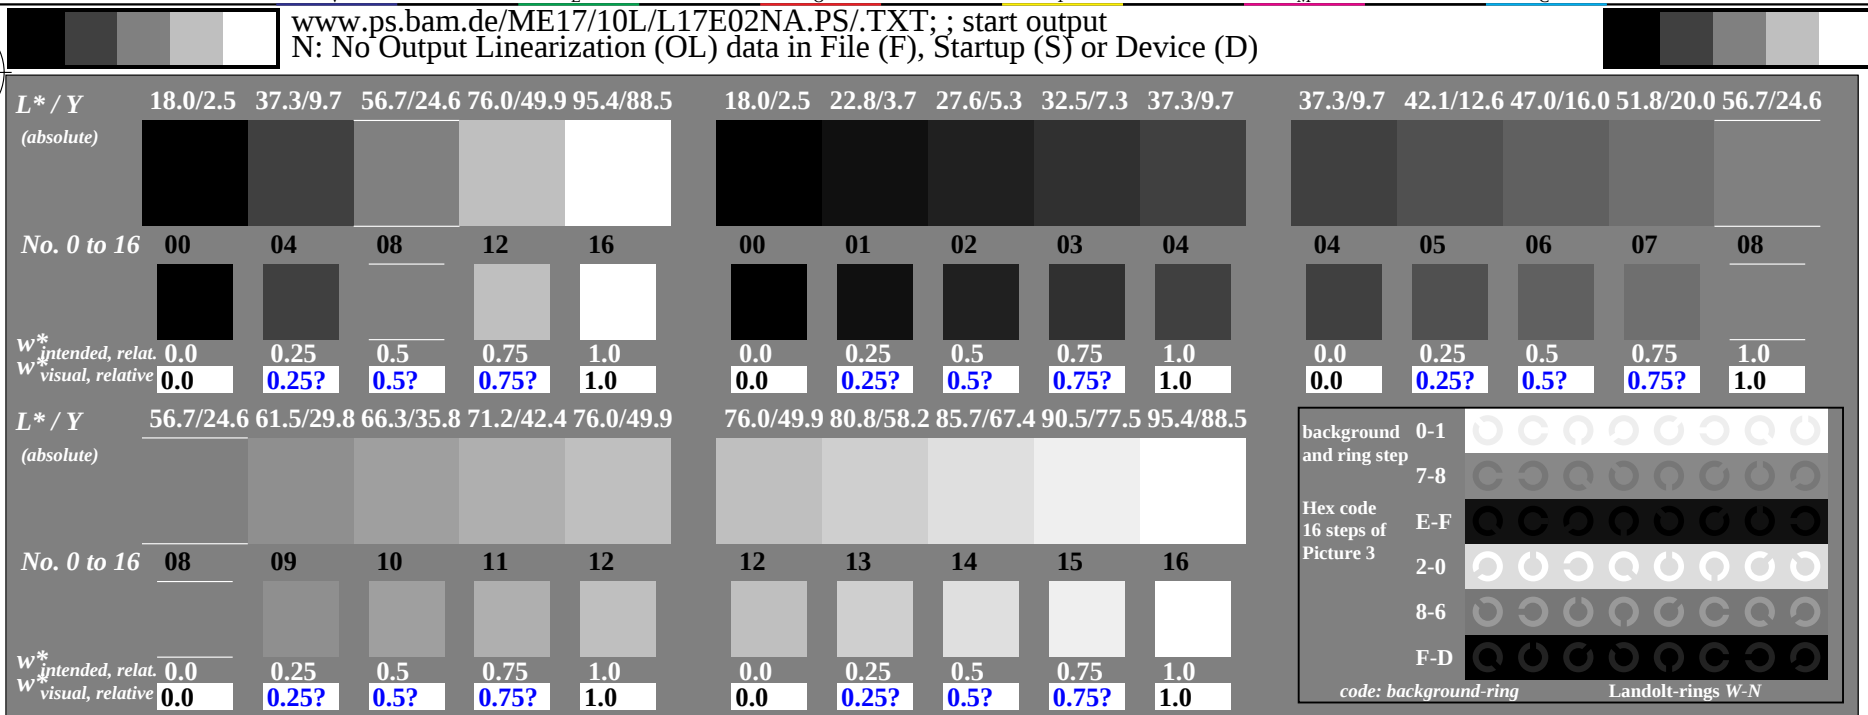

ME170-3N, Element A: 5 times 5 visual equidistant L*-grey steps and Landolt-rings; Use of the PS operator w* setgray

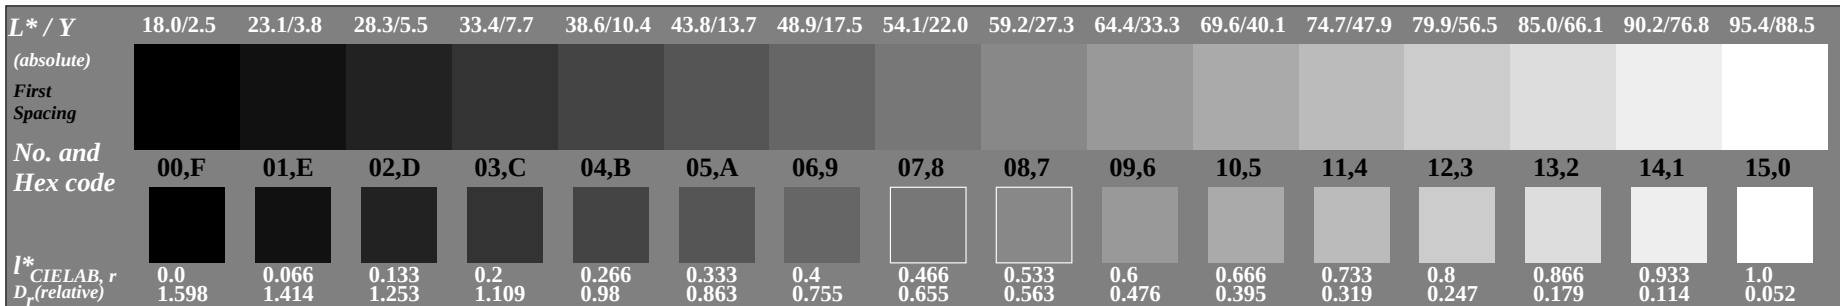

ME170-5N, Element B: 16 visual equidistant ΔL*-grey steps; dark grey steps; Use of the PS operator w* setgray

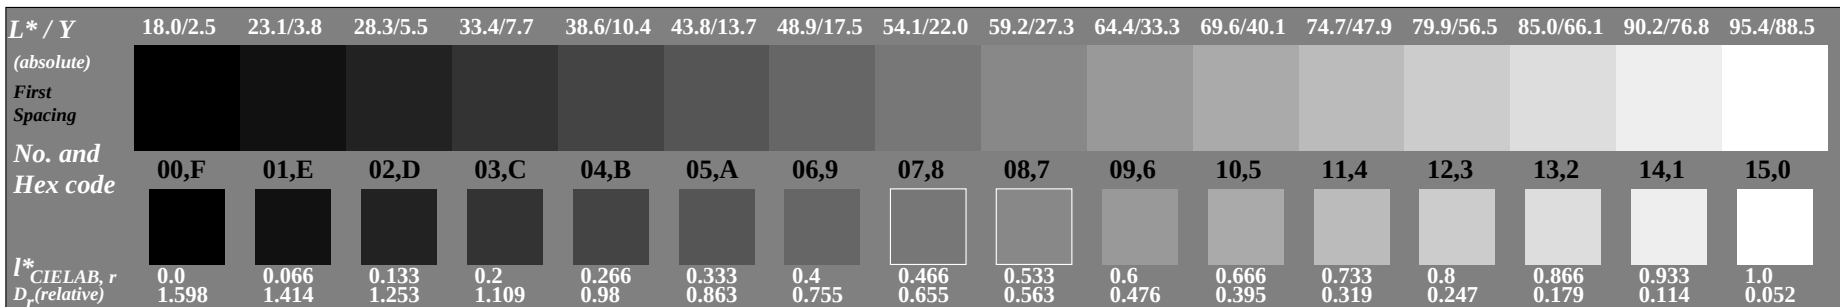


ME170-7N, Element C: 16 visual equidistant ΔL*-grey steps; dark grey steps; Use of the PS operator w* setgray

See for similar files: <http://www.ps.bam.de/ME17/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.1, io=1,1

i	LAB*ref		l*out		LAB*out		LAB*out/c-ref			ΔE^*	Start output S1
1	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01	Specification according to ISO/IEC 15775:1999 Annex G and DIN 33866-1:2000 Annex G
2	23.16	0.0	0.0	0.07	23.2	0.0	0.0	0.04	0.0	0.04	
3	28.32	0.0	0.0	0.13	28.3	0.0	0.0	-0.01	0.0	0.02	
4	33.48	0.0	0.0	0.2	33.5	0.0	0.0	0.02	0.0	0.02	
5	38.64	0.0	0.0	0.27	38.6	0.0	0.0	-0.03	0.0	0.04	
6	43.8	0.0	0.0	0.33	43.8	0.0	0.0	0.0	0.0	0.01	
7	48.96	0.0	0.0	0.4	49.0	0.0	0.0	0.04	0.0	0.04	
8	54.12	0.0	0.0	0.47	54.1	0.0	0.0	-0.01	0.0	0.02	
9	59.28	0.0	0.0	0.53	59.3	0.0	0.0	0.02	0.0	0.02	
10	64.44	0.0	0.0	0.6	64.4	0.0	0.0	-0.03	0.0	0.04	
11	69.6	0.0	0.0	0.67	69.6	0.0	0.0	0.0	0.0	0.01	
12	74.76	0.0	0.0	0.73	74.8	0.0	0.0	0.04	0.0	0.04	
13	79.92	0.0	0.0	0.8	79.9	0.0	0.0	-0.01	0.0	0.02	
14	85.08	0.0	0.0	0.87	85.1	0.0	0.0	0.02	0.0	0.02	
15	90.24	0.0	0.0	0.93	90.2	0.0	0.0	-0.03	0.0	0.04	
16	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.01	
17	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01	
18	37.35	0.0	0.0	0.25	37.32	0.0	0.0	-0.02	0.0	0.03	
19	56.7	0.0	0.0	0.5	56.7	0.0	0.0	0.0	0.0	0.01	
20	76.05	0.0	0.0	0.75	76.08	0.0	0.0	0.03	0.0	0.03	
21	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.01	
Mean colour reproduction index:										$R^*_{ab,m} = 100$	

ME171-1N, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

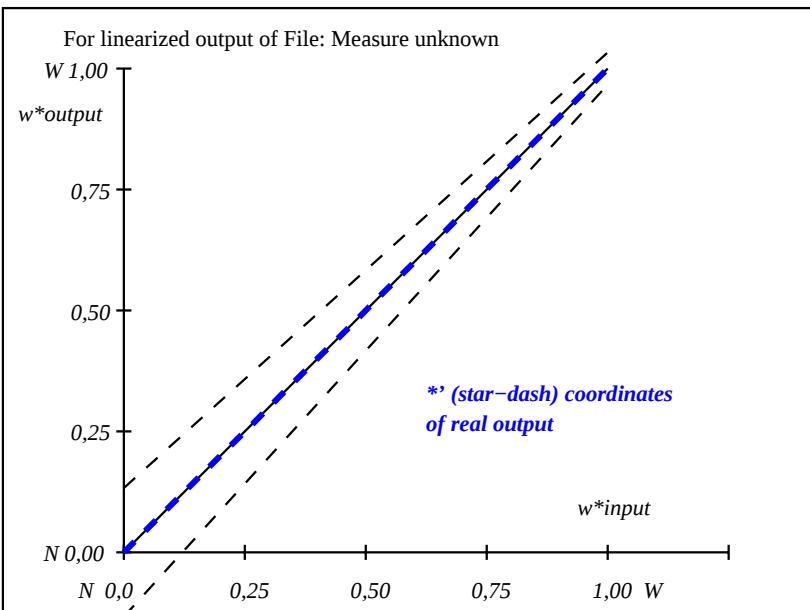


ME171-5N, File: Measure unknown; Device: Device unknown; Date: Date unknown

Colorimetric specification of Page 3/4 according to ISO/IEC 15775:1999 Annex G
Page 4/4, 5 step grey scaling for visual linearisation of 16 grey steps

i	LAB*ref		L*out		LAB*out		LAB*out/c-ref			ΔE*	Intended output S2	
1	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01	Specification according to ISO/IEC 15775:1999 Annex G and DIN 33866-1:2000 Annex G	
2	23.16	0.0	0.0	0.07	23.2	0.0	0.0	0.04	0.0	0.04		
3	28.32	0.0	0.0	0.13	28.3	0.0	0.0	-0.01	0.0	0.02		
4	33.48	0.0	0.0	0.2	33.5	0.0	0.0	0.02	0.0	0.02		
5	38.64	0.0	0.0	0.27	38.6	0.0	0.0	-0.03	0.0	0.04		
6	43.8	0.0	0.0	0.33	43.8	0.0	0.0	0.0	0.0	0.01		
7	48.96	0.0	0.0	0.4	49.0	0.0	0.0	0.04	0.0	0.04		
8	54.12	0.0	0.0	0.47	54.1	0.0	0.0	-0.01	0.0	0.02		
9	59.28	0.0	0.0	0.53	59.3	0.0	0.0	0.02	0.0	0.02		
10	64.44	0.0	0.0	0.6	64.4	0.0	0.0	-0.03	0.0	0.04		
11	69.6	0.0	0.0	0.67	69.6	0.0	0.0	0.0	0.0	0.01		
12	74.76	0.0	0.0	0.73	74.8	0.0	0.0	0.04	0.0	0.04		
13	79.92	0.0	0.0	0.8	79.9	0.0	0.0	-0.01	0.0	0.02		
14	85.08	0.0	0.0	0.87	85.1	0.0	0.0	0.02	0.0	0.02		
15	90.24	0.0	0.0	0.93	90.2	0.0	0.0	-0.03	0.0	0.04		Mean lightness difference (16 steps)
16	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.01		ΔE* _{CIELAB} = 0.0
17	18.0	0.0	0.0	0.0	18.0	0.0	0.0	0.0	0.0	0.01		
18	37.35	0.0	0.0	0.25	37.32	0.0	0.0	-0.02	0.0	0.03		
19	56.7	0.0	0.0	0.5	56.7	0.0	0.0	0.0	0.0	0.01		
20	76.05	0.0	0.0	0.75	76.08	0.0	0.0	0.03	0.0	0.03		Mean lightness difference (5 steps)
21	95.4	0.0	0.0	1.0	95.4	0.0	0.0	0.0	0.0	0.01		ΔL* _{CIELAB} = 0.0
Mean colour reproduction index:										R* _{ab,m} = 100		

ME171-3N, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

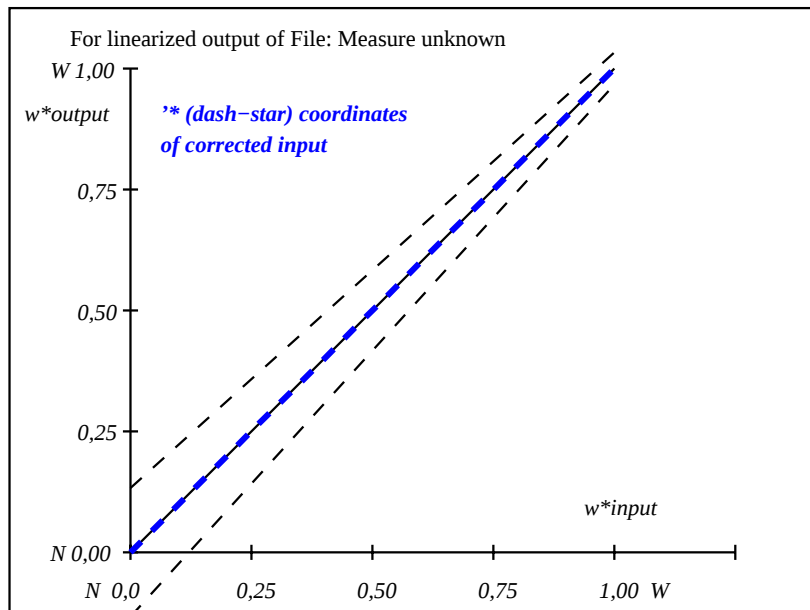

ME171-7N, File: Measure unknown; Device: Device unknown; Date: Date unknown

input: w^*_{setgray}
output: w^*_{setgray}