


MG030-2, Bild C5: Linienraster unter 45° (oder 135°); Benutzung des PS-Operators w* setgray

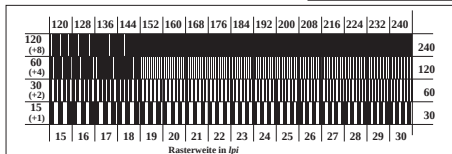

MG031-1, Bild C6: Linienraster unter 90° (oder 0°); Benutzung des PS-Operators w* setgray

L* / Y (absolut)	18.0/2.5	20.4/3.1	22.9/3.7	25.4/4.5	27.9/5.4	30.4/6.4	32.9/7.5	35.4/8.7	37.9/10.0	40.4/11.5	42.9/13.1	45.4/14.8	47.9/16.7	50.4/18.8	52.9/21.0	55.4/23.3
Nr. und Hex-Code	00,W	01,V	02,U	03,T	04,S	05,R	06,Q	07,P	08,O	09,N	10,M	11,L	12,J	13,I	14,H	15,G
I* _{CIE LAB, r} D _r (relativ)	0.0 1.598	0.032 1.506	0.064 1.42	0.096 1.339	0.129 1.263	0.161 1.191	0.193 1.123	0.225 1.058	0.258 0.996	0.29 0.937	0.322 0.881	0.354 0.827	0.387 0.775	0.419 0.725	0.451 0.677	0.483 0.631

ME000-3, Bild C31: 32 visuell gleichabständige L*-Graustufen; Benutzung des PS-Operators w* setgray, Teil 1

L* / Y (absolut)	57.9/25.9	60.4/28.6	62.9/31.5	65.4/34.6	67.9/37.8	70.4/41.3	72.9/45.0	75.4/48.9	77.9/53.0	80.4/57.4	82.9/62.0	85.4/66.8	87.9/71.8	90.4/77.1	92.9/82.7	95.4/88.5
Nr. und Hex-Code	16,F	17,E	18,D	19,C	20,B	21,A	22,9	23,8	24,7	25,6	26,5	27,4	28,3	29,2	30,1	31,0
I* _{CIE LAB, r} D _r (relativ)	0.516 0.586	0.548 0.543	0.58 0.501	0.612 0.46	0.645 0.421	0.677 0.383	0.709 0.346	0.741 0.31	0.774 0.275	0.806 0.24	0.838 0.207	0.87 0.175	0.903 0.143	0.935 0.112	0.967 0.082	1.0 0.052

ME000-5, Bild C32: 32 visuell gleichabständige L*-Graustufen; Benutzung des PS-Operators w* setgray, Teil 2

L* / Y (absolut)	18.0/2.5	20.4/3.1	22.9/3.7	25.4/4.5	27.9/5.4	30.4/6.4	32.9/7.5	35.4/8.7	37.9/10.0	40.4/11.5	42.9/13.1	45.4/14.8	47.9/16.7	50.4/18.8	52.9/21.0	55.4/23.3
Nr. und Hex-Code	00,F	01,E	02,D	03,C	04,B	05,A	06,9	07,8	08,7	09,6	10,5	11,4	12,3	13,2	14,1	15,0
I* _{CIE LAB, r} D _r (relativ)	0.0 1.598	0.032 1.506	0.064 1.42	0.096 1.339	0.129 1.263	0.161 1.191	0.193 1.123	0.225 1.058	0.258 0.996	0.29 0.937	0.322 0.881	0.354 0.827	0.387 0.775	0.419 0.725	0.451 0.677	0.483 0.631

MG030-7, Bild C3: 16 visuell gleichabständige L*-Graustufen; Benutzung des PS-Operators w* setgray

Proposal editor: CEN CSH 99013-Prüfvorlage Nr. 3N
Grafikseite, Prüfvorlage Nr. 3 mit grafischen Elementen von ISO/IEC 15700-1

input: 000x* setcmykcolor
output: 000x* setcmykcolor