


i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	0.0	0.0	0.01	0.0	0.01	Kennzeichnung nach
2	6.36	0.0	0.07	0.0	0.01	ISO/IEC 15775:1999 Anhang G
3	12.72	0.0	0.13	0.0	0.01	
4	19.08	0.0	0.2	0.0	0.01	
5	25.44	0.0	0.27	0.0	0.01	
6	31.8	0.0	0.33	0.0	0.01	
7	38.16	0.0	0.4	0.0	0.01	
8	44.52	0.0	0.47	0.0	0.01	
9	50.89	0.0	0.53	0.0	0.01	
10	57.25	0.0	0.6	0.0	0.01	
11	63.61	0.0	0.67	0.0	0.01	
12	69.97	0.0	0.73	0.0	0.01	
13	76.33	0.0	0.8	0.0	0.01	
14	82.69	0.0	0.87	0.0	0.01	
15	89.05	0.0	0.93	0.0	0.01	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	0.0	0.01	ΔE*CIELAB = 0.0
17	0.0	0.0	0.01	0.0	0.01	
18	23.85	0.0	0.25	0.0	0.01	
19	47.71	0.0	0.5	0.0	0.01	
20	71.56	0.0	0.75	0.0	0.01	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	0.0	0.01	ΔL*CIELAB = 0.0
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 100	


MG150-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Ziel-Ausgabe S2
1	0.0	0.0	0.01	0.0	0.01	Kennzeichnung nach
2	6.36	0.0	0.07	0.0	0.01	ISO/IEC 15775:1999 Anhang G
3	12.72	0.0	0.13	0.0	0.01	
4	19.08	0.0	0.2	0.0	0.01	
5	25.44	0.0	0.27	0.0	0.01	
6	31.8	0.0	0.33	0.0	0.01	
7	38.16	0.0	0.4	0.0	0.01	
8	44.52	0.0	0.47	0.0	0.01	
9	50.89	0.0	0.53	0.0	0.01	
10	57.25	0.0	0.6	0.0	0.01	
11	63.61	0.0	0.67	0.0	0.01	
12	69.97	0.0	0.73	0.0	0.01	
13	76.33	0.0	0.8	0.0	0.01	
14	82.69	0.0	0.87	0.0	0.01	
15	89.05	0.0	0.93	0.0	0.01	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	0.0	0.01	ΔE*CIELAB = 0.0
17	0.0	0.0	0.01	0.0	0.01	
18	23.85	0.0	0.25	0.0	0.01	
19	47.71	0.0	0.5	0.0	0.01	
20	71.56	0.0	0.75	0.0	0.01	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	0.0	0.01	ΔL*CIELAB = 0.0
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 100	


MG151-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

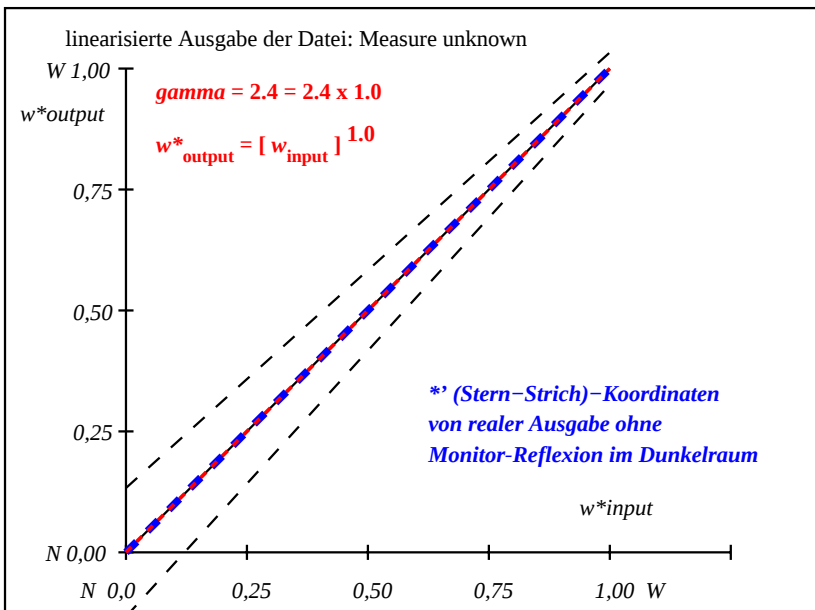


MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

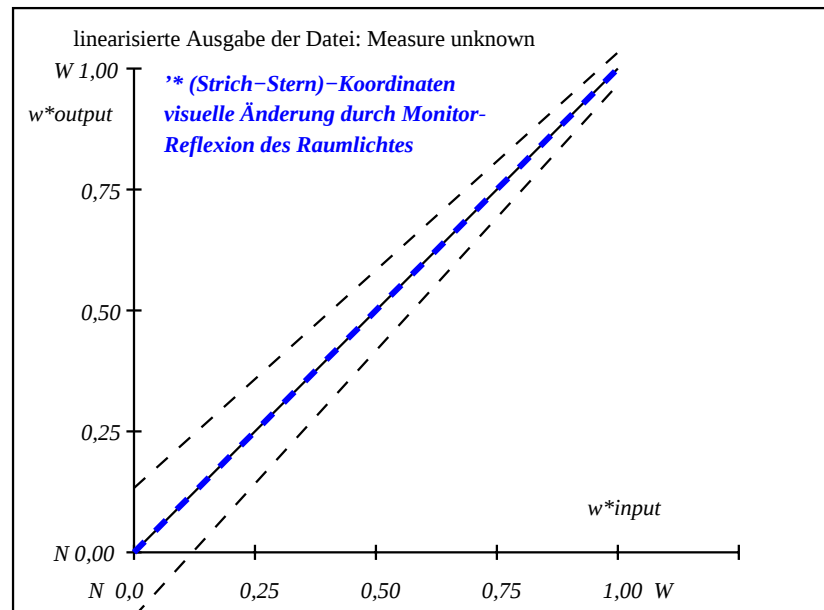


MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown




Radialgitter (Siemensstern) N-W



Radialgitter (Siemensstern) W-N

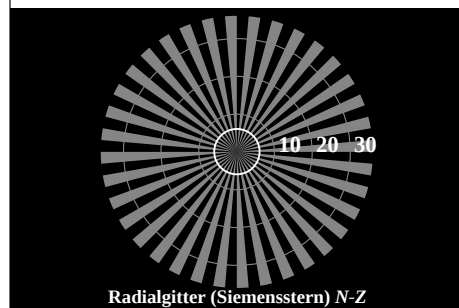


Radialgitter (Siemensstern) N-Z




Radialgitter (Siemensstern) W-Z

MG150-3, Element A: Radialgitter (Siemenssterne) N-W, W-N, N-Z und W-Z; PS-Operator: w* setgray

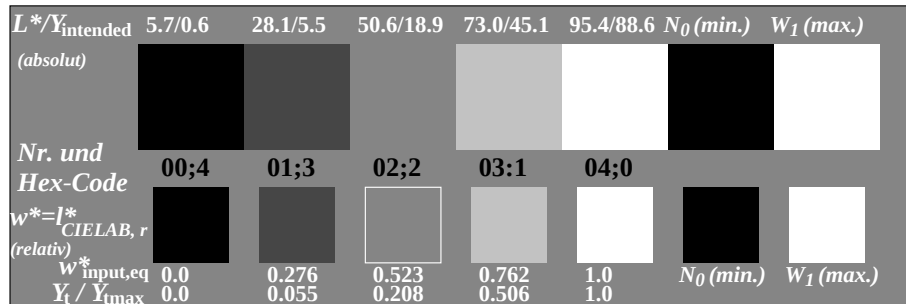

MG150-5, Element B: 5 visuell gleichabständige L^* -Graustufen + N_0 + W_1 ; PS-Operator: w* setgray

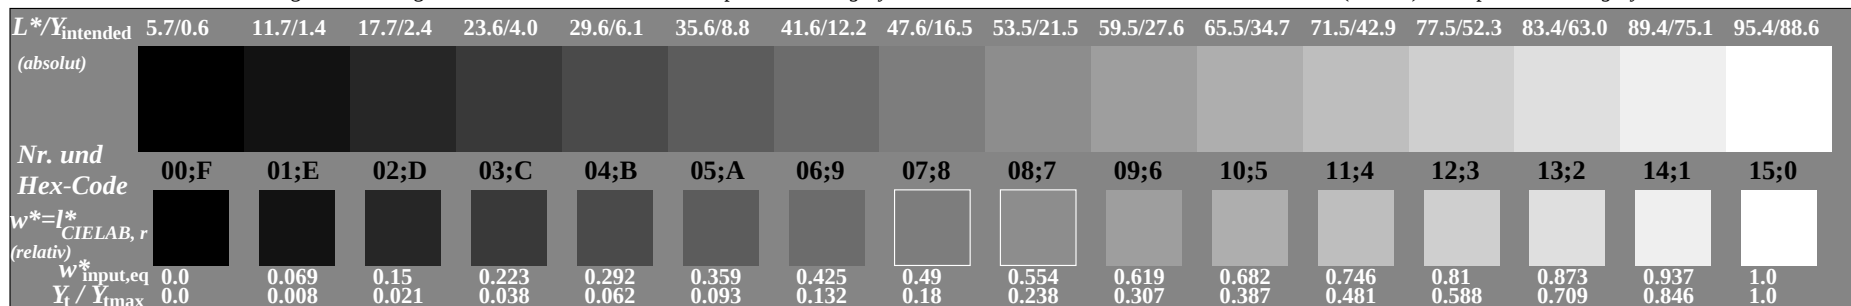


MG150-7, Element C: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: w* setgray

Umfeldstufe	0	7	E	2	8	F
Hex-Code						
Ringstufe	0-1	7-8	E-F	2-0	8-6	F-D
Hex-Code						

Landoltringe W-N


Code: Umfeld-Ring

MG151-1, Element D: Landoltringe W-N; PS-Operator: w* setgray

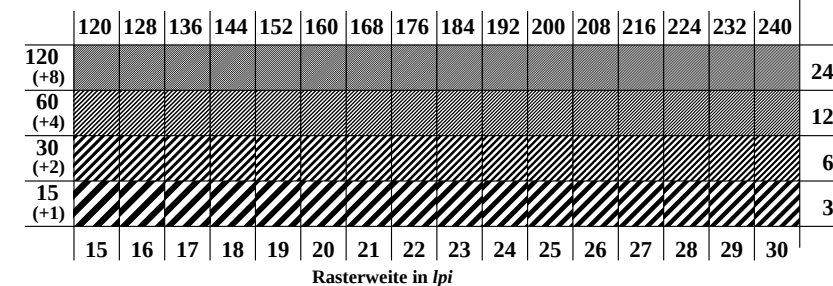

Rasterweite in lpi

MG151-3, Element E: Linienraster unter 45° (oder 135°); PS-Operator: w* setgray

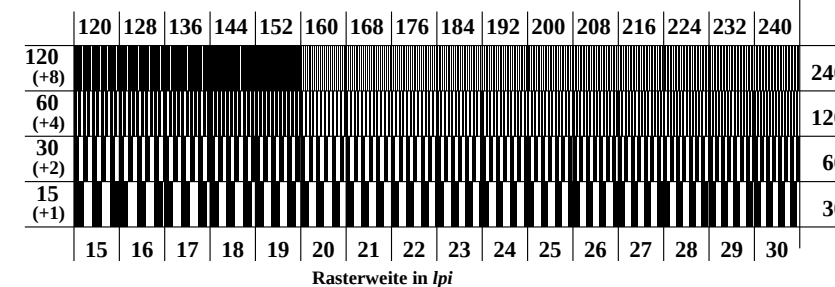

Rasterweite in lpi

MG151-5, Element F: Linienraster unter 90° (oder 0°); PS-Operator: w* setgray

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	5.69	0.0	0.0	0.0	0.0	Kennzeichnung nach
2	11.67	0.0	0.07	11.88	0.0	ISO/IEC 15775:1999 Anhang G
3	17.65	0.0	0.15	19.12	0.0	
4	23.63	0.0	0.22	25.69	0.0	
5	29.62	0.0	0.29	31.9	0.0	
6	35.6	0.0	0.36	37.91	0.0	
7	41.58	0.0	0.42	43.81	0.0	
8	47.56	0.0	0.49	49.64	0.0	
9	53.54	0.0	0.55	55.43	0.0	
10	59.52	0.0	0.62	61.18	0.0	
11	65.5	0.0	0.68	66.92	0.0	
12	71.48	0.0	0.75	72.63	0.0	
13	77.47	0.0	0.81	78.34	0.0	
14	83.45	0.0	0.87	84.04	0.0	
15	89.43	0.0	0.94	89.73	0.0	
16	95.41	0.0	1.0	95.41	0.0	
17	5.69	0.0	0.0	5.69	0.0	
18	28.12	0.0	0.27	30.35	0.0	
19	50.55	0.0	0.52	52.54	0.0	
20	72.98	0.0	0.76	74.06	0.0	
21	95.41	0.0	1.0	95.41	0.0	

Mittlerer Helligkeitsabstand (16 Stufen)
 $\Delta E^*_{CIELAB} = 1.3$

Mittlerer Helligkeitsabstand (5 Stufen)
 $\Delta L^*_{CIELAB} = 1.1$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 94$

MG150-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown


i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Ziel-Ausgabe S2
1	5.69	0.0	0.0	5.69	0.0	Kennzeichnung nach
2	11.67	0.0	0.07	11.67	0.0	ISO/IEC 15775:1999 Anhang G
3	17.65	0.0	0.13	17.65	0.0	
4	23.63	0.0	0.2	23.63	0.0	
5	29.62	0.0	0.27	29.62	0.0	
6	35.6	0.0	0.33	35.6	0.0	
7	41.58	0.0	0.4	41.58	0.0	
8	47.56	0.0	0.47	47.56	0.0	
9	53.54	0.0	0.53	53.54	0.0	
10	59.52	0.0	0.6	59.52	0.0	
11	65.5	0.0	0.67	65.5	0.0	
12	71.48	0.0	0.73	71.48	0.0	
13	77.47	0.0	0.8	77.47	0.0	
14	83.45	0.0	0.87	83.45	0.0	
15	89.43	0.0	0.93	89.43	0.0	
16	95.41	0.0	1.0	95.41	0.0	
17	5.69	0.0	0.0	5.69	0.0	
18	28.12	0.0	0.25	28.12	0.0	
19	50.55	0.0	0.5	50.55	0.0	
20	72.98	0.0	0.75	72.98	0.0	
21	95.41	0.0	1.0	95.41	0.0	

Mittlerer Helligkeitsabstand (16 Stufen)
 $\Delta E^*_{CIELAB} = 0.0$


Mittlerer Helligkeitsabstand (5 Stufen)
 $\Delta L^*_{CIELAB} = 0.0$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 100$

MG151-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

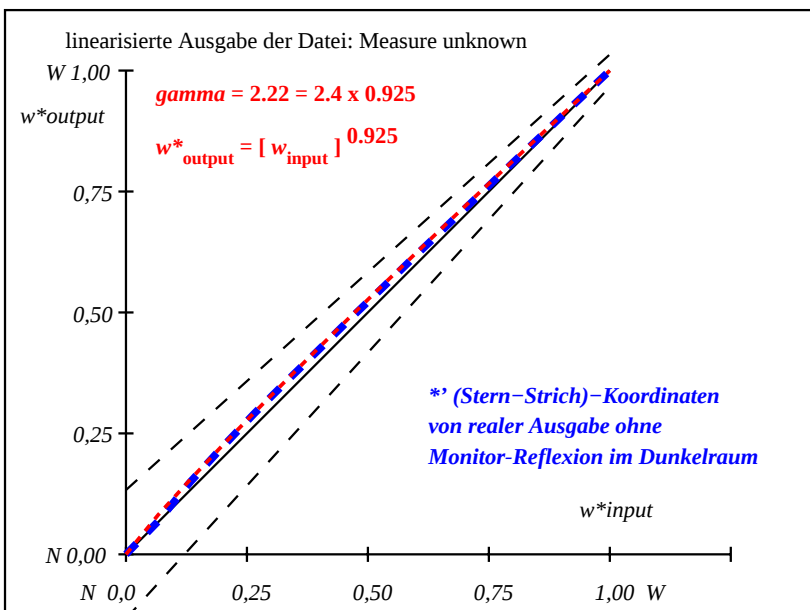


MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

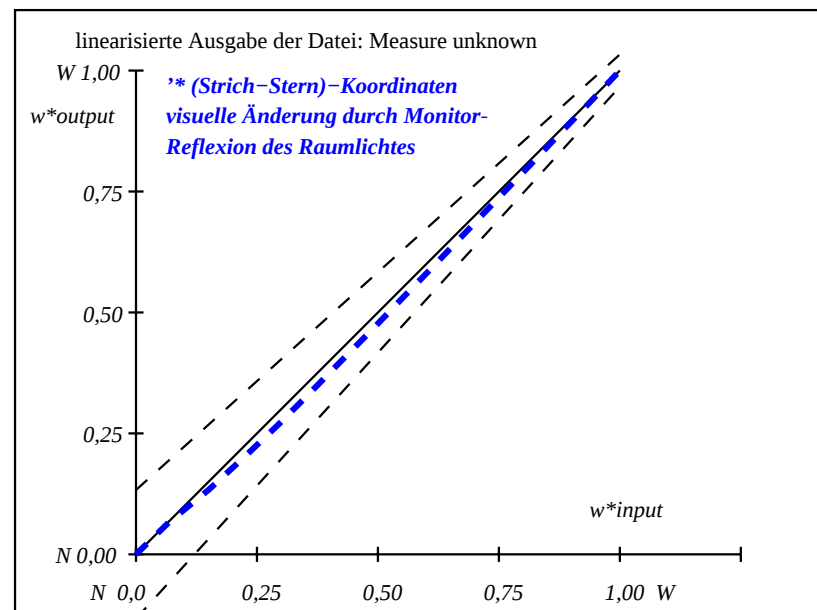


MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown




Radialgitter (Siemensstern) N-W



Radialgitter (Siemensstern) W-N

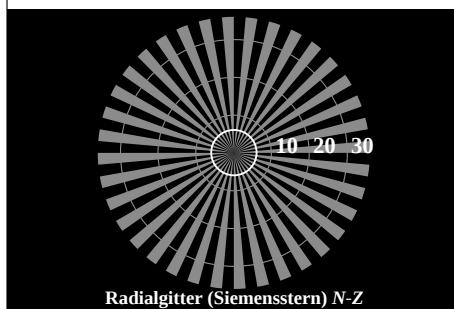


Radialgitter (Siemensstern) N-Z




Radialgitter (Siemensstern) W-Z

MG150-3, Element A: Radialgitter (Siemenssterne) N-W, W-N, N-Z und W-Z; PS-Operator: w* setgray

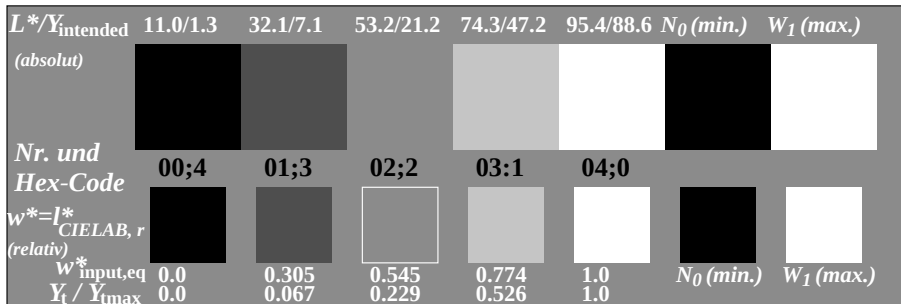

MG150-5, Element B: 5 visuell gleichabständige L^* -Graustufen + N_0 + W_1 ; PS-Operator: w* setgray

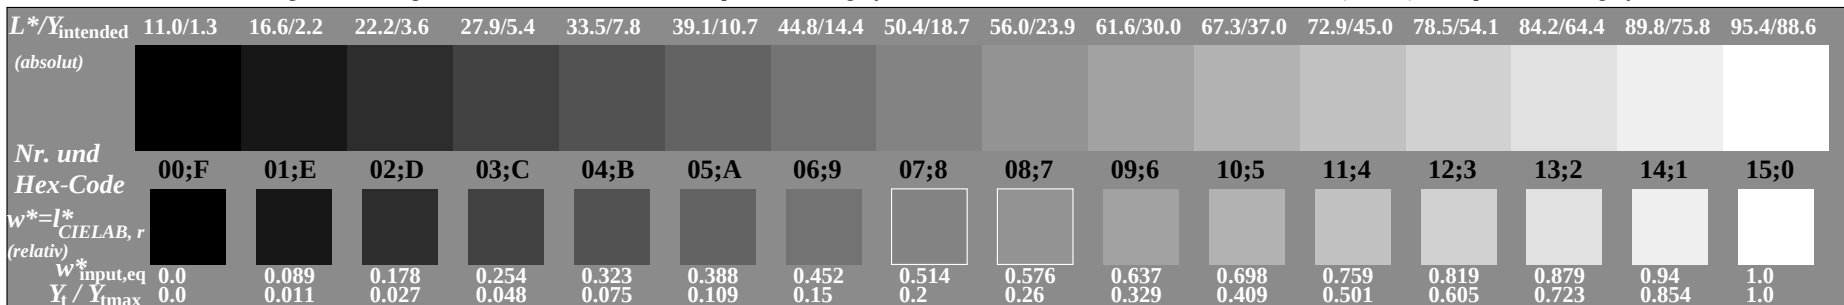

MG150-7, Element C: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: w* setgray




Prüfvorlage MG15 nach ISO 9241-306; Prüfvorlage 3 nach ISO/IEC 15775
Seite 5/16; Erkennbarkeit 16 Graustufen; Kontrastbereich $Y_w:Y_n = 88.6 : 1.3$

Eingabe: w* setgray
Ausgabe: w* setgray




Umfeldstufe Hex-Code	0	7	E	2	8	F
Ringstufe Hex-Code	0-1	7-8	E-F	2-0	8-6	F-D
Landoltringe W-N						Code: Umfeld-Ring

MG151-1, Element D: Landoltringe W-N; PS-Operator: w* setgray

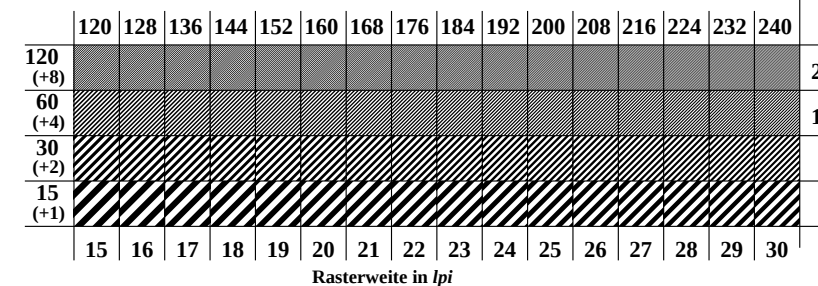

MG151-3, Element E: Linienraster unter 45° (oder 135°); PS-Operator: w* setgray

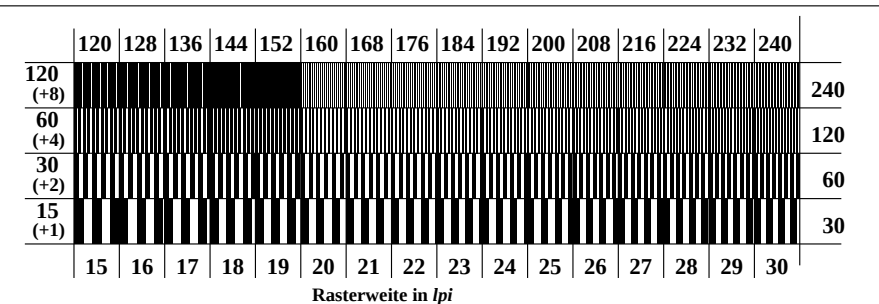


MG151-5, Element F: Linienraster unter 90° (oder 0°); PS-Operator: w* setgray

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	10.99	0.0	0.0	0.0	0.01	Kennzeichnung nach
2	16.62	0.0	0.09	18.51	0.0	ISO/IEC 15775:1999 Anhang G
3	22.25	0.0	0.18	26.04	0.0	
4	27.88	0.0	0.25	32.41	0.0	
5	33.5	0.0	0.32	38.23	0.0	
6	39.13	0.0	0.39	43.76	0.0	
7	44.76	0.0	0.45	49.12	0.0	
8	50.39	0.0	0.51	54.39	0.0	
9	56.02	0.0	0.58	59.6	0.0	
10	61.64	0.0	0.64	64.77	0.0	
11	67.27	0.0	0.7	69.91	0.0	
12	72.9	0.0	0.76	75.03	0.0	
13	78.53	0.0	0.82	80.14	0.0	
14	84.15	0.0	0.88	85.23	0.0	
15	89.78	0.0	0.94	90.32	0.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	95.41	0.0	ΔE*CIELAB = 2.7
17	10.99	0.0	0.0	11.0	0.0	
18	32.1	0.0	0.31	36.77	0.0	
19	53.2	0.0	0.54	57.0	0.0	
20	74.31	0.0	0.77	76.31	0.0	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	95.41	0.0	ΔL*CIELAB = 2.1
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 88	


MG150-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Ziel-Ausgabe S2
1	10.99	0.0	0.0	0.0	0.01	Kennzeichnung nach
2	16.62	0.0	0.07	16.62	0.0	ISO/IEC 15775:1999 Anhang G
3	22.25	0.0	0.13	22.25	0.0	
4	27.88	0.0	0.2	27.88	0.0	
5	33.5	0.0	0.27	33.5	0.0	
6	39.13	0.0	0.33	39.13	0.0	
7	44.76	0.0	0.4	44.76	0.0	
8	50.39	0.0	0.47	50.39	0.0	
9	56.02	0.0	0.53	56.02	0.0	
10	61.64	0.0	0.6	61.64	0.0	
11	67.27	0.0	0.67	67.27	0.0	
12	72.9	0.0	0.73	72.9	0.0	
13	78.53	0.0	0.8	78.53	0.0	
14	84.15	0.0	0.87	84.15	0.0	
15	89.78	0.0	0.93	89.78	0.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	95.41	0.0	ΔE*CIELAB = 0.0
17	10.99	0.0	0.0	10.99	0.0	
18	32.1	0.0	0.25	32.1	0.0	
19	53.2	0.0	0.5	53.2	0.0	
20	74.31	0.0	0.75	74.31	0.0	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	95.41	0.0	ΔL*CIELAB = 0.0
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 100	

MG151-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

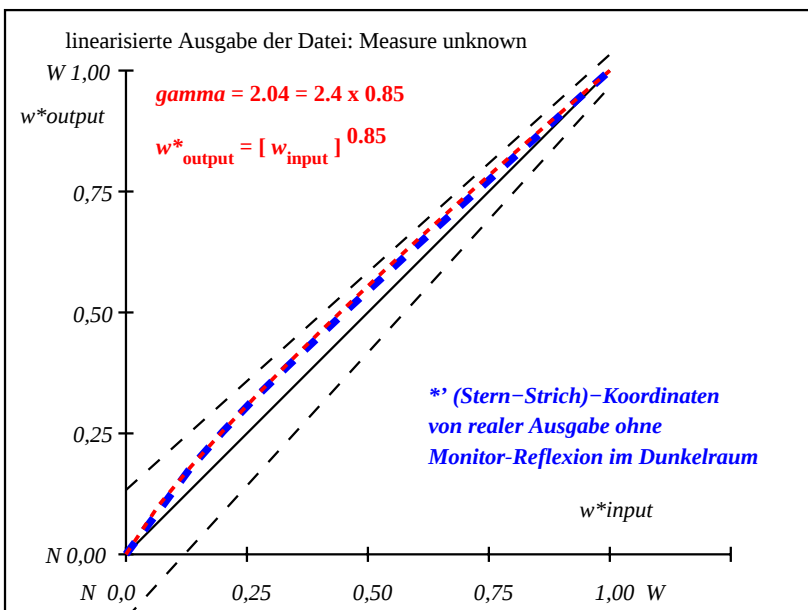

MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

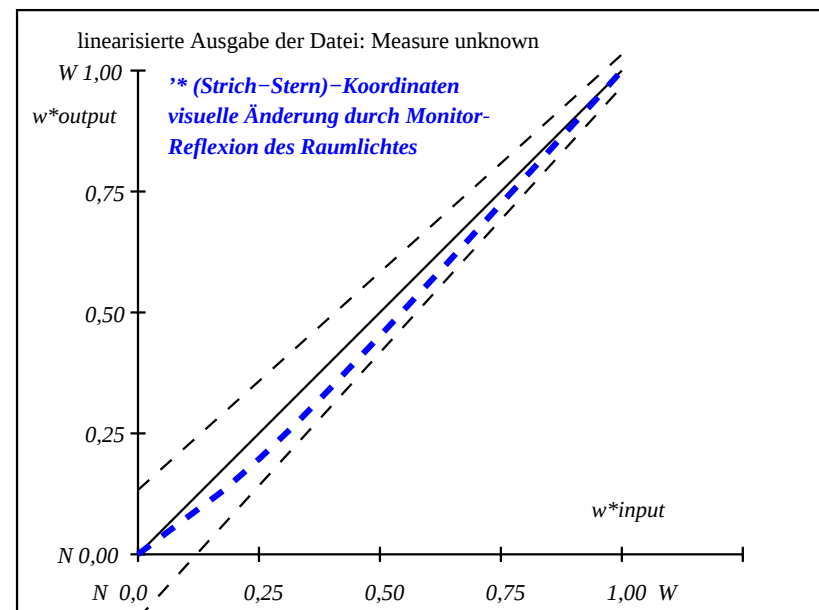


MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	18.01	0.0	0.0	0.01	0.0	Kennzeichnung nach
2	23.17	0.0	0.12	4.21	0.0	ISO/IEC 15775:1999 Anhang G
3	28.33	0.0	0.21	6.27	0.0	
4	33.49	0.0	0.29	6.93	0.0	
5	38.65	0.0	0.36	7.06	0.0	
6	43.81	0.0	0.42	6.87	0.0	
7	48.97	0.0	0.48	6.5	0.0	
8	54.13	0.0	0.54	6.0	0.0	
9	59.29	0.0	0.6	5.43	0.0	
10	64.45	0.0	0.66	4.74	0.0	
11	69.61	0.0	0.72	3.98	0.0	
12	74.77	0.0	0.77	3.2	0.0	
13	79.93	0.0	0.83	2.4	0.0	
14	85.09	0.0	0.89	1.61	0.0	
15	90.25	0.0	0.94	0.8	0.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	0.0	0.01	ΔE*CIELAB = 4.1
17	18.01	0.0	0.0	0.0	0.0	
18	37.36	0.0	0.34	7.02	0.0	
19	56.71	0.0	0.57	5.71	0.0	
20	76.06	0.0	0.79	2.99	0.0	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	0.0	0.01	ΔL*CIELAB = 3.2
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 82	


MG150-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Ziel-Ausgabe S2
1	18.01	0.0	0.0	0.0	0.01	Kennzeichnung nach
2	23.17	0.0	0.07	0.0	0.0	ISO/IEC 15775:1999 Anhang G
3	28.33	0.0	0.13	0.0	0.0	
4	33.49	0.0	0.2	0.0	0.0	
5	38.65	0.0	0.27	0.0	0.0	
6	43.81	0.0	0.33	0.0	0.0	
7	48.97	0.0	0.4	0.0	0.0	
8	54.13	0.0	0.47	0.0	0.0	
9	59.29	0.0	0.53	0.0	0.0	
10	64.45	0.0	0.6	0.0	0.0	
11	69.61	0.0	0.67	0.0	0.0	
12	74.77	0.0	0.73	0.0	0.0	
13	79.93	0.0	0.8	0.0	0.0	
14	85.09	0.0	0.87	0.0	0.0	
15	90.25	0.0	0.93	0.0	0.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	0.0	0.01	ΔE*CIELAB = 0.0
17	18.01	0.0	0.0	0.0	0.0	
18	37.36	0.0	0.25	0.0	0.0	
19	56.71	0.0	0.5	0.0	0.0	
20	76.06	0.0	0.75	0.0	0.0	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	0.0	0.01	ΔL*CIELAB = 0.0
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 100	

MG151-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

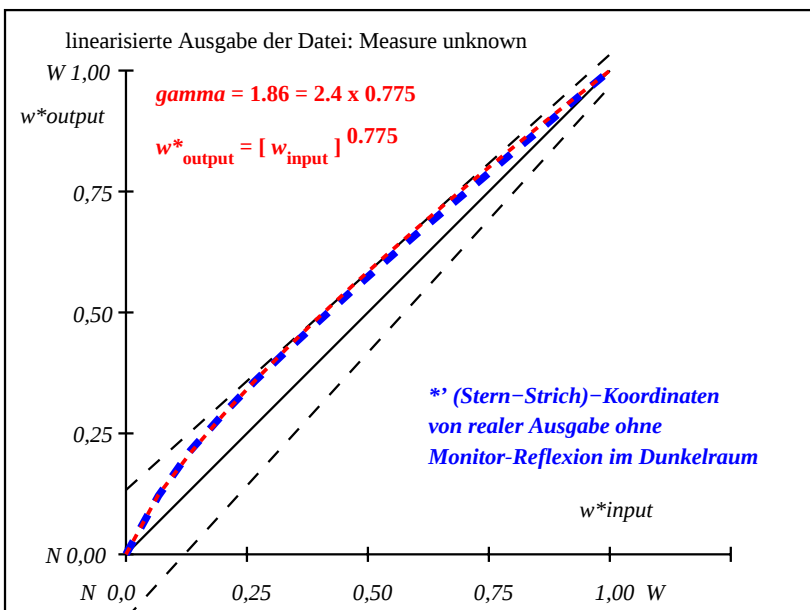

MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

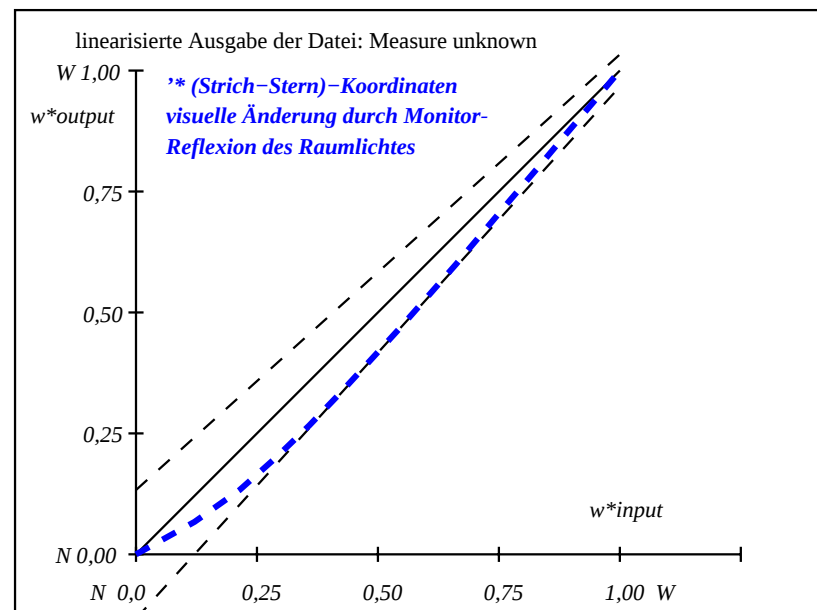


MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	26.85	0.0	0.0	0.01	0.0	Kennzeichnung nach
2	31.42	0.0	0.15	5.97	0.0	ISO/IEC 15775:1999 Anhang G
3	35.99	0.0	0.25	8.23	0.0	
4	40.56	0.0	0.33	9.05	0.0	
5	45.13	0.0	0.4	9.13	0.0	
6	49.7	0.0	0.46	8.82	0.0	
7	54.27	0.0	0.52	8.28	0.0	
8	58.84	0.0	0.58	7.59	0.0	
9	63.41	0.0	0.63	6.81	0.0	
10	67.99	0.0	0.69	5.98	0.0	
11	72.56	0.0	0.74	5.1	0.0	
12	77.13	0.0	0.79	4.15	0.0	
13	81.7	0.0	0.85	3.11	0.0	
14	86.27	0.0	0.9	2.07	0.0	
15	90.84	0.0	0.95	1.03	0.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	0.0	0.01	ΔE*CIELAB = 5.3
17	26.85	0.0	0.0	0.0	0.0	
18	43.99	0.0	0.38	9.11	0.0	
19	61.13	0.0	0.6	7.2	0.0	
20	78.27	0.0	0.81	3.88	0.0	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	0.0	0.01	ΔL*CIELAB = 4.0
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 77	


MG150-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Ziel-Ausgabe S2
1	26.85	0.0	0.0	0.0	0.0	Kennzeichnung nach
2	31.42	0.0	0.07	0.0	0.0	ISO/IEC 15775:1999 Anhang G
3	35.99	0.0	0.13	0.0	0.0	
4	40.56	0.0	0.2	0.0	0.0	
5	45.13	0.0	0.27	0.0	0.0	
6	49.7	0.0	0.33	0.0	0.0	
7	54.27	0.0	0.4	0.0	0.0	
8	58.84	0.0	0.47	0.0	0.0	
9	63.41	0.0	0.53	0.0	0.0	
10	67.99	0.0	0.6	0.0	0.0	
11	72.56	0.0	0.67	0.0	0.0	
12	77.13	0.0	0.73	0.0	0.0	
13	81.7	0.0	0.8	0.0	0.0	
14	86.27	0.0	0.87	0.0	0.0	
15	90.84	0.0	0.93	0.0	0.0	Mittlerer Helligkeitsabstand (16 Stufen)
16	95.41	0.0	1.0	0.0	0.01	ΔE*CIELAB = 0.0
17	26.85	0.0	0.0	0.0	0.0	
18	43.99	0.0	0.25	0.0	0.0	
19	61.13	0.0	0.5	0.0	0.0	
20	78.27	0.0	0.75	0.0	0.0	Mittlerer Helligkeitsabstand (5 Stufen)
21	95.41	0.0	1.0	0.0	0.01	ΔL*CIELAB = 0.0
Mittlerer Farbwiedergabe-Index:					R* _{ab,m} = 100	


MG151-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

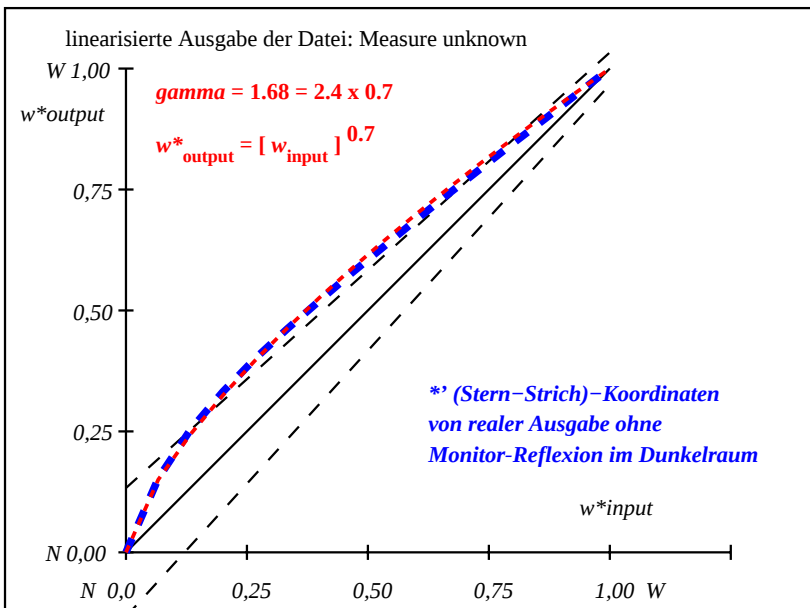


MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

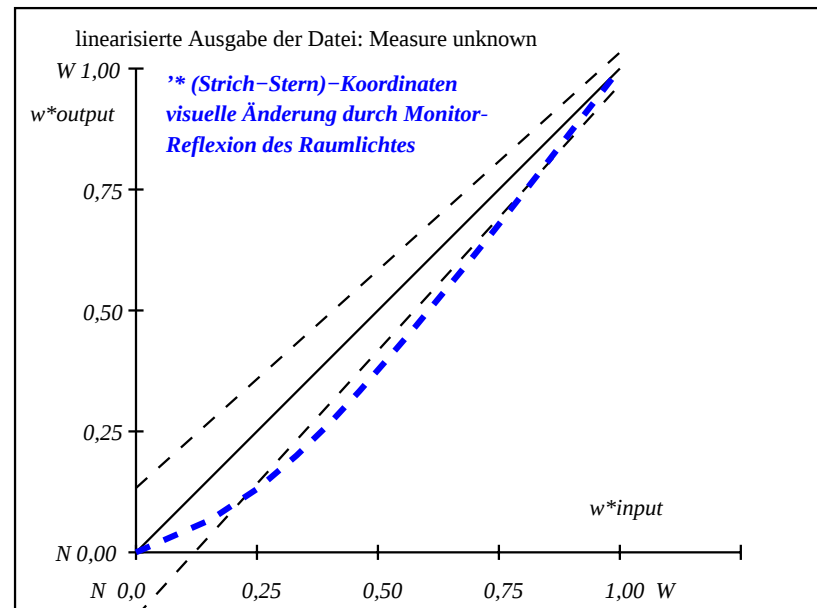


MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

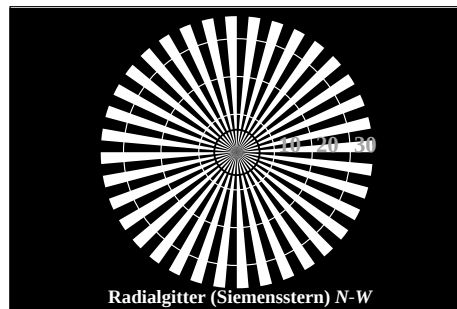


Radialgitter (Siemensstern) N-W



Radialgitter (Siemensstern) W-N

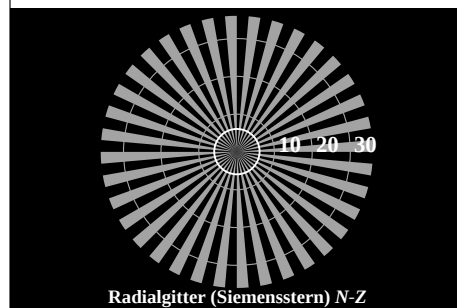


Radialgitter (Siemensstern) N-Z




Radialgitter (Siemensstern) W-Z

MG150-3, Element A: Radialgitter (Siemenssterne) N-W, W-N, N-Z und W-Z; PS-Operator: w* setgray

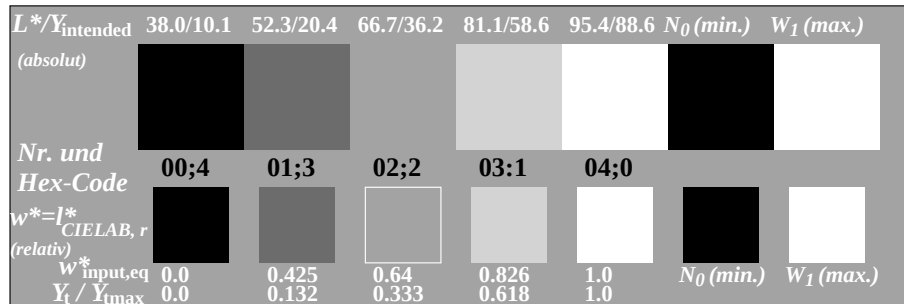


MG150-5, Element B: 5 visuell gleichabständige L^* -Graustufen + N_0 + W_1 ; PS-Operator: w* setgray

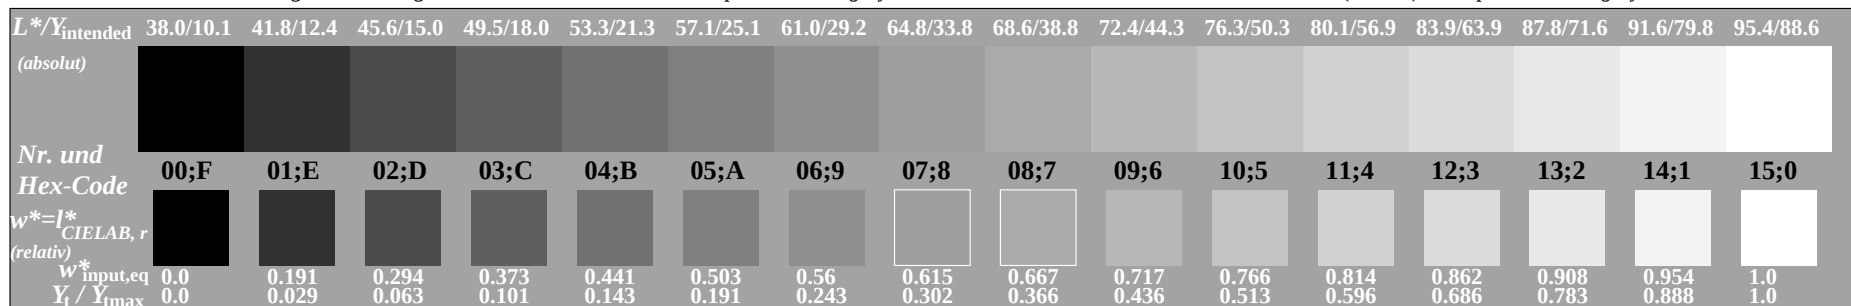


MG150-7, Element C: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: w* setgray

Umfeldstufe	0									1	Ringstufe	0-1
Hex-Code											Hex-Code	
7										8		7-8
E										F		E-F
2										0		2-0
8										6		8-6
F										D		F-D
Landoltringe W-N										Code: Umfeld-Ring		

MG151-1, Element D: Landoltringe W-N; PS-Operator: w* setgray

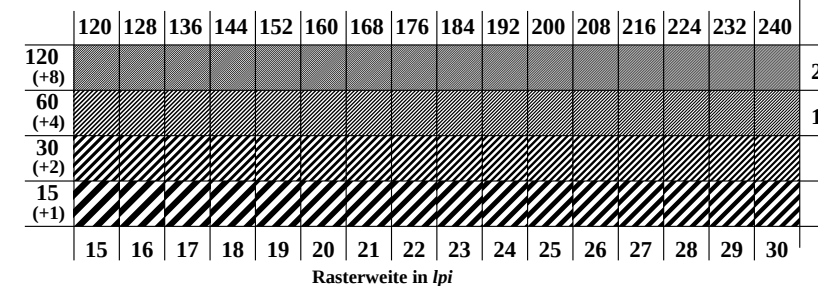

MG151-3, Element E: Linienraster unter 45° (oder 135°); PS-Operator: w* setgray

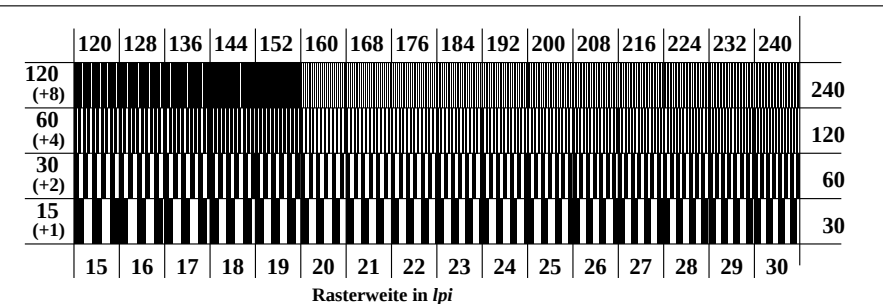

MG151-5, Element F: Linienraster unter 90° (oder 0°); PS-Operator: w* setgray

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	37.99	0.0	0.0	37.99	0.0	0.0
2	41.81	0.0	0.19	48.95	0.0	0.0
3	45.64	0.0	0.29	54.87	0.0	0.0
4	49.47	0.0	0.37	59.43	0.0	0.0
5	53.3	0.0	0.44	63.34	0.0	0.0
6	57.13	0.0	0.5	66.86	0.0	0.0
7	60.96	0.0	0.56	70.14	0.0	0.0
8	64.78	0.0	0.61	73.28	0.0	0.0
9	68.61	0.0	0.67	76.31	0.0	0.0
10	72.44	0.0	0.72	79.15	0.0	0.0
11	76.27	0.0	0.77	81.95	0.0	0.0
12	80.1	0.0	0.81	84.73	0.0	0.0
13	83.93	0.0	0.86	87.47	0.0	0.0
14	87.75	0.0	0.91	90.1	0.0	0.0
15	91.58	0.0	0.95	92.75	0.0	0.0
16	95.41	0.0	1.0	95.41	0.0	0.0
17	37.99	0.0	0.0	37.99	0.0	0.0
18	52.34	0.0	0.42	62.36	0.0	0.0
19	66.7	0.0	0.64	74.79	0.0	0.0
20	81.05	0.0	0.83	85.42	0.0	0.0
21	95.41	0.0	1.0	95.41	0.0	0.0

Kennzeichnung nach ISO/IEC 15775:1999 Anhang G

Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 6.0$

Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 4.5$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 74$

MG150-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Ziel-Ausgabe S2
1	37.99	0.0	0.0	37.99	0.0	0.0
2	41.81	0.0	0.07	41.81	0.0	0.0
3	45.64	0.0	0.13	45.64	0.0	0.0
4	49.47	0.0	0.2	49.47	0.0	0.0
5	53.3	0.0	0.27	53.3	0.0	0.0
6	57.13	0.0	0.33	57.13	0.0	0.0
7	60.96	0.0	0.4	60.96	0.0	0.0
8	64.78	0.0	0.47	64.78	0.0	0.0
9	68.61	0.0	0.53	68.61	0.0	0.0
10	72.44	0.0	0.6	72.44	0.0	0.0
11	76.27	0.0	0.67	76.27	0.0	0.0
12	80.1	0.0	0.73	80.1	0.0	0.0
13	83.93	0.0	0.8	83.93	0.0	0.0
14	87.75	0.0	0.87	87.75	0.0	0.0
15	91.58	0.0	0.93	91.58	0.0	0.0
16	95.41	0.0	1.0	95.41	0.0	0.0
17	37.99	0.0	0.0	37.99	0.0	0.0
18	52.34	0.0	0.25	52.34	0.0	0.0
19	66.7	0.0	0.5	66.7	0.0	0.0
20	81.05	0.0	0.75	81.05	0.0	0.0
21	95.41	0.0	1.0	95.41	0.0	0.0


Kennzeichnung nach ISO/IEC 15775:1999 Anhang G

Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 0.0$


Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 0.0$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 100$

MG151-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

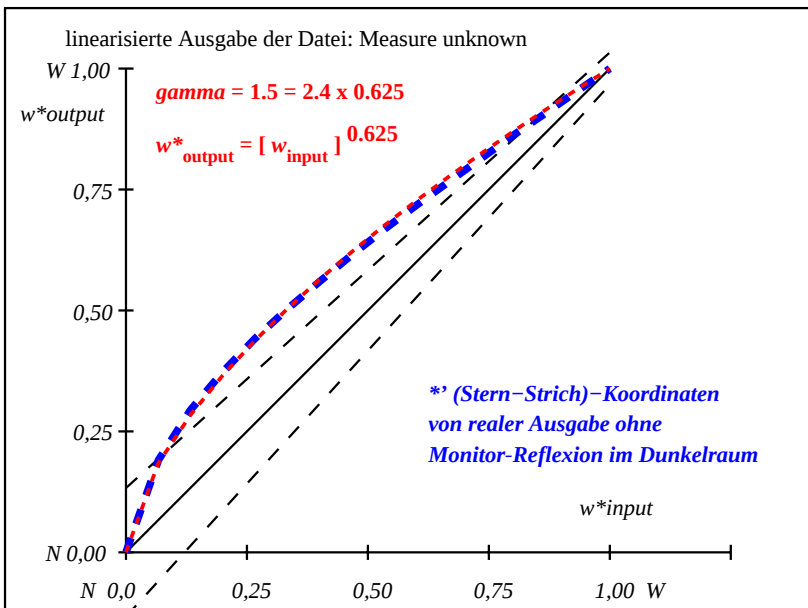

MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

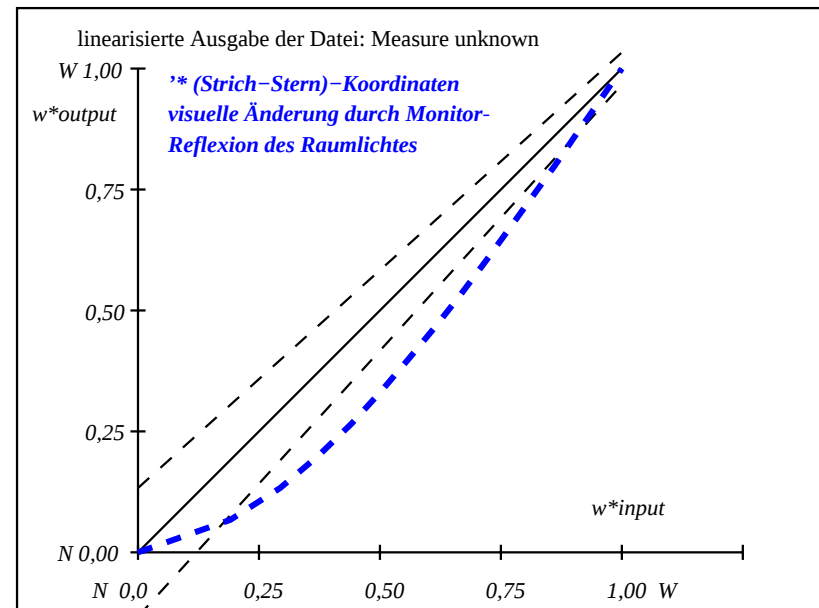

MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown



Radialgitter (Siemensstern) N-W

Radialgitter (Siemensstern) W-N

Radialgitter (Siemensstern) N-Z


Radialgitter (Siemensstern) W-Z

MG150-3, Element A: Radialgitter (Siemenssterne) N-W, W-N, N-Z und W-Z; PS-Operator: w* setgray

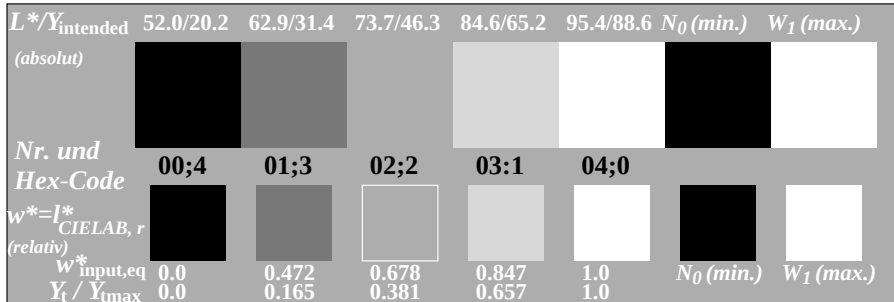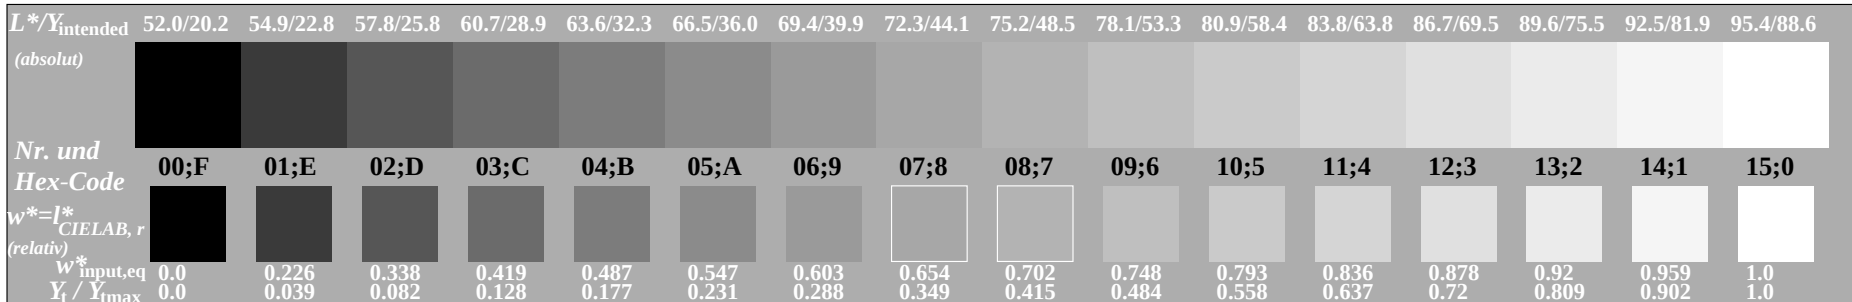
MG150-5, Element B: 5 visuell gleichabständige L^* -Graustufen + N_0 + W_1 ; PS-Operator: w* setgrayMG150-7, Element C: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: w* setgray

Umfeldstufe Hex-Code	0	7	E	2	8	F
Ringstufe Hex-Code	0-1	7-8	E-F	2-0	8-6	F-D
Landoltringe W-N						Code: Umfeld-Ring

MG151-1, Element D: Landoltringe W-N; PS-Operator: w* setgray

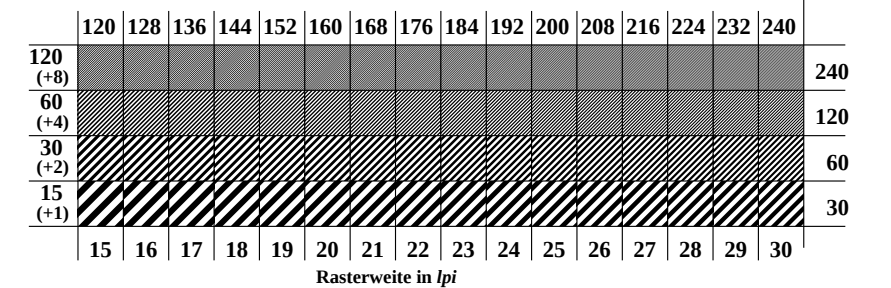

MG151-3, Element E: Linienraster unter 45° (oder 135°); PS-Operator: w* setgray

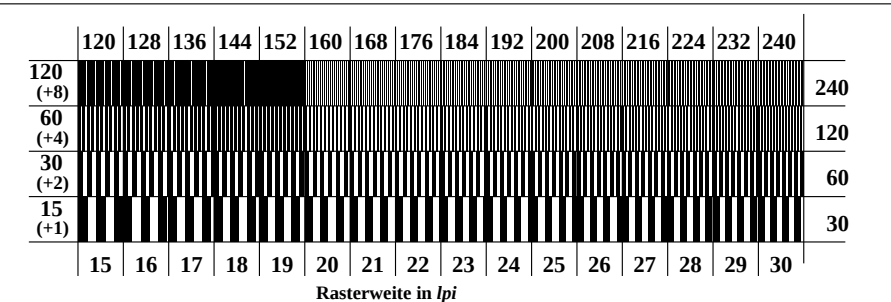

MG151-5, Element F: Linienraster unter 90° (oder 0°); PS-Operator: w* setgray

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	52.02	0.0	0.0	52.02	0.0	0.0
2	54.91	0.0	0.23	61.84	0.0	0.0
3	57.8	0.0	0.34	66.7	0.0	0.0
4	60.7	0.0	0.42	70.19	0.0	0.0
5	63.59	0.0	0.49	73.15	0.0	0.0
6	66.48	0.0	0.55	75.77	0.0	0.0
7	69.37	0.0	0.6	78.19	0.0	0.0
8	72.27	0.0	0.65	80.39	0.0	0.0
9	75.16	0.0	0.7	82.47	0.0	0.0
10	78.05	0.0	0.75	84.49	0.0	0.0
11	80.95	0.0	0.79	86.45	0.0	0.0
12	83.84	0.0	0.84	88.29	0.0	0.0
13	86.73	0.0	0.88	90.14	0.0	0.0
14	89.62	0.0	0.92	91.92	0.0	0.0
15	92.52	0.0	0.96	93.65	0.0	0.0
16	95.41	0.0	1.0	95.41	0.0	0.0
17	52.02	0.0	0.0	52.02	0.0	0.0
18	62.87	0.0	0.47	72.41	0.0	0.0
19	73.71	0.0	0.68	81.43	0.0	0.0
20	84.56	0.0	0.85	88.75	0.0	0.0
21	95.41	0.0	1.0	95.41	0.0	0.0

Kennzeichnung nach ISO/IEC 15775:1999 Anhang G

Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 5.7$

Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 4.3$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 75$

MG150-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	l*out	LAB*out	LAB*out/c-ref	ΔE*	Ziel-Ausgabe S2
1	52.02	0.0	0.0	52.02	0.0	0.0
2	54.91	0.0	0.07	54.91	0.0	0.0
3	57.8	0.0	0.13	57.8	0.0	0.0
4	60.7	0.0	0.2	60.7	0.0	0.0
5	63.59	0.0	0.27	63.59	0.0	0.0
6	66.48	0.0	0.33	66.48	0.0	0.0
7	69.37	0.0	0.4	69.37	0.0	0.0
8	72.27	0.0	0.47	72.27	0.0	0.0
9	75.16	0.0	0.53	75.16	0.0	0.0
10	78.05	0.0	0.6	78.05	0.0	0.0
11	80.95	0.0	0.67	80.95	0.0	0.0
12	83.84	0.0	0.73	83.84	0.0	0.0
13	86.73	0.0	0.8	86.73	0.0	0.0
14	89.62	0.0	0.87	89.62	0.0	0.0
15	92.52	0.0	0.93	92.52	0.0	0.0
16	95.41	0.0	1.0	95.41	0.0	0.0
17	52.02	0.0	0.0	52.02	0.0	0.0
18	62.87	0.0	0.25	62.87	0.0	0.0
19	73.71	0.0	0.5	73.71	0.0	0.0
20	84.56	0.0	0.75	84.56	0.0	0.0
21	95.41	0.0	1.0	95.41	0.0	0.0


Kennzeichnung nach ISO/IEC 15775:1999 Anhang G

Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 0.0$


Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 0.0$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 100$

MG151-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

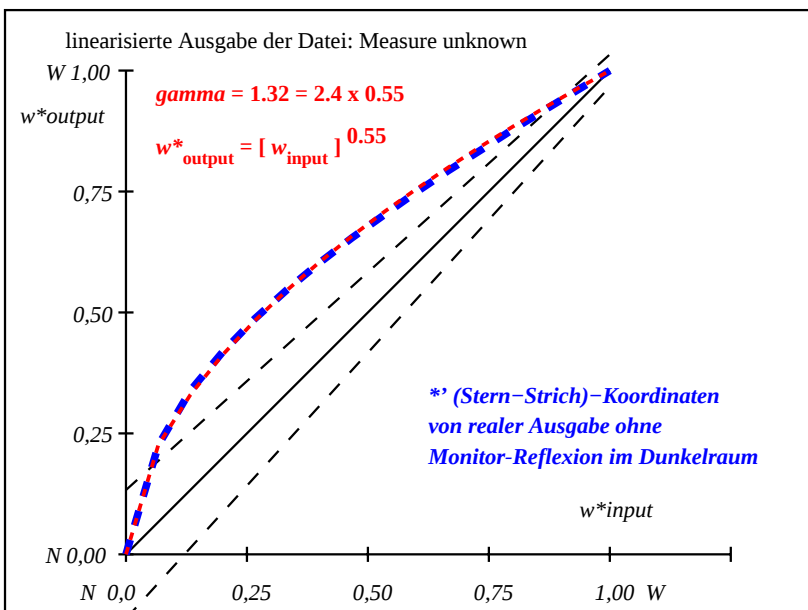

MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

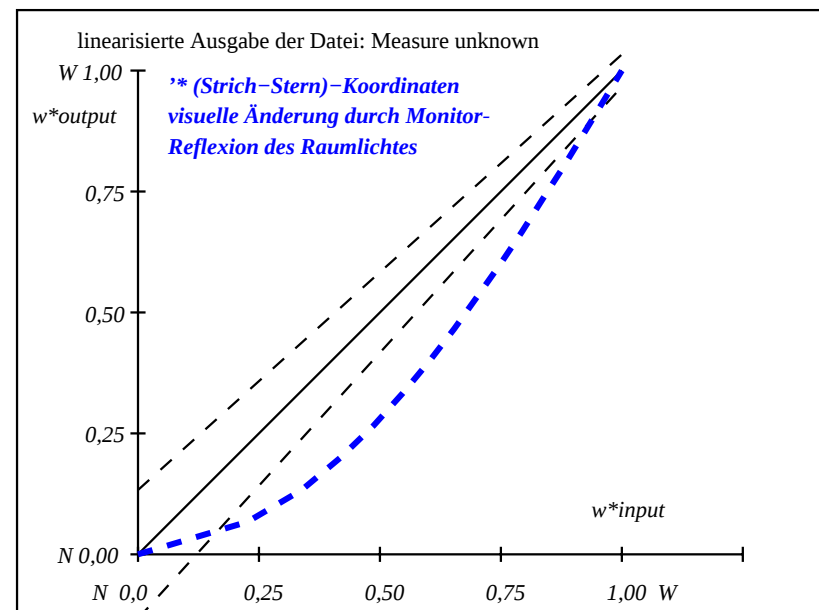

MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown



Radialgitter (Siemensstern) N-W

Radialgitter (Siemensstern) W-N

Radialgitter (Siemensstern) N-Z


Radialgitter (Siemensstern) W-Z

MG150-3, Element A: Radialgitter (Siemenssterne) N-W, W-N, N-Z und W-Z; PS-Operator: w* setgray

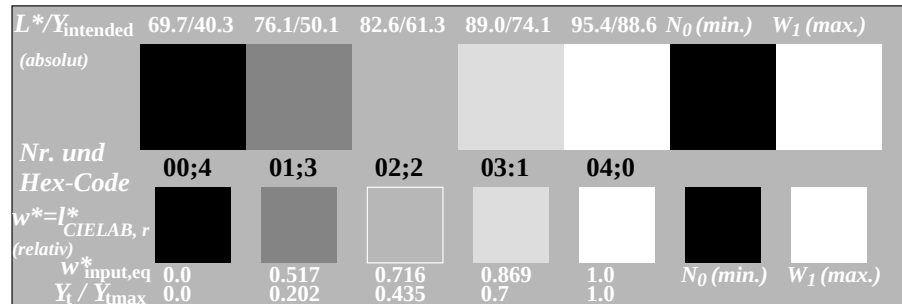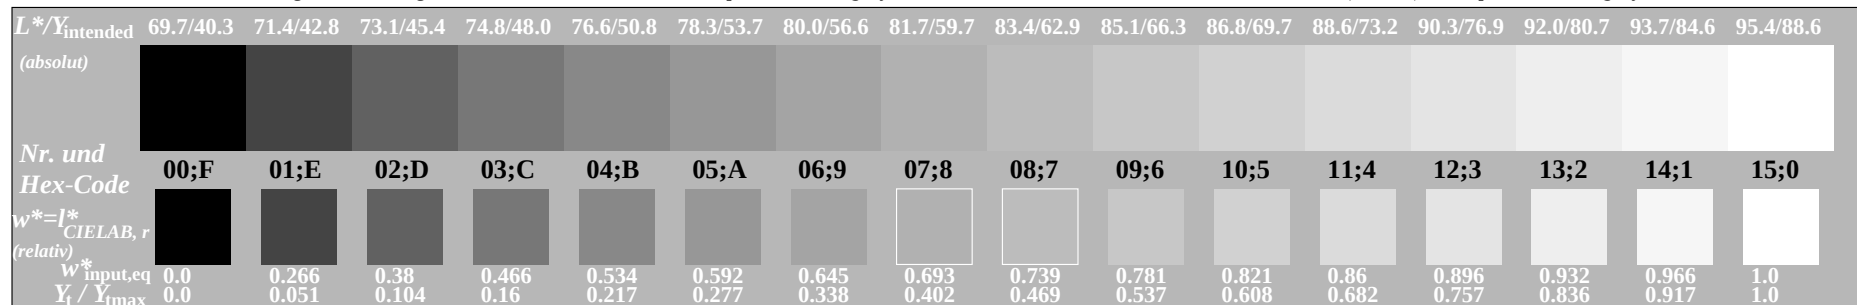
MG150-5, Element B: 5 visuell gleichabständige L^* -Graustufen + N_0 + W_1 ; PS-Operator: w* setgrayMG150-7, Element C: 16 visuell gleichabständige L^* -Graustufen; PS-Operator: w* setgray

Umfeldstufe Hex-Code	0	7	E	2	8	F
Ringstufe Hex-Code	0-1	7-8	E-F	2-0	8-6	F-D
Landoltringe W-N						Code: Umfeld-Ring

MG151-1, Element D: Landoltringe W-N; PS-Operator: w* setgray

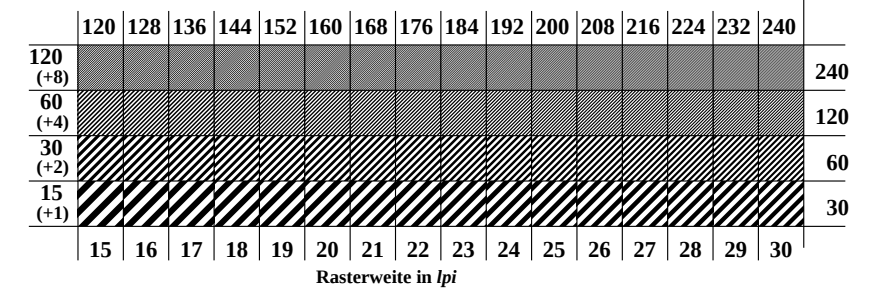

MG151-3, Element E: Linienraster unter 45° (oder 135°); PS-Operator: w* setgray

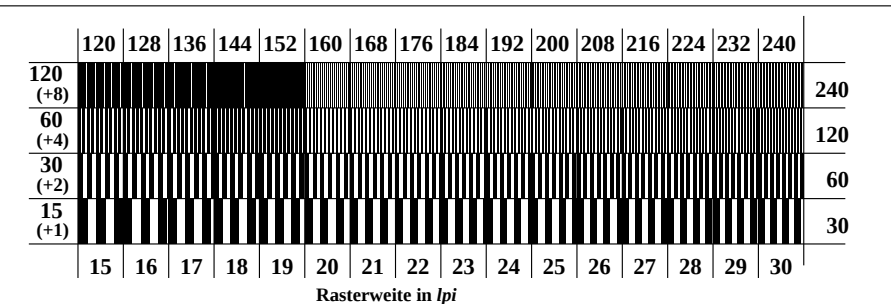

MG151-5, Element F: Linienraster unter 90° (oder 0°); PS-Operator: w* setgray

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Start-Ausgabe S1
1	69.7	0.0	0.0	69.7	0.0	0.0
2	71.41	0.0	0.27	76.52	0.0	0.0
3	73.13	0.0	0.38	79.48	0.0	0.0
4	74.84	0.0	0.47	81.67	0.0	0.0
5	76.55	0.0	0.53	83.43	0.0	0.0
6	78.27	0.0	0.59	84.93	0.0	0.0
7	79.98	0.0	0.64	86.27	0.0	0.0
8	81.7	0.0	0.69	87.52	0.0	0.0
9	83.41	0.0	0.74	88.7	0.0	0.0
10	85.12	0.0	0.78	89.77	0.0	0.0
11	86.84	0.0	0.82	90.8	0.0	0.0
12	88.55	0.0	0.86	91.8	0.0	0.0
13	90.27	0.0	0.9	92.73	0.0	0.0
14	91.98	0.0	0.93	93.66	0.0	0.0
15	93.7	0.0	0.97	94.53	0.0	0.0
16	95.41	0.0	1.0	95.41	0.0	0.0
17	69.7	0.0	0.0	69.7	0.0	0.0
18	76.13	0.0	0.52	82.99	0.0	0.0
19	82.55	0.0	0.72	88.11	0.0	0.0
20	88.98	0.0	0.87	92.03	0.0	0.0
21	95.41	0.0	1.0	95.41	0.0	0.0

Kennzeichnung nach ISO/IEC 15775:1999 Anhang G

Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 4.1$

Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 3.1$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 82$

MG150-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

i	LAB*ref	L*out	LAB*out	LAB*out/c-ref	ΔE*	Ziel-Ausgabe S2
1	69.7	0.0	0.0	69.7	0.0	0.0
2	71.41	0.0	0.07	71.41	0.0	0.0
3	73.13	0.0	0.13	73.13	0.0	0.0
4	74.84	0.0	0.2	74.84	0.0	0.0
5	76.55	0.0	0.27	76.55	0.0	0.0
6	78.27	0.0	0.33	78.27	0.0	0.0
7	79.98	0.0	0.4	79.98	0.0	0.0
8	81.7	0.0	0.47	81.7	0.0	0.0
9	83.41	0.0	0.53	83.41	0.0	0.0
10	85.12	0.0	0.6	85.12	0.0	0.0
11	86.84	0.0	0.67	86.84	0.0	0.0
12	88.55	0.0	0.73	88.55	0.0	0.0
13	90.27	0.0	0.8	90.27	0.0	0.0
14	91.98	0.0	0.87	91.98	0.0	0.0
15	93.7	0.0	0.93	93.7	0.0	0.0
16	95.41	0.0	1.0	95.41	0.0	0.0
17	69.7	0.0	0.0	69.7	0.0	0.0
18	76.13	0.0	0.25	76.13	0.0	0.0
19	82.55	0.0	0.5	82.55	0.0	0.0
20	88.98	0.0	0.75	88.98	0.0	0.0
21	95.41	0.0	1.0	95.41	0.0	0.0


Kennzeichnung nach ISO/IEC 15775:1999 Anhang G

Mittlerer Helligkeitsabstand (16 Stufen) $\Delta E^*_{CIELAB} = 0.0$


Mittlerer Helligkeitsabstand (5 Stufen) $\Delta L^*_{CIELAB} = 0.0$

Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 100$

MG151-3, Meas.: Measure unknown; Device: Device unknown; Date: Date unknown

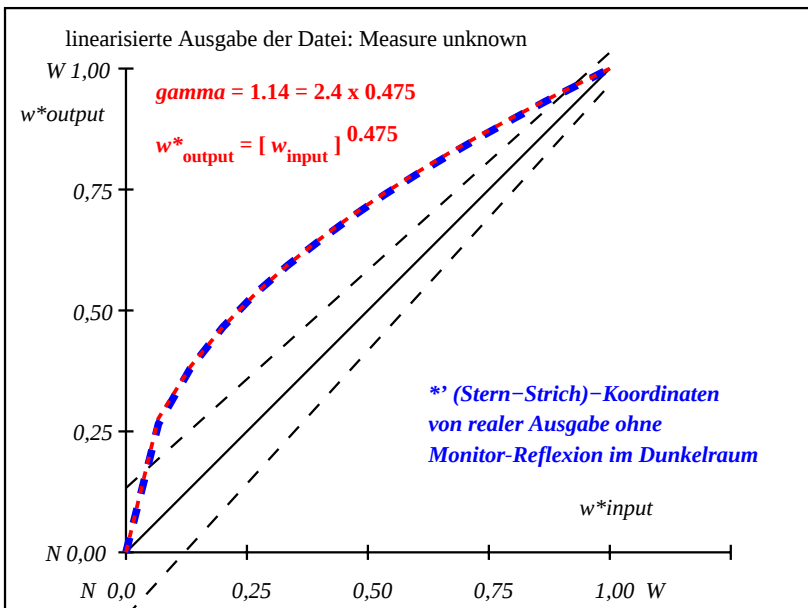

MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown

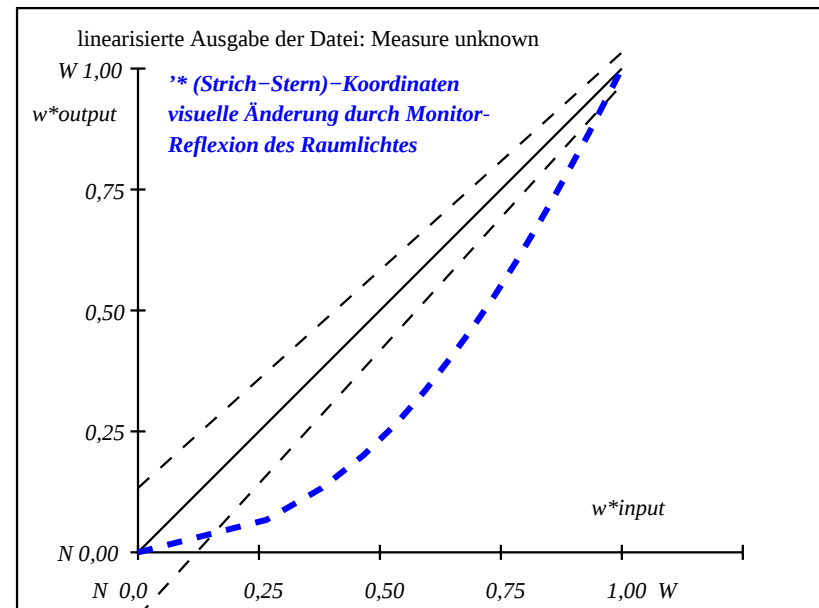

MG150-7, File: Measure unknown; Device: Device unknown; Date: Date unknown