


Input: Colorimetric Reflective System NCS11
for hue $h^* = lab^*h = 24/360 = 0.066$
 lab^*tch and lab^*nch


D65: hue R
LCH*Ma: 47 92 24
rgb*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut
 $u^*_{rel} = 149$
%Regularity
 $g^*_{H,rel} = 46$
 $g^*_{C,rel} = 65$

NCS11; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
RMa	47.15	84.64	37.25	92.48	24
JMa	91.37	-1.27	125.03	125.03	91
GMa	63.07	-114.28	25.35	117.06	167
G50BMa	59.47	-80.6	-33.45	87.28	203
BMa	49.01	3.65	-81.19	81.28	273
B50RMa	44.06	106.09	-73.93	129.32	325
NMa	10.99	0.0	0.0	0.0	0
WMa	95.41	0.0	0.0	0.0	0
RClE	39.92	58.69	27.98	65.01	25
JClE	81.26	-2.9	71.56	71.62	92
GClE	52.23	-42.45	13.59	44.59	162
BClE	30.57	1.35	-46.48	46.51	272

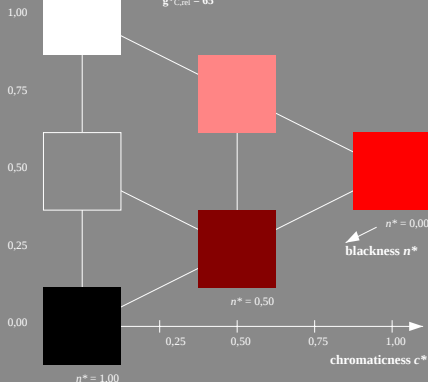


TE680-7, 3 step scales for constant CIELAB hue 24/360 = 0.066 (left)

BAM-test chart TE68; Colorimetric systems NCS11a & MRS18
D65: 3 and 5 step colour scales for 10 hues

Output: Colorimetric Reflective System MRS18
for hue $h^* = lab^*h = 30/360 = 0.083$
 lab^*tch and lab^*nch


D65: hue R
LCH*Ma: 50 77 30
rgb*Ma: 1.0 0.0 0.0

triangle lightness t^*



%Gamut
 $u^*_{rel} = 91$
%Regularity
 $g^*_{H,rel} = 41$
 $g^*_{C,rel} = 52$

MRS18; adapted (a) CIELAB data					
	$L^*=L^*_a$	a^*_a	b^*_a	$C^*_{ab,a}$	$h^*_{ab,a}$
RMa	49.63	66.96	38.37	77.18	30
JMa	90.7	-6.36	88.75	88.98	94
GMa	52.11	-69.73	9.44	70.37	172
G50BMa	45.03	-36.57	-28.47	46.36	218
BMa	36.65	23.19	-63.05	67.18	290
B50RMa	34.94	57.17	-44.26	72.31	322
NMa	18.01	0.0	0.0	0.0	0
WMa	95.41	0.0	0.0	0.0	0
RClE	39.92	58.66	26.98	64.56	25
JClE	81.26	-2.17	67.76	67.79	92
GClE	52.23	-42.26	11.75	43.87	164
BClE	30.57	1.15	-46.84	46.87	271

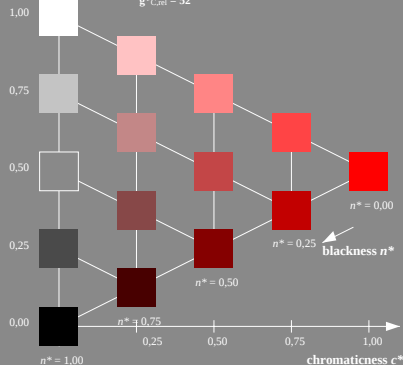

5 step scales for constant CIELAB hue 30/360 = 0.083 (right)

BAM material: code=ha4a
application for evaluation and measurement of printer or monitor systems, Y=2.5, XYZ
T/168 From T/10 Series 1/L Page 1 Page count: 1