






input: 000n / w / nnn0 / www set...
output: no change compared to input



Version 2.1, io=1,1



BAM-test chart XE26; Colorimetric systems, Page 2/9
5 and 16 step device colour scales; standard colours


C

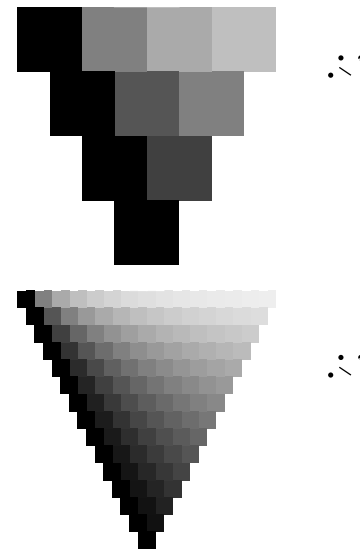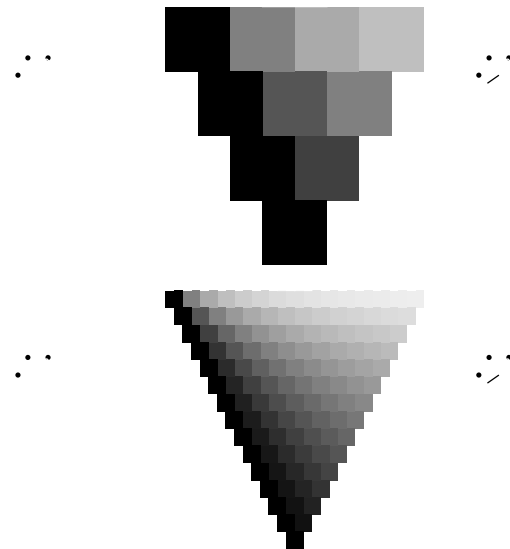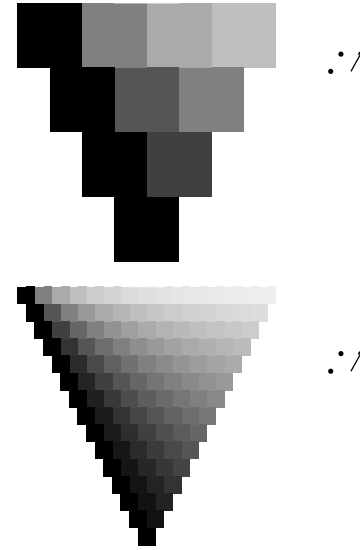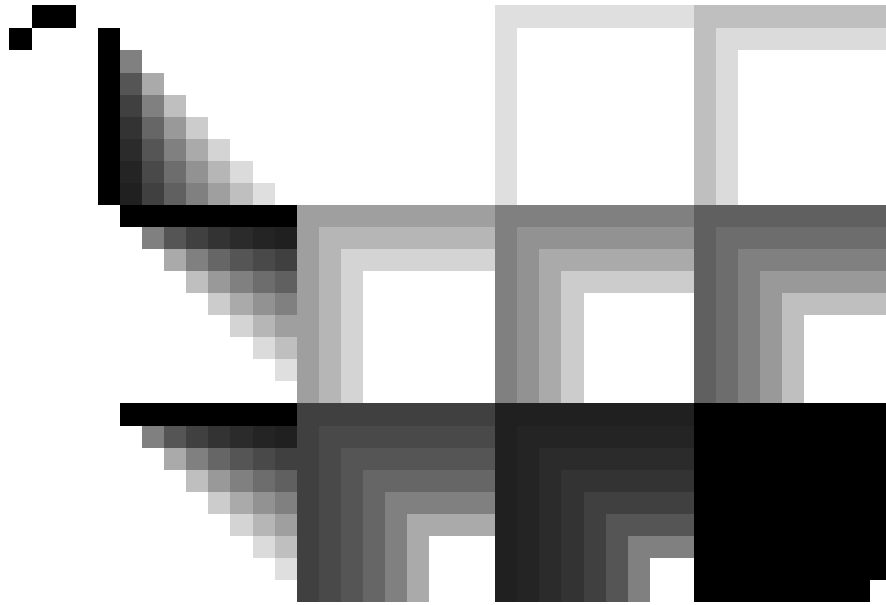

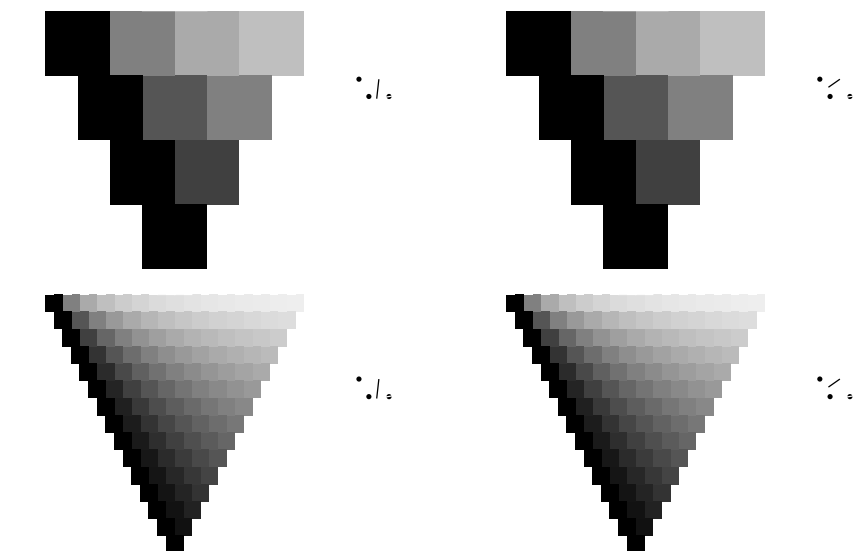
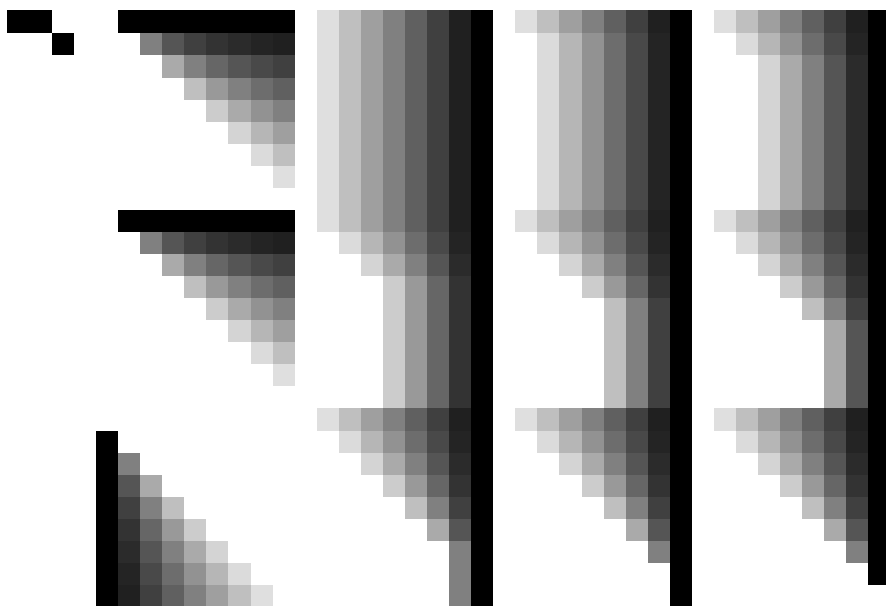


XE260-7N; 6 device hues (left), 4 elementary hues (right), and standard colour data: *cmym4**, page: 4; separation: M


m

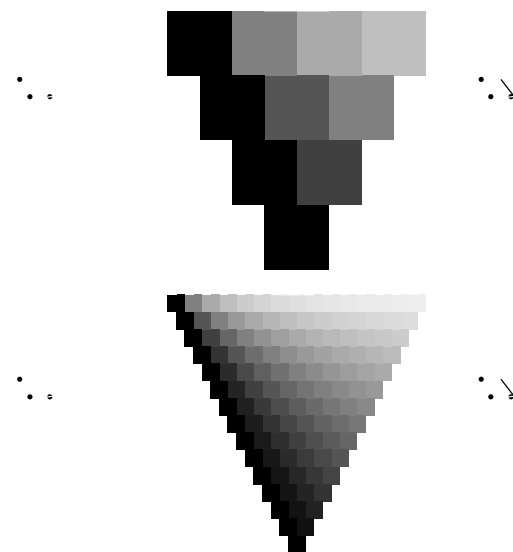

y

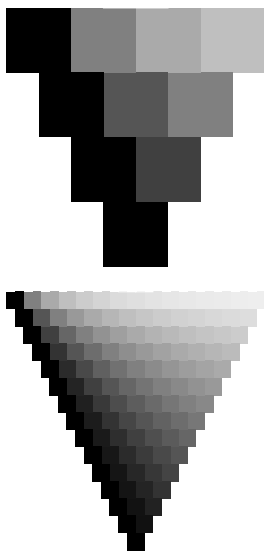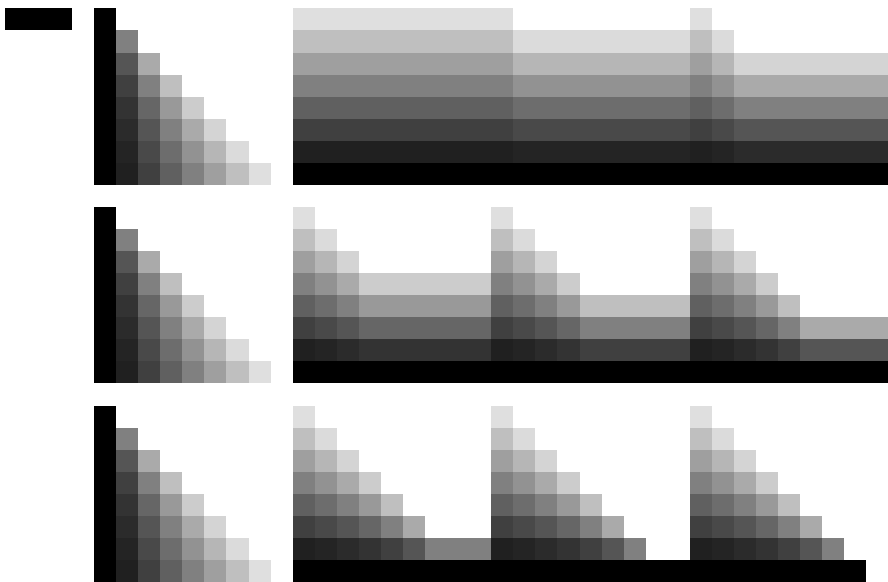

1/2

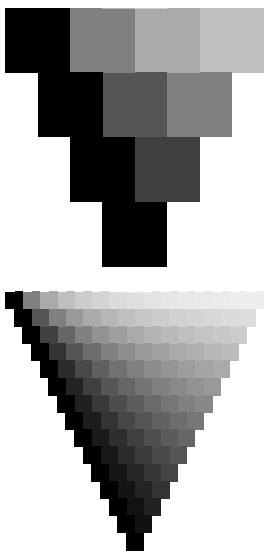

1/2

1/2

1/2

1/2



1/2

1/2

1/2

1/2

1/2



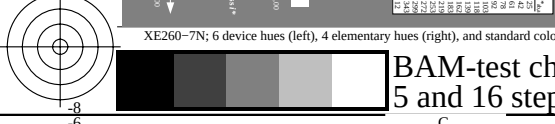
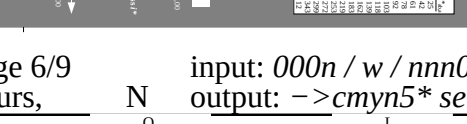




www.ps.bam.de/XE26/10L/L26E00NA.PS/.TXT, Page 6/9; N: transfer and output, VT=1.0, A4
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D); Separation: n

BAM-test chart XE26; Colorimetric systems, Page 6/9
5 and 16 step device colour scales: standard colours.

```
input: 000n / w / nnn0 / www set...
output: ->cmyn5* setcmvcolor
```


C

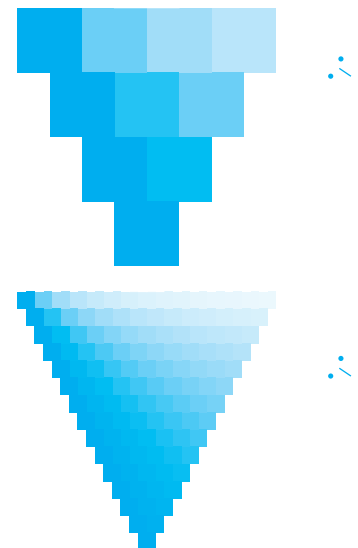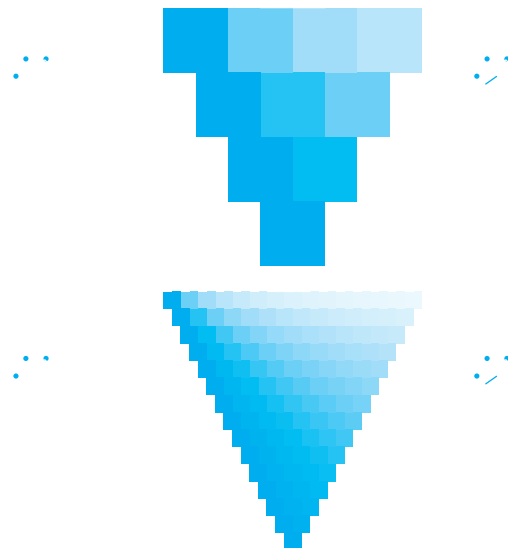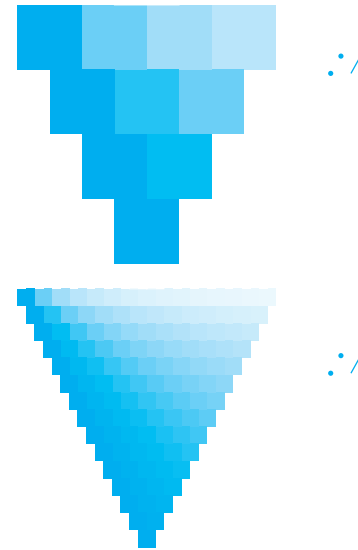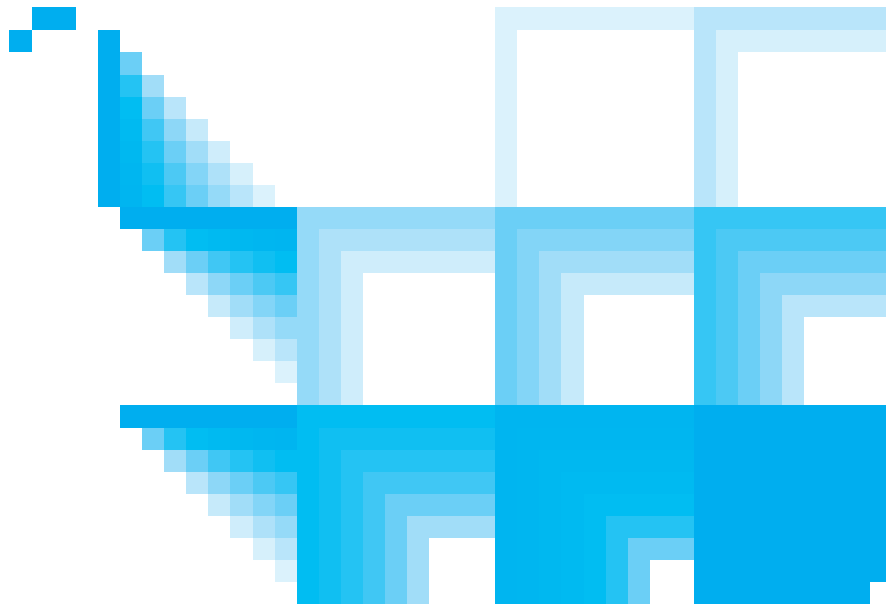

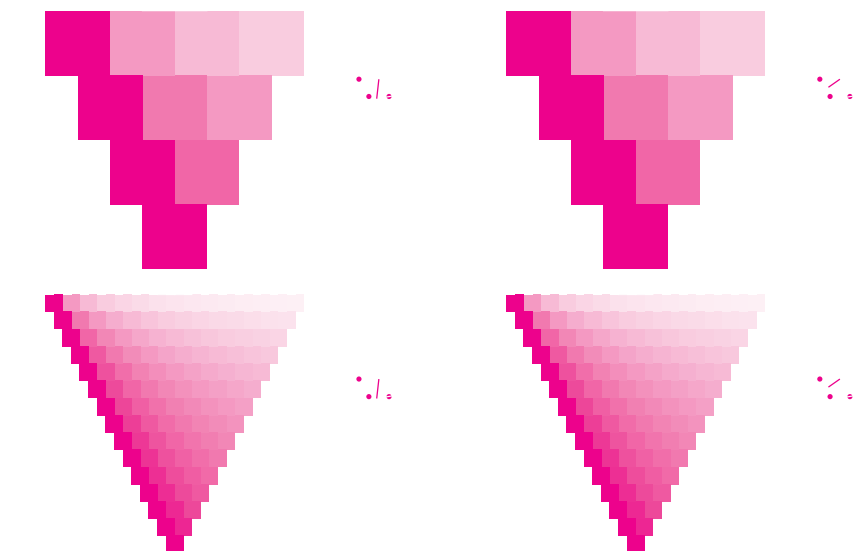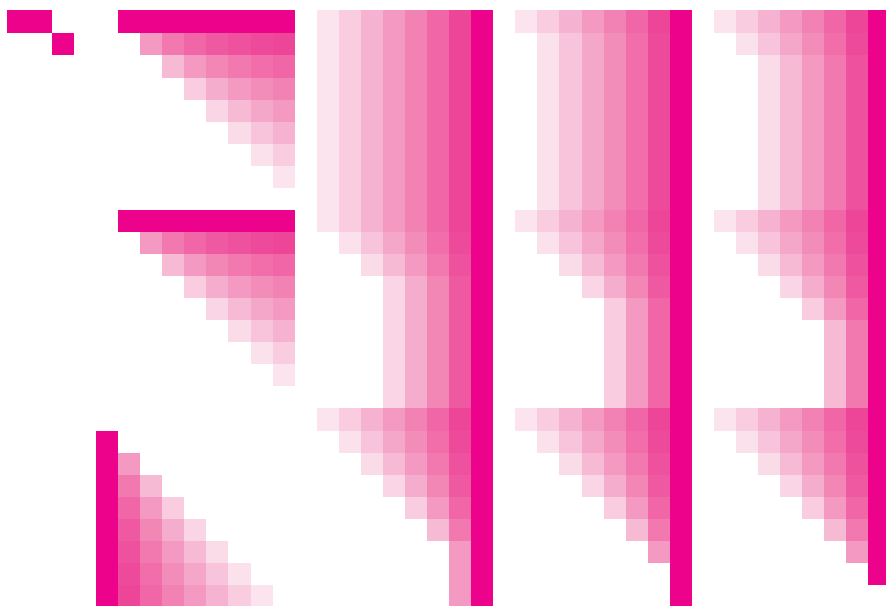

XE260-7N; 6 device hues (left), 4 elementary hues (right), and standard colour data: *cmym4**, page: 8; separation: M

m

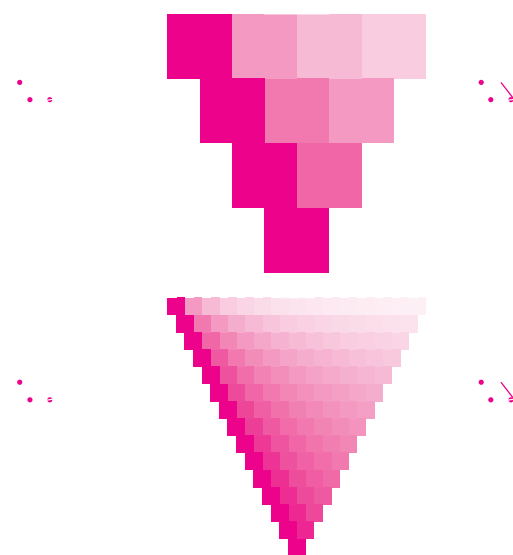

XE260-7N; 6 device hues (left), 4 elementary hues (right), and standard colour data: *cmym4**, page: 8; separation: M

y

