


See for similar files: <http://www.ps.bam.de/XE30/>; www.ps.bam.de/XE.HTM
Technical information: <http://www.ps.bam.de>
Version 2.1, io=1,1

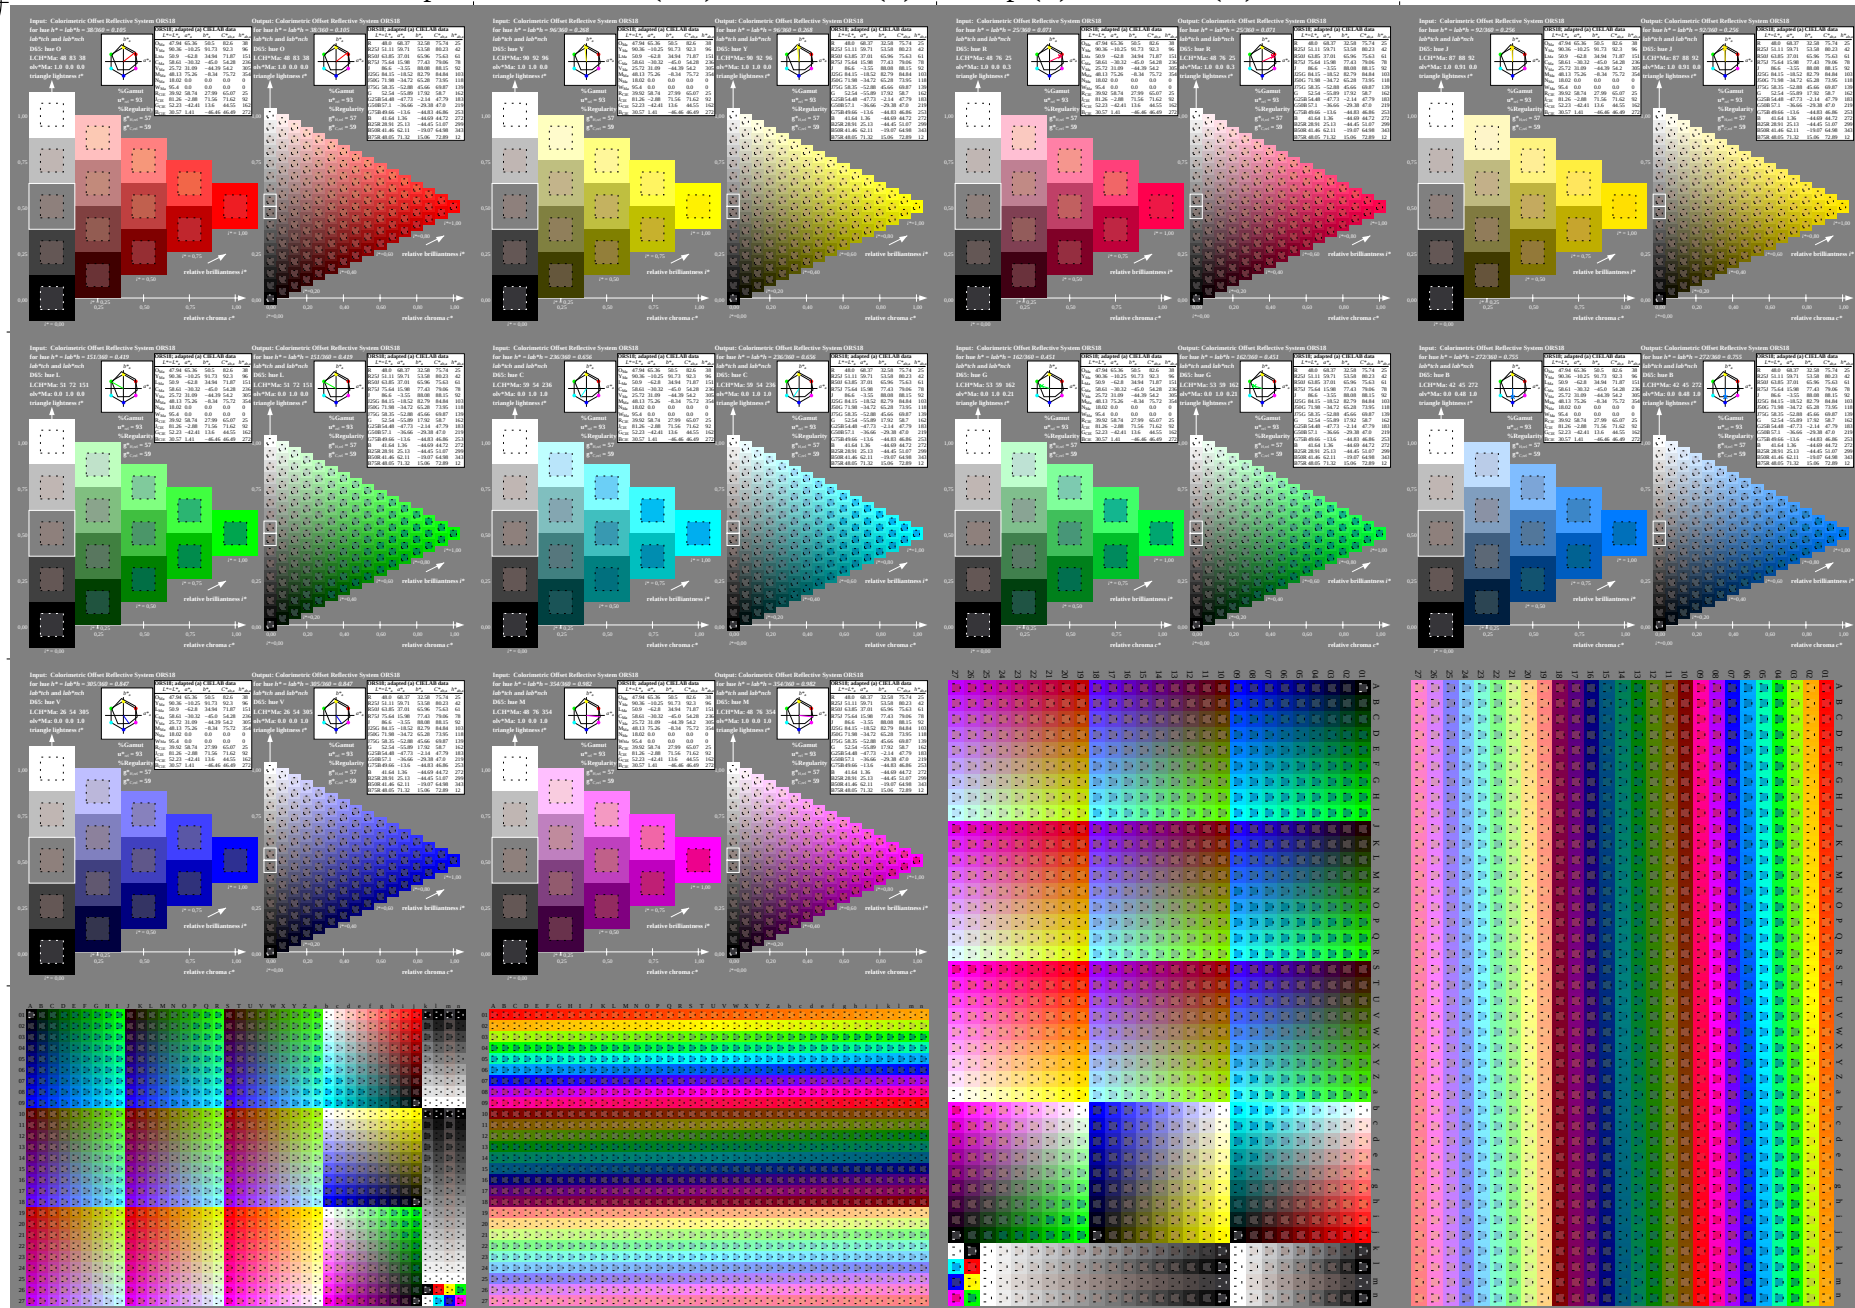


XE300-7N; 6 device hues (left), 4 elementary hues (right), and standard colour data: cmyn4*, page: 1

BAM registration: 20080101-XE30/10L/L30E00NA.PS/.TXT BAM material: code=rh4ta
application for evaluation and measurement of printer or monitor systems

See for similar files: <http://www.ps.bam.de/XE30/>; www.ps.bam.de/XE.HTM
Technical information: <http://www.ps.bam.de>
Version 2.1, io=1,1


BAM registration: 20080101-XE30/10L/L30E00NA.PS/.TXT BAM material: code=rhdata
application for evaluation and measurement of printer or monitor systems

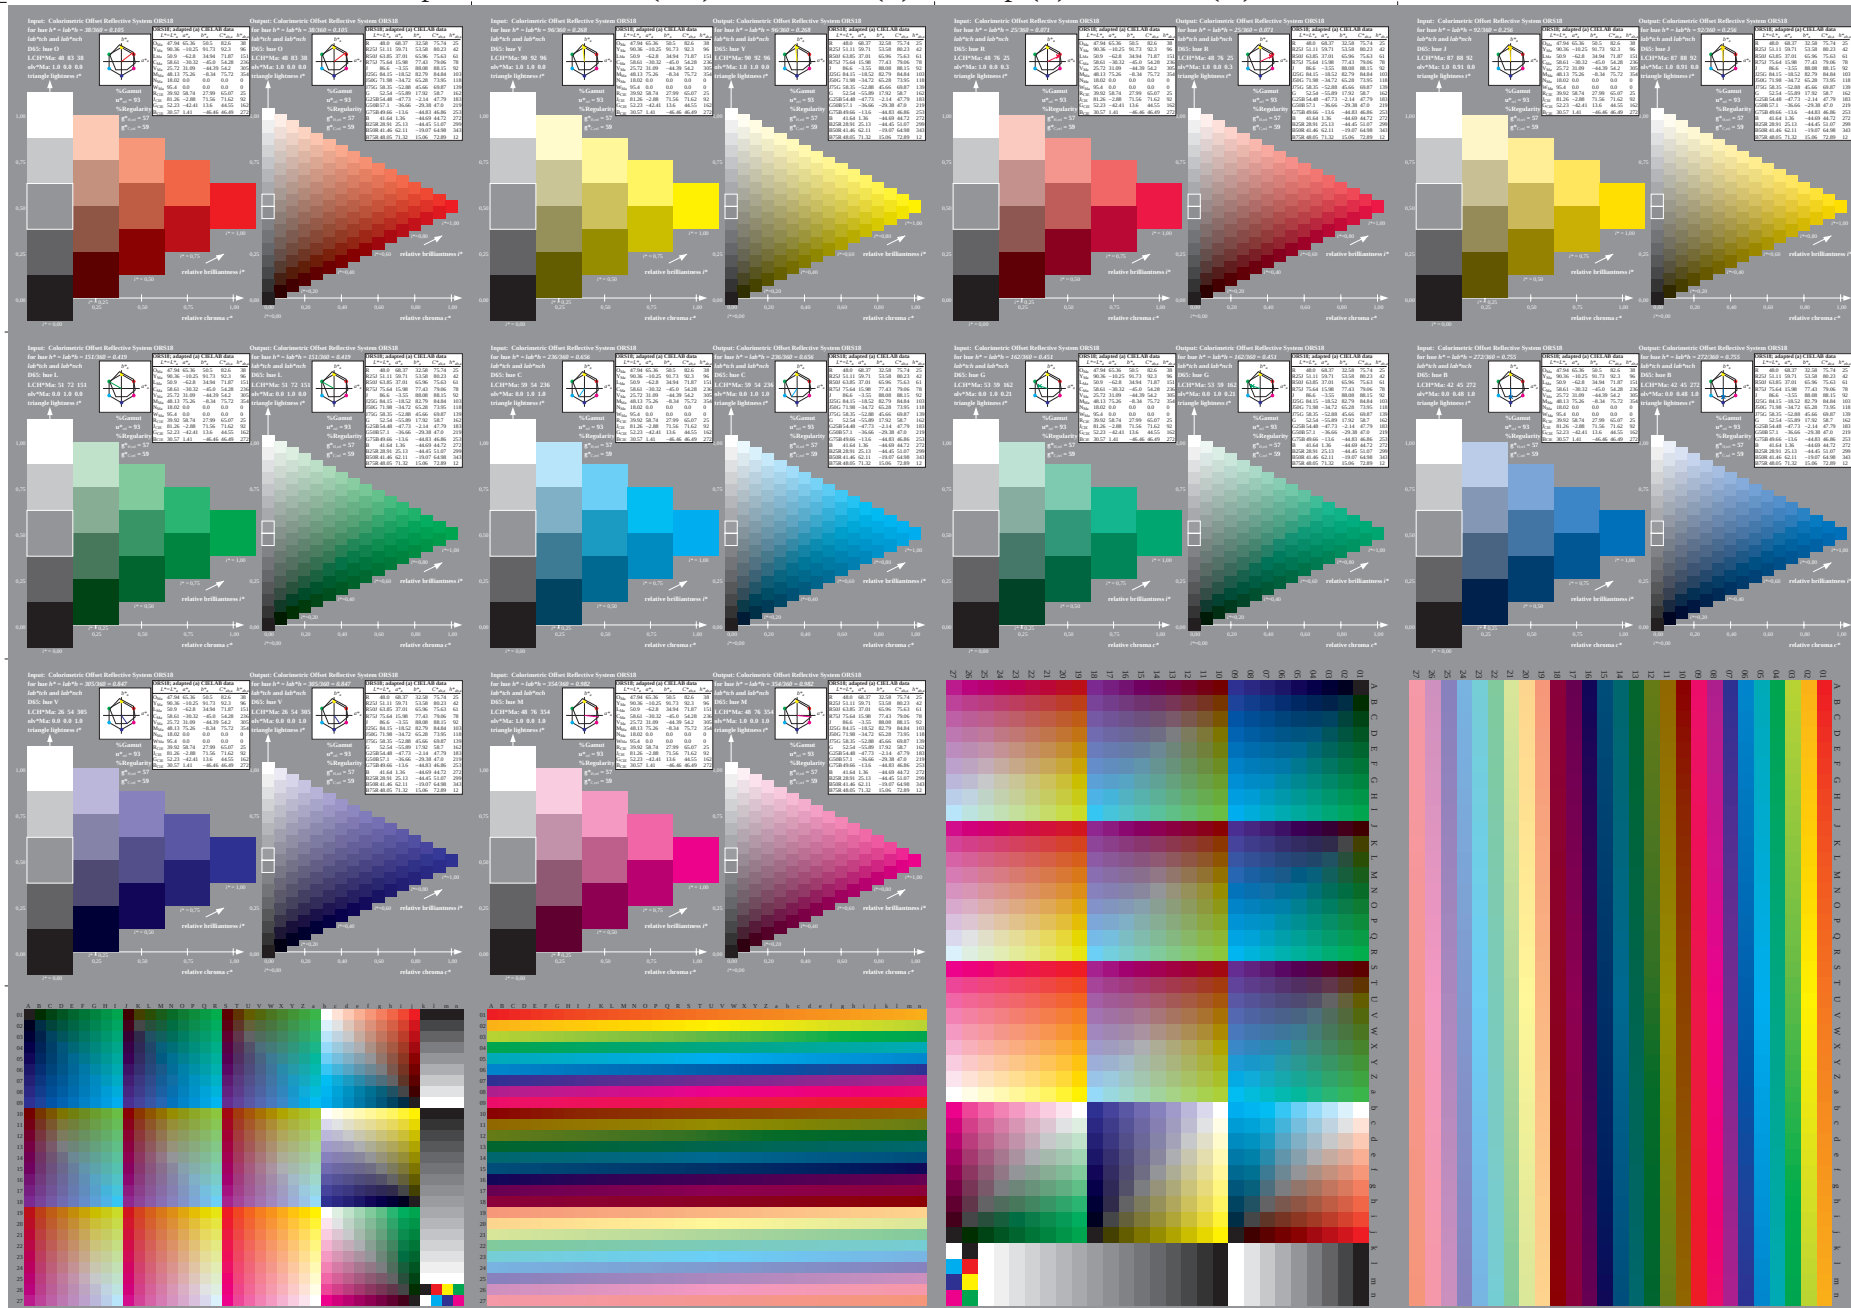




XE300-7N; 6 device hues (left), 4 elementary hues (right), and standard colour data: cmyd4*, page: 2

BAM-test chart XE30; Colorimetric systems, Page 2/9
5 and 16 step colour scales; standard colours



input: 000n / w / nnn0 / www set...
output: -> cmyd5* setcmykcolor

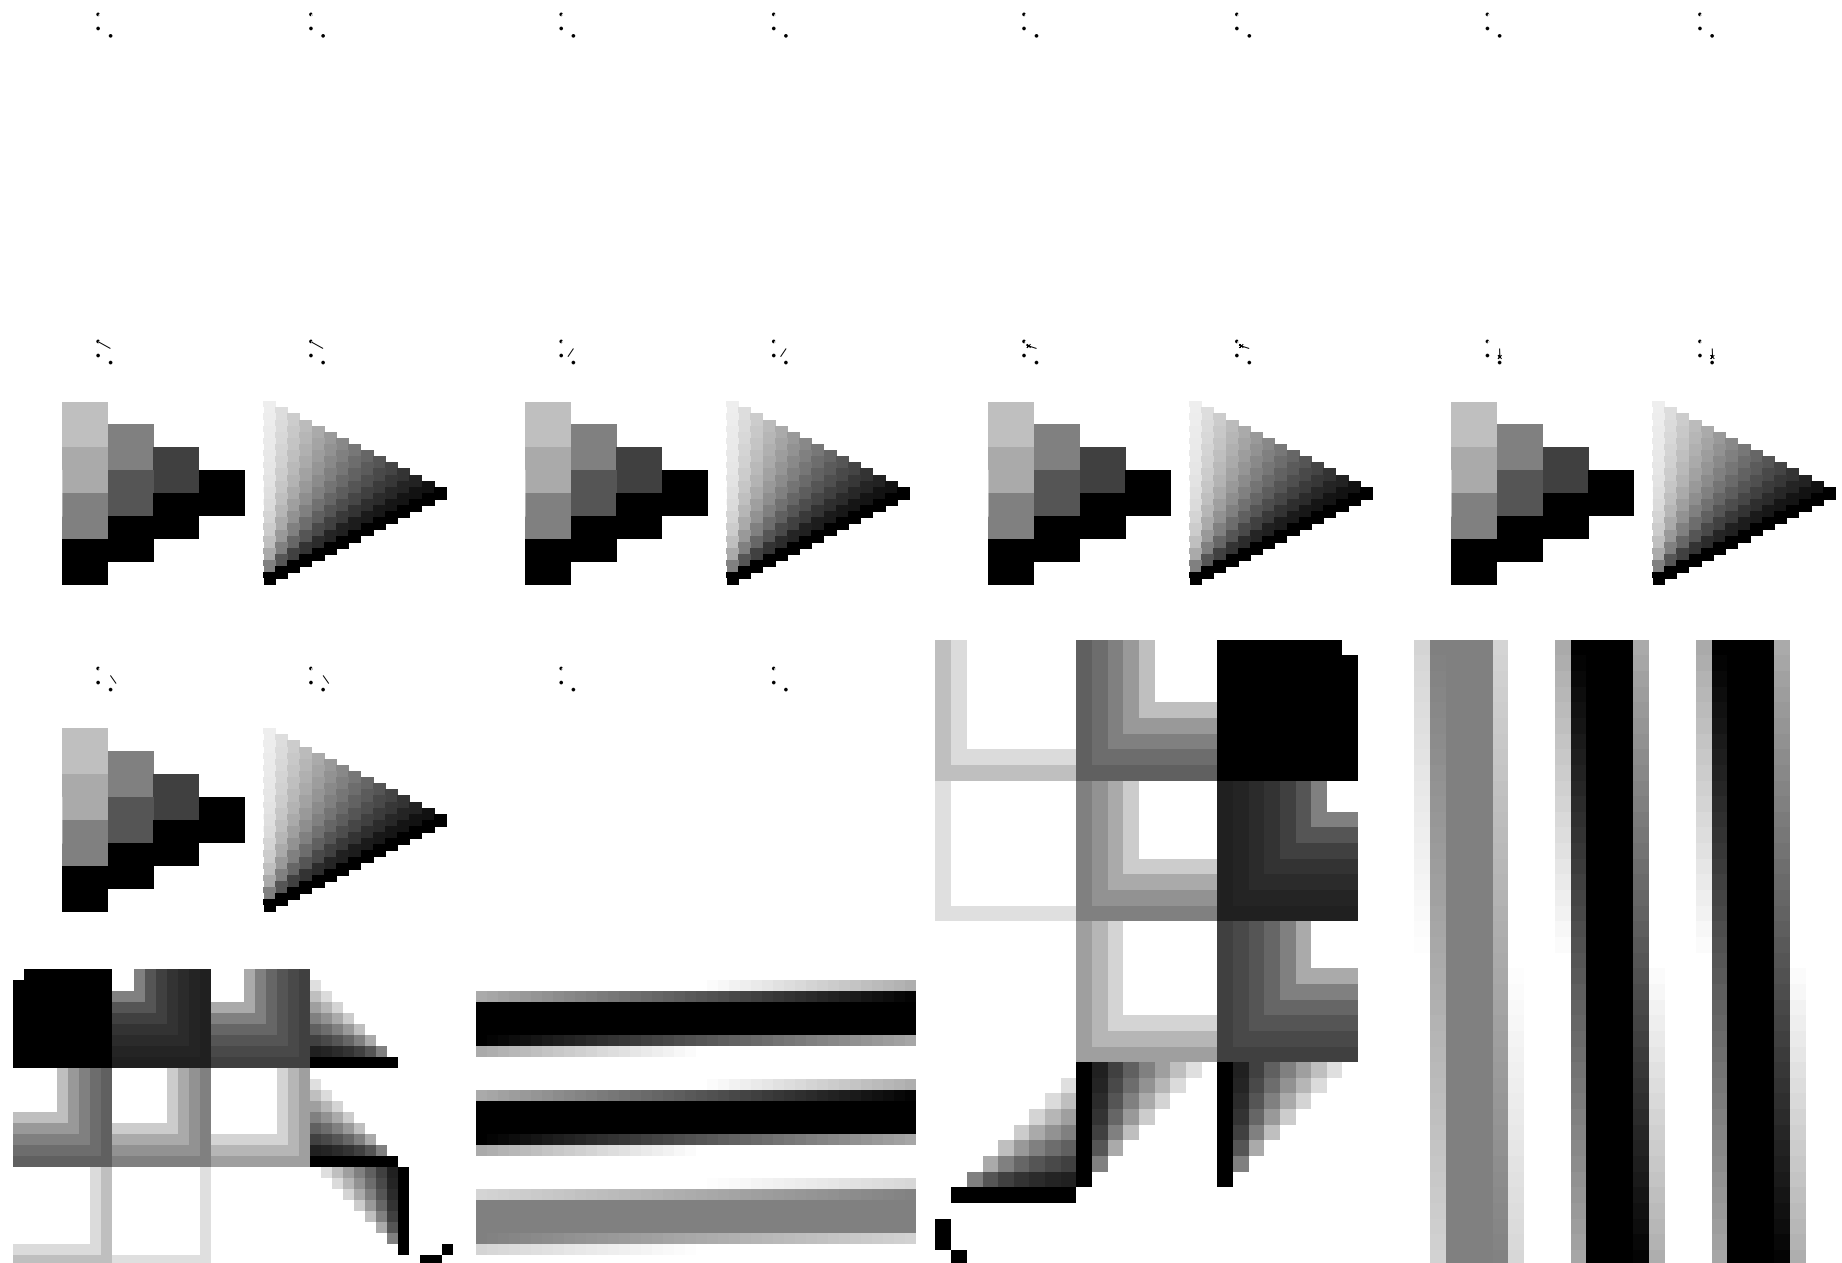

m

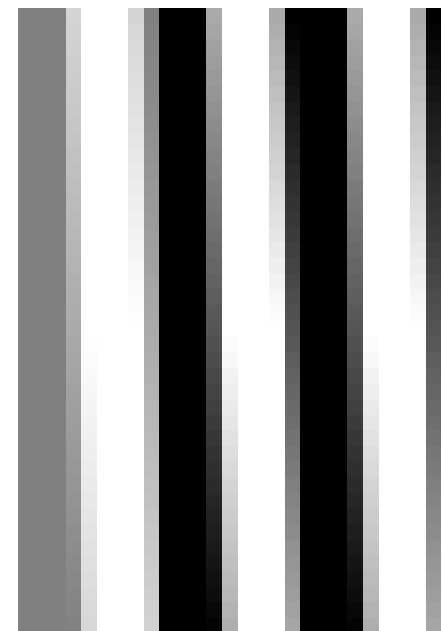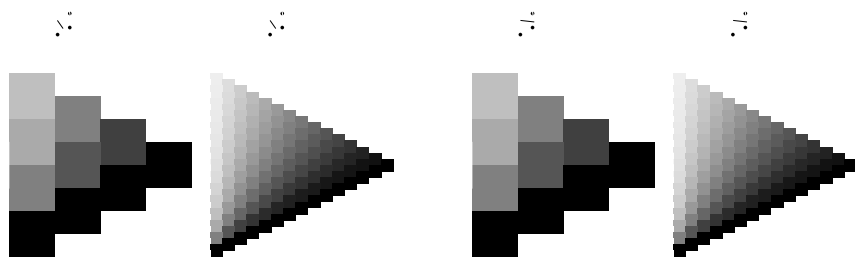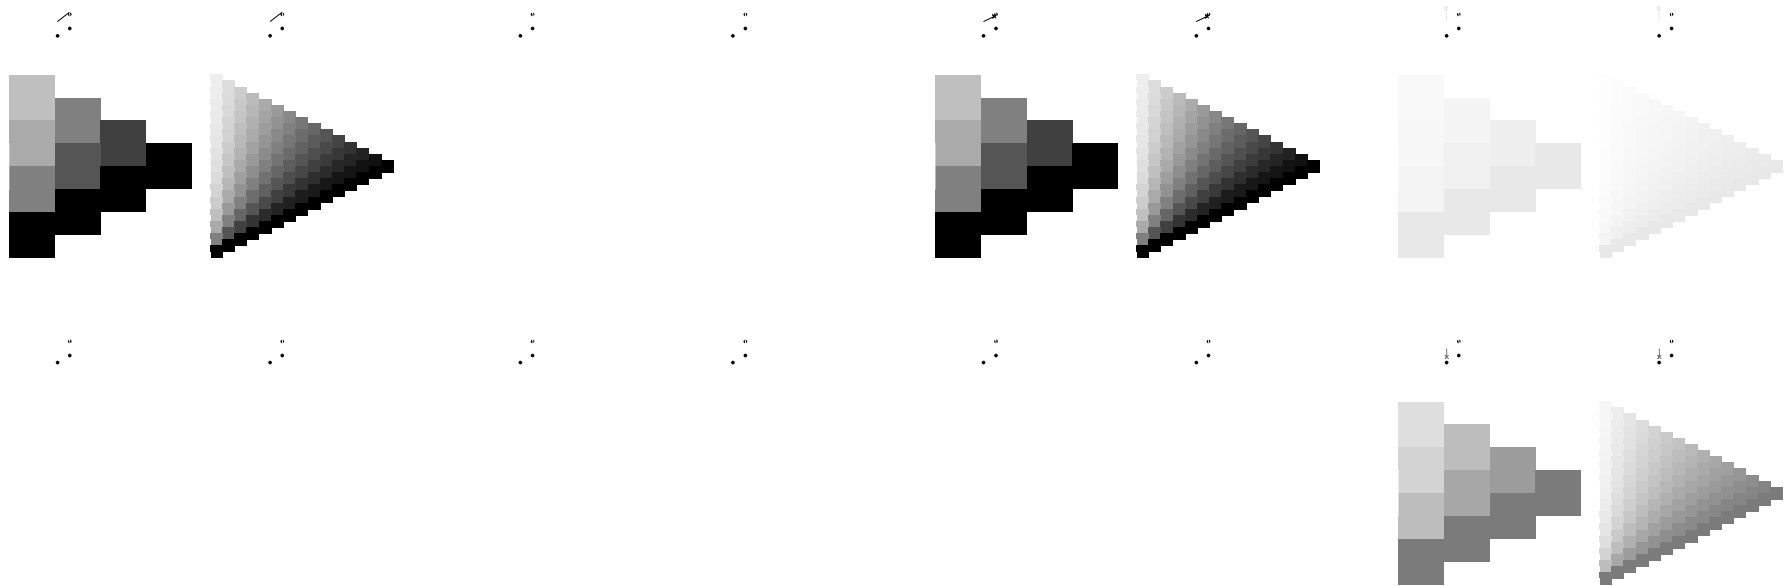



y

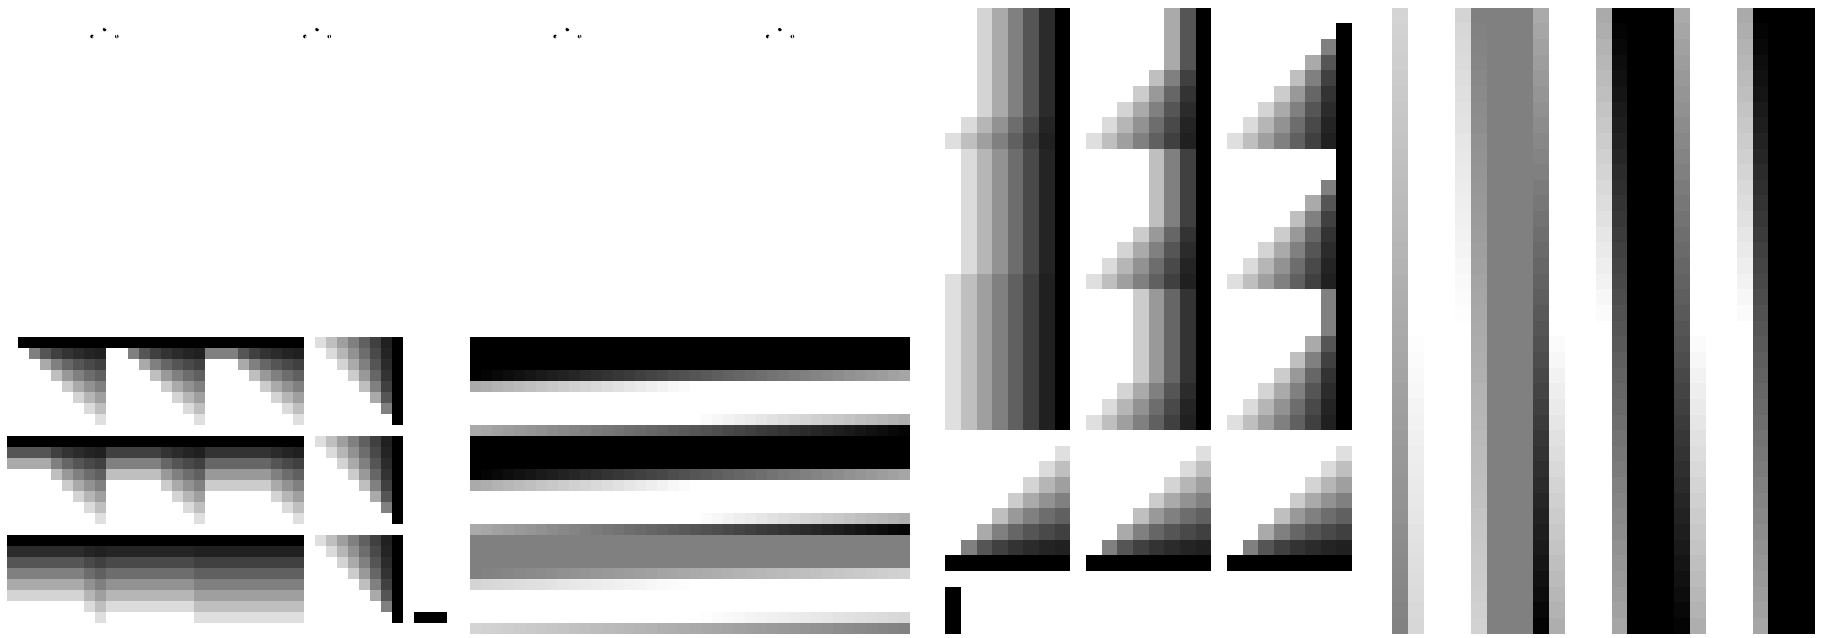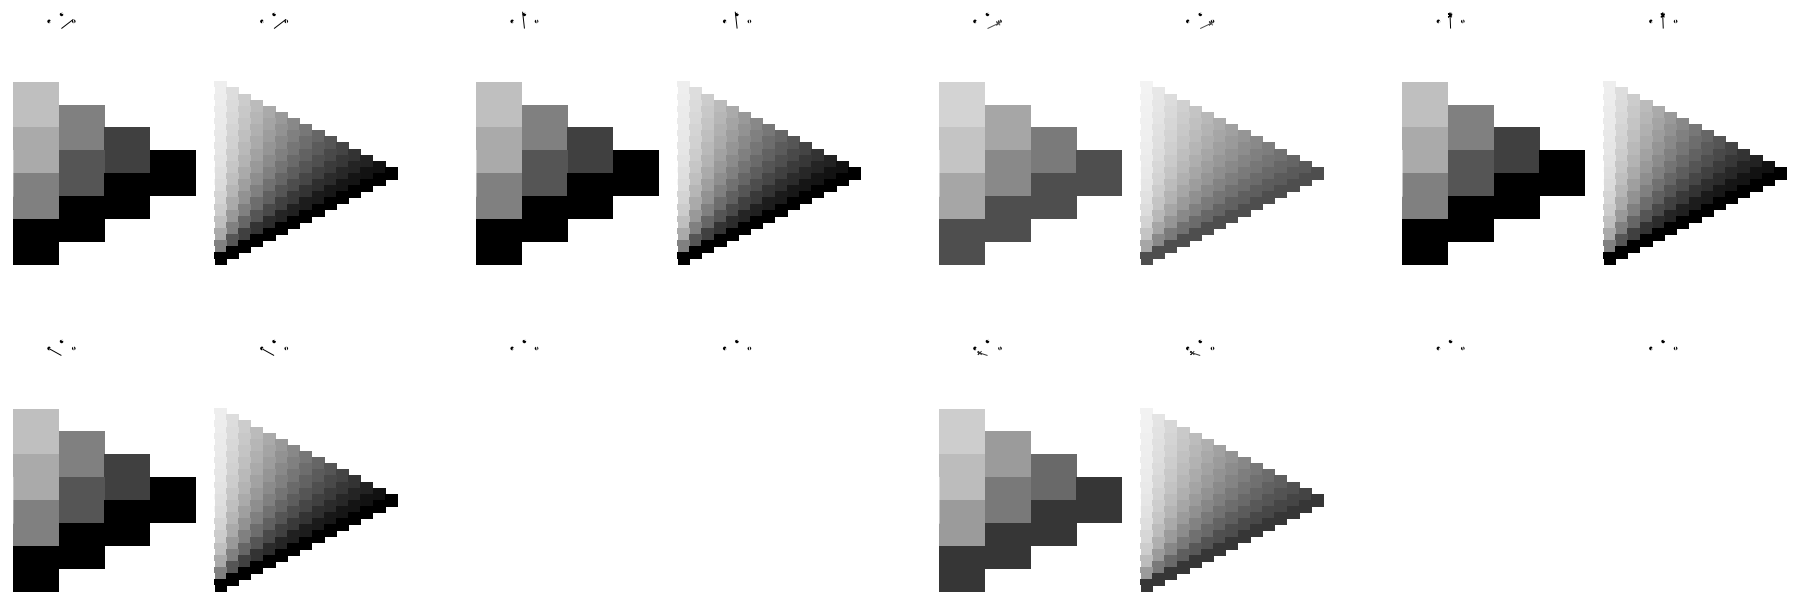


See for similar files: <http://www.ps.bam.de/XE30/>; [www.ps.bam.de/Version 2.1, io=1,1](http://www.ps.bam.de/Version%202.1,%20io=1,1)

BAM registration: 20080101-XE30/10L/L30E00NA.PS/.TXT BAM material: code=rhdata
application for evaluation and measurement of printer or monitor systems

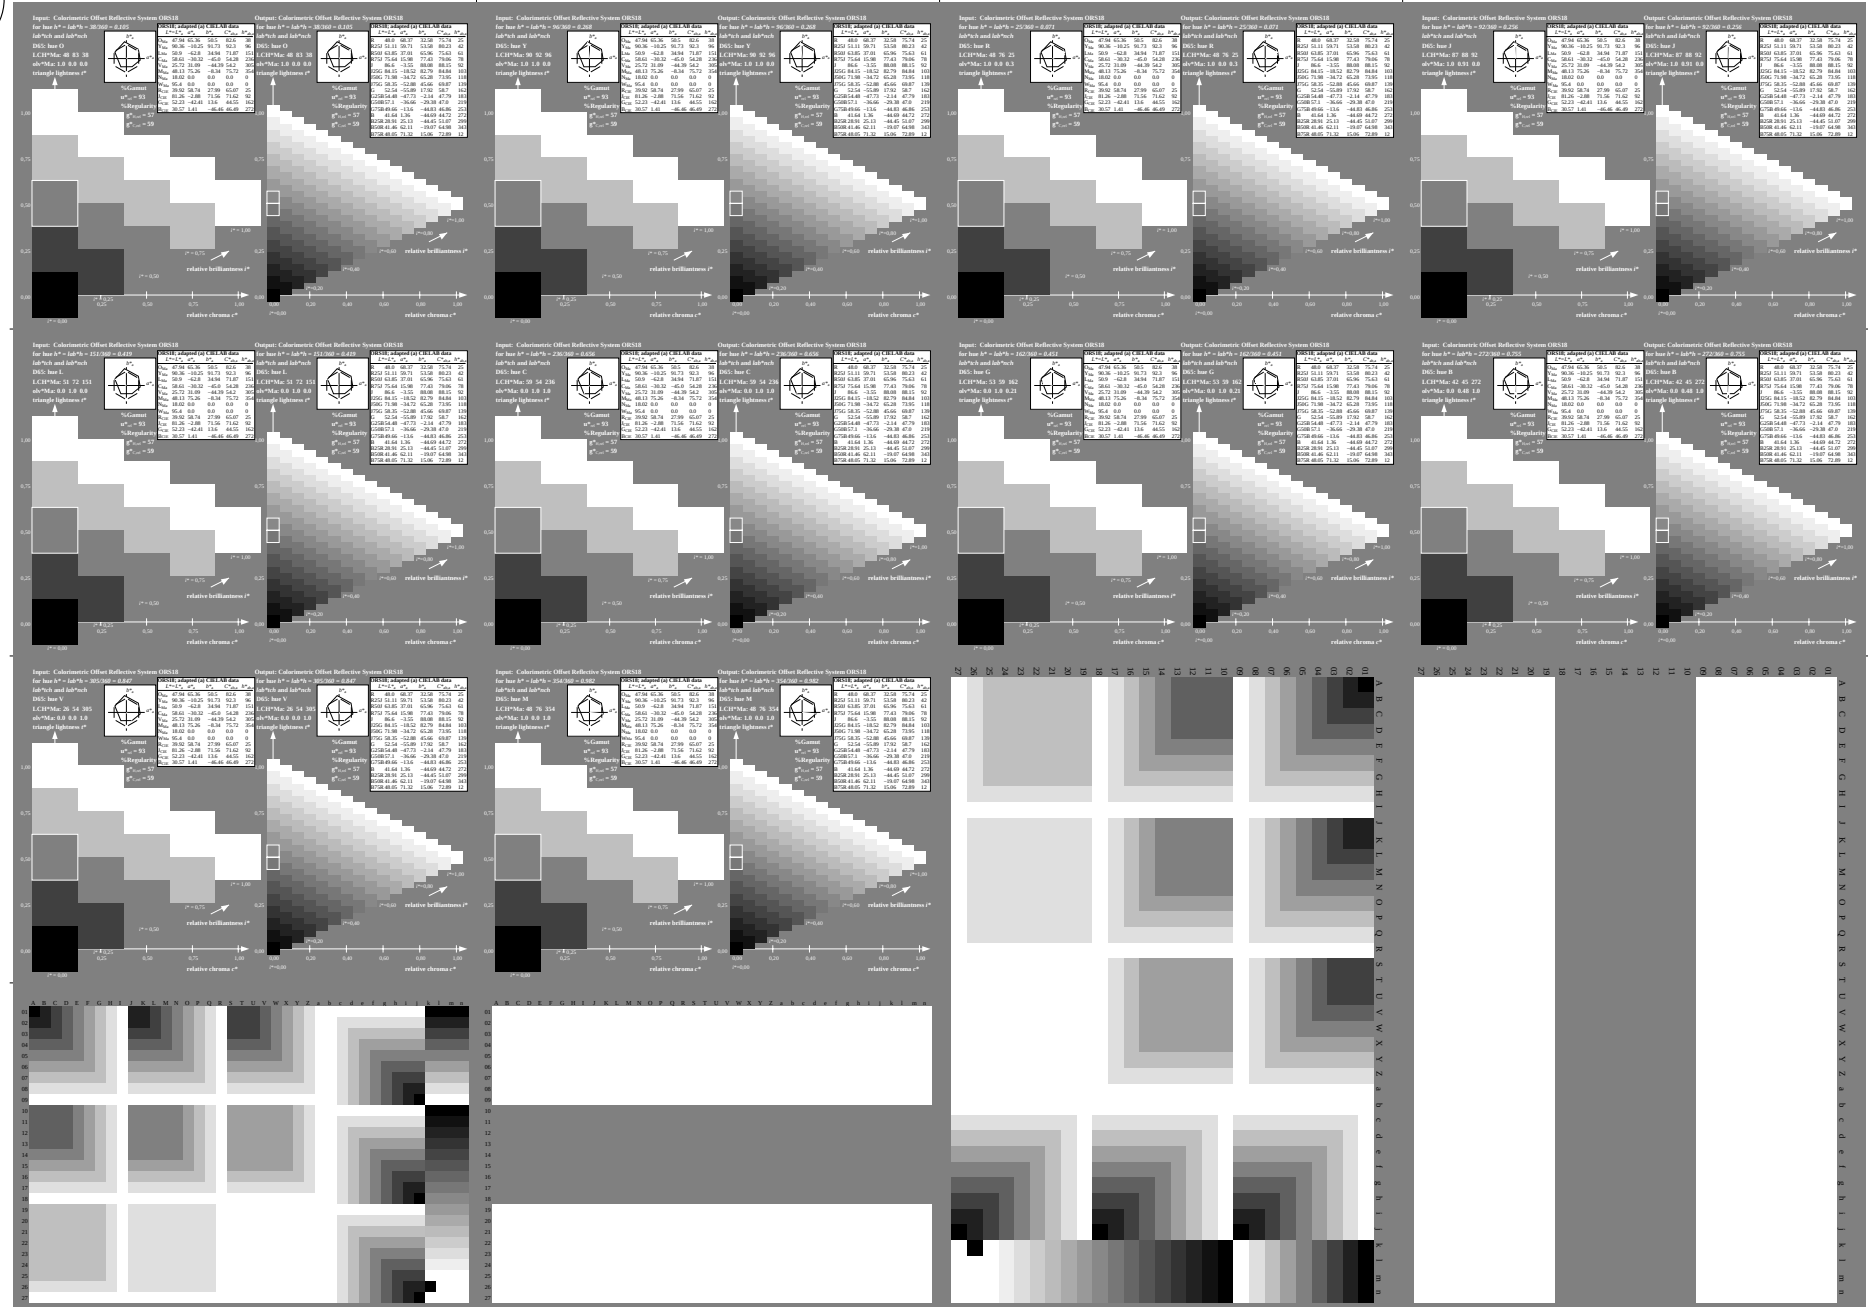

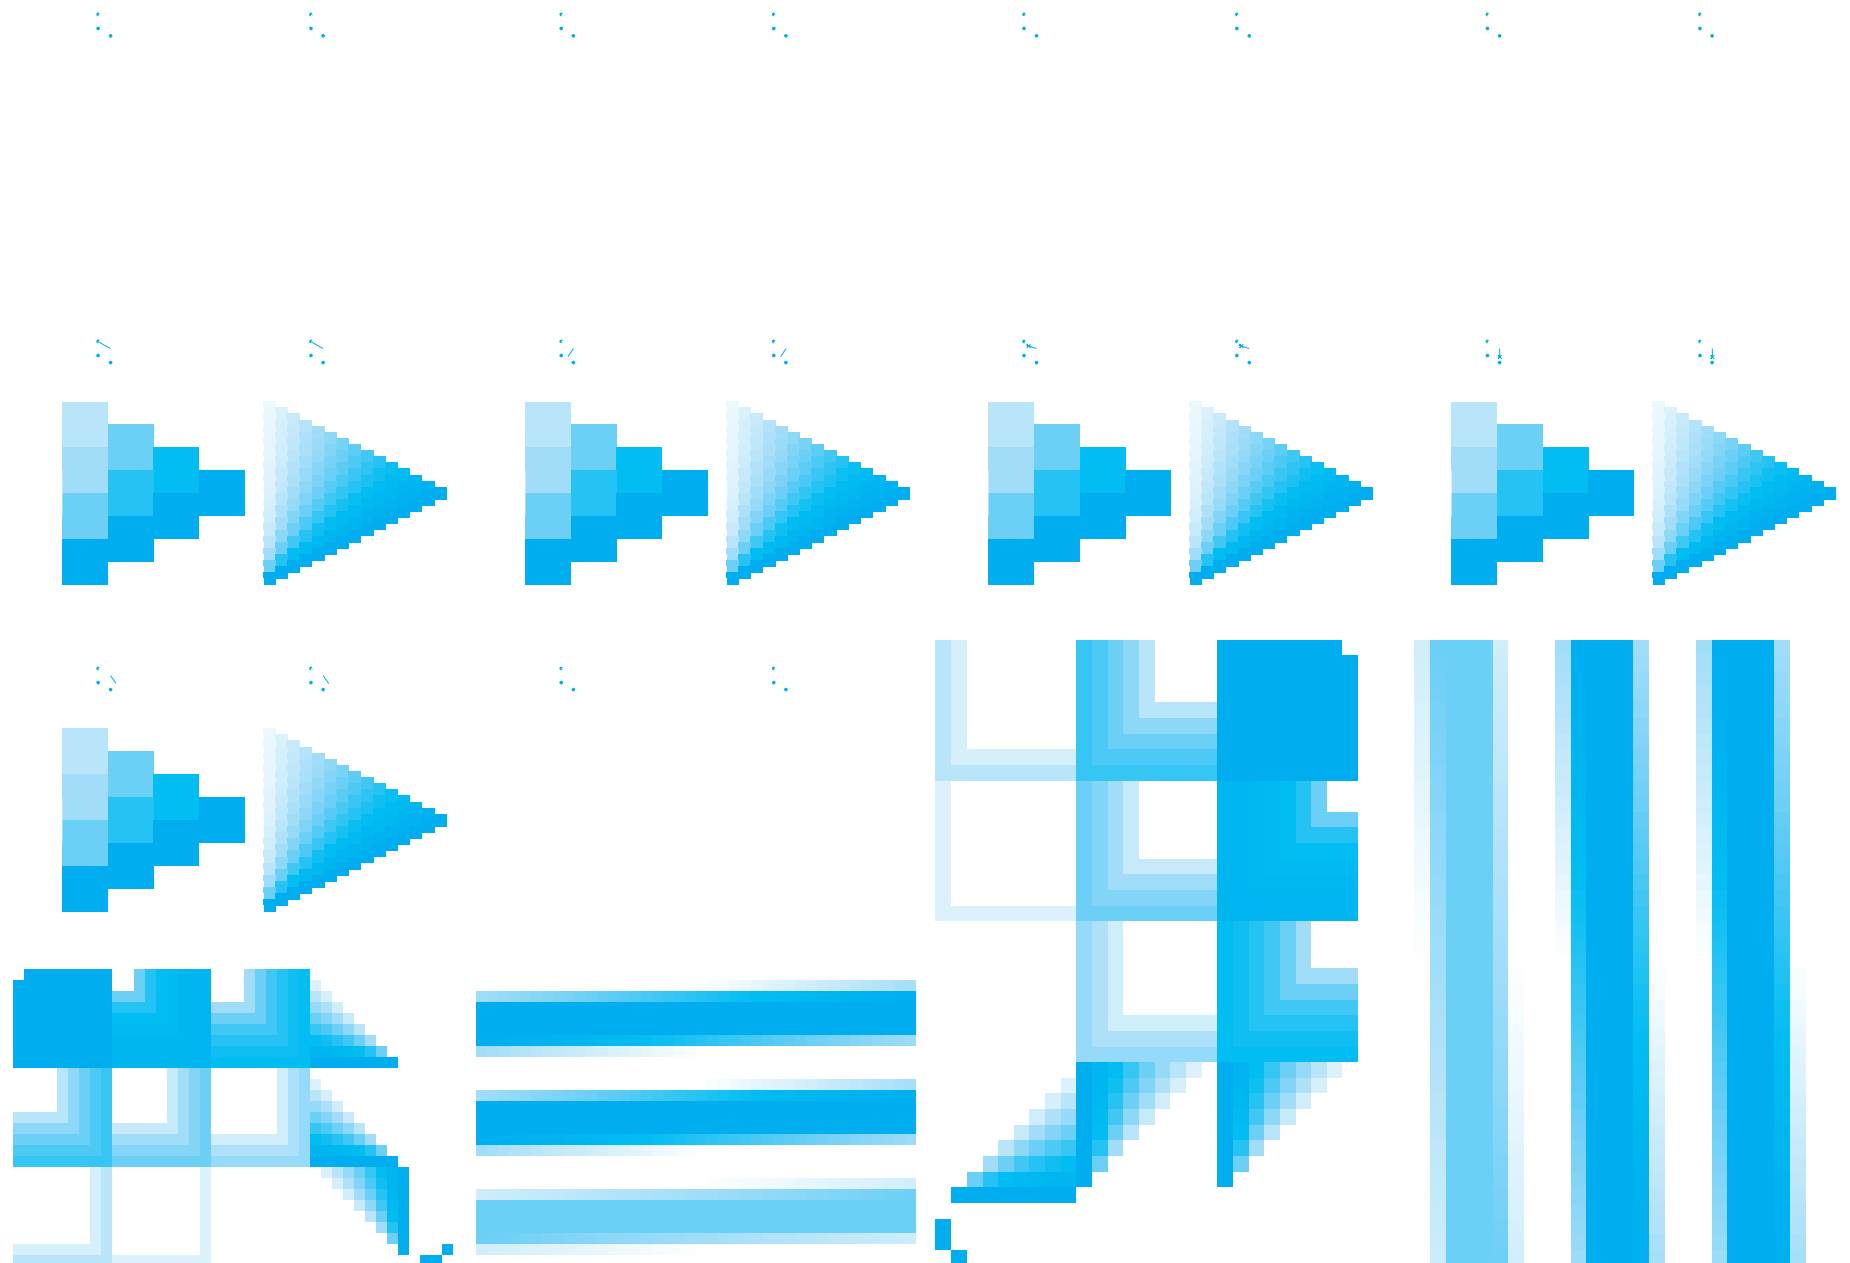

m

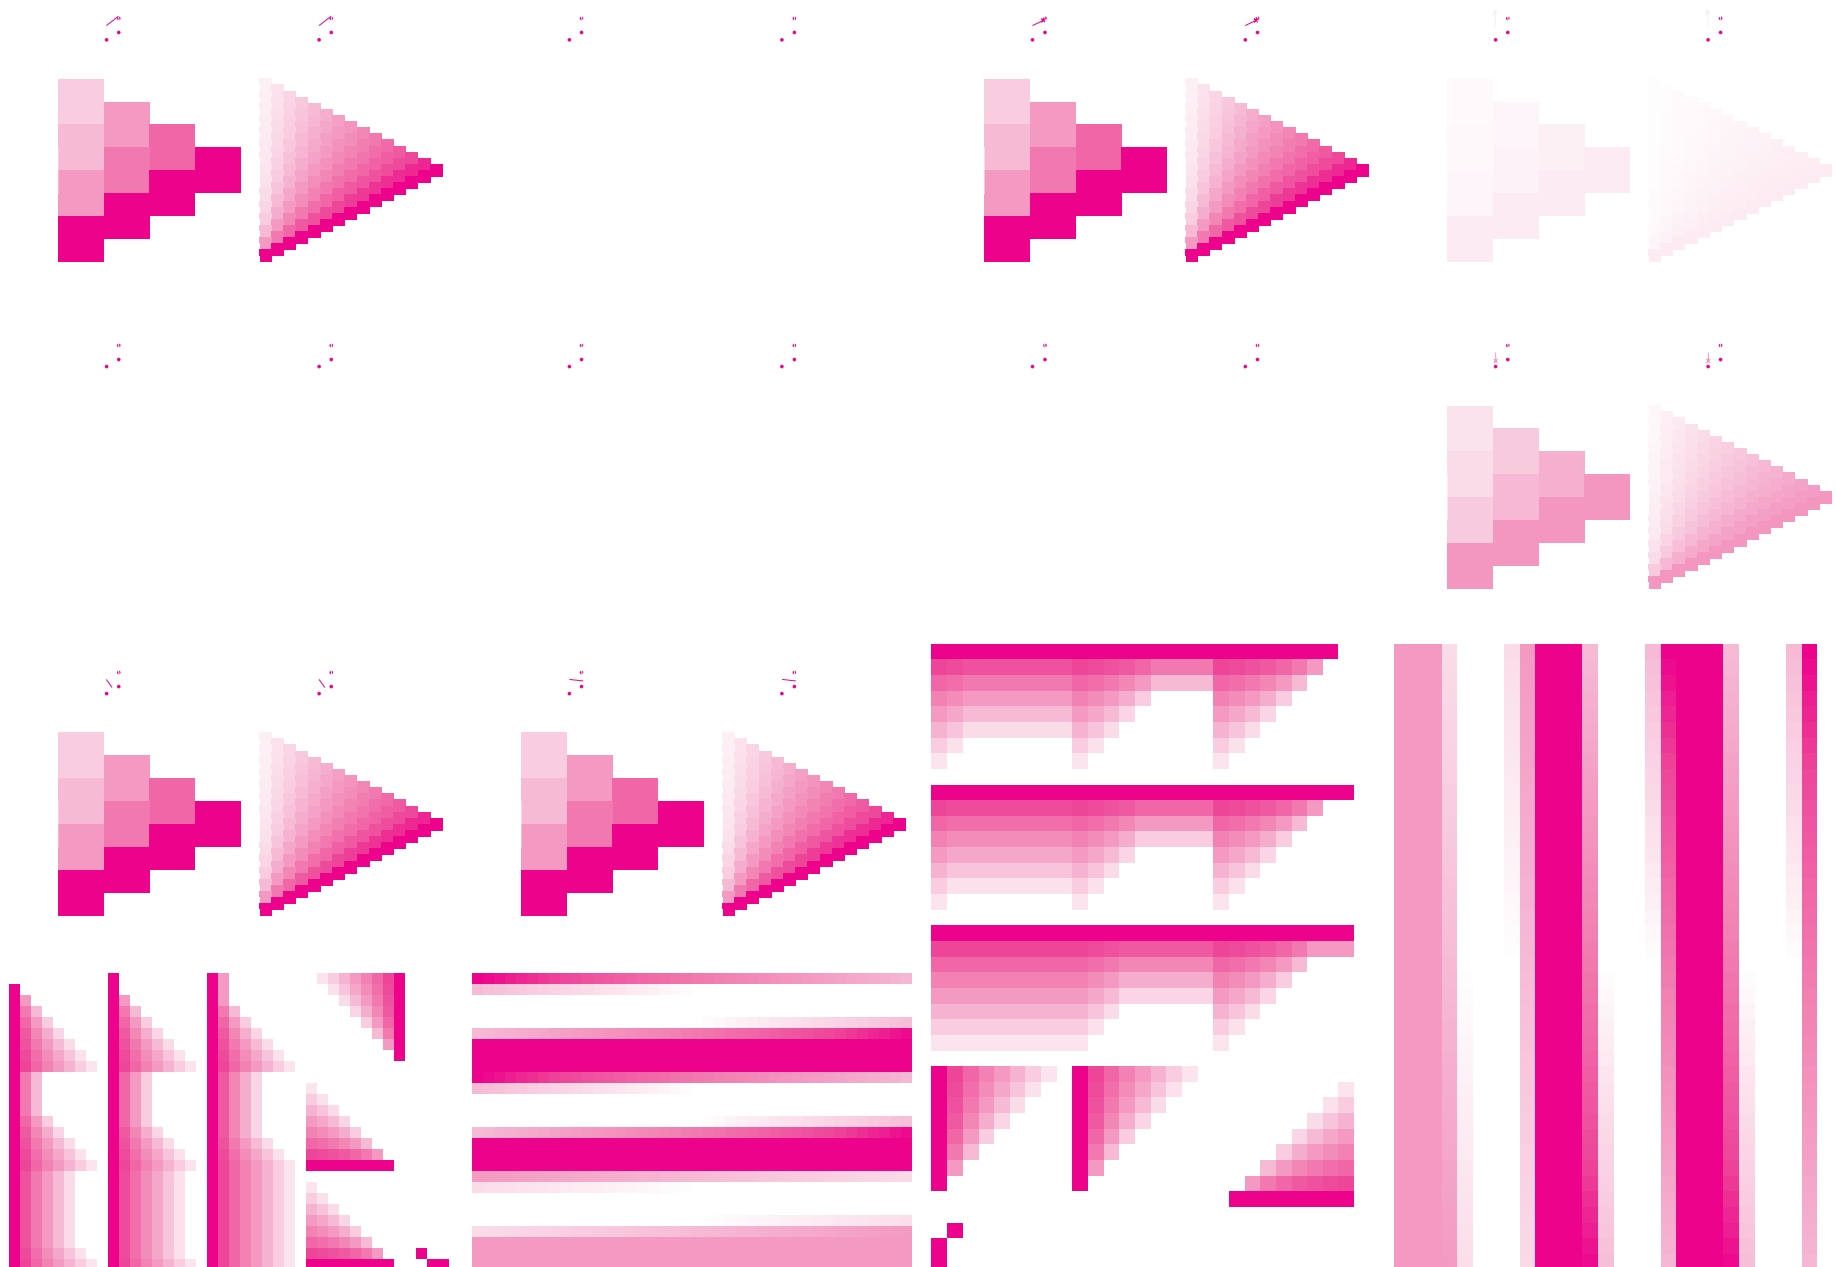

y

50°

50°

40°









40°

30°

30°

20°

20°



60°

60°

70°





70°

80°

80°

90°

90°



100°

100°

110°

110°

