



See for similar files: <http://www.ps.bam.de/XE30/>; www.ps.bam.de/Version 2.1, io=1,1

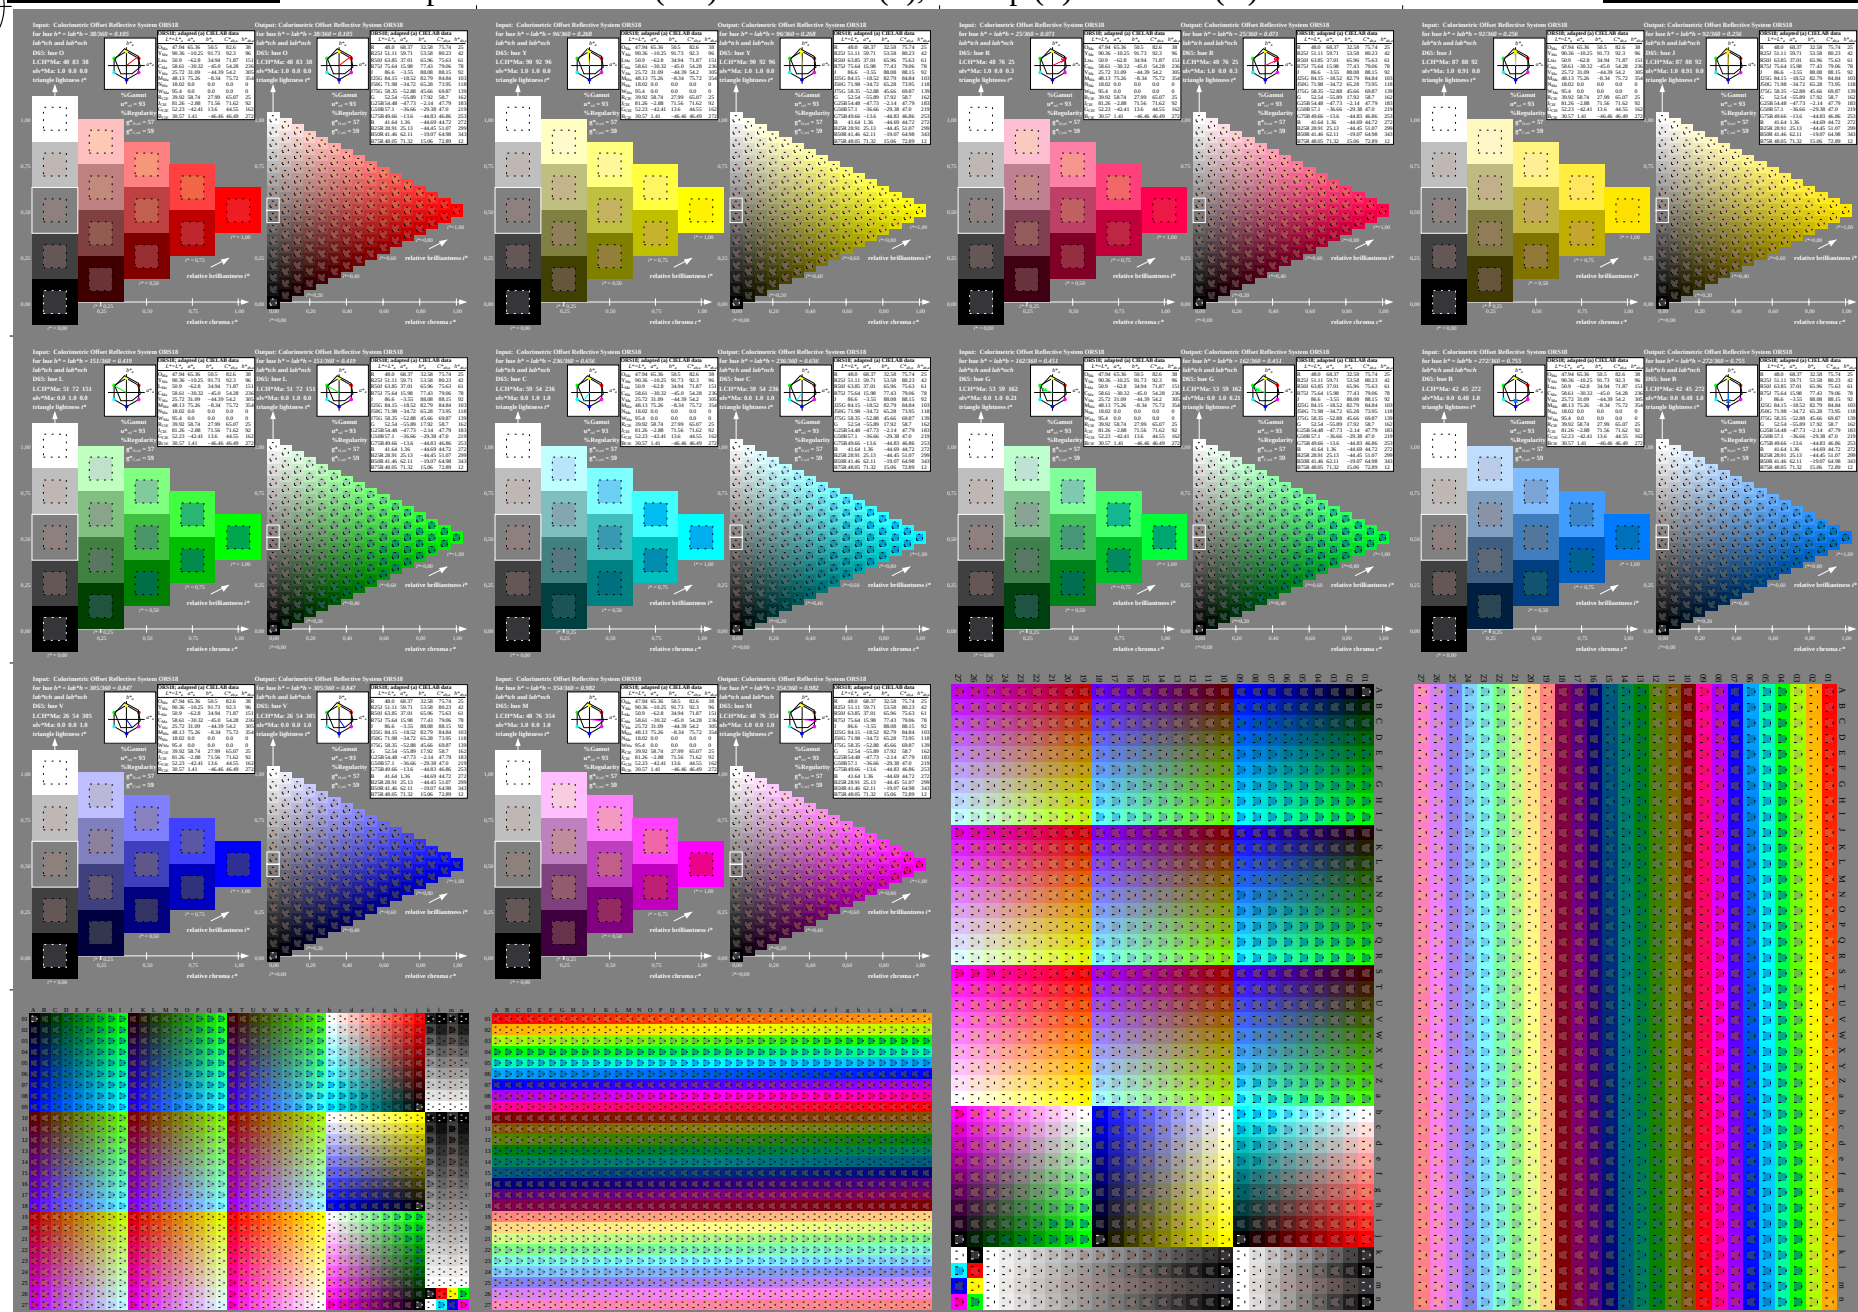

BAM registration: 20080101-XE30/10L/L30E00NP.PS/.PDF BAM material: code=rh4ta
application for evaluation and measurement of printer or monitor systems

See for similar files: <http://www.ps.bam.de/XE30/>; www.ps.bam.de/XE.HTM
Technical information: <http://www.ps.bam.de>
Version 2.1, io=1,1

BAM registration: 20080101-XE30/10L/L30E00NP.PS/.PDF BAM material: code=rhdata
application for evaluation and measurement of printer or monitor systems

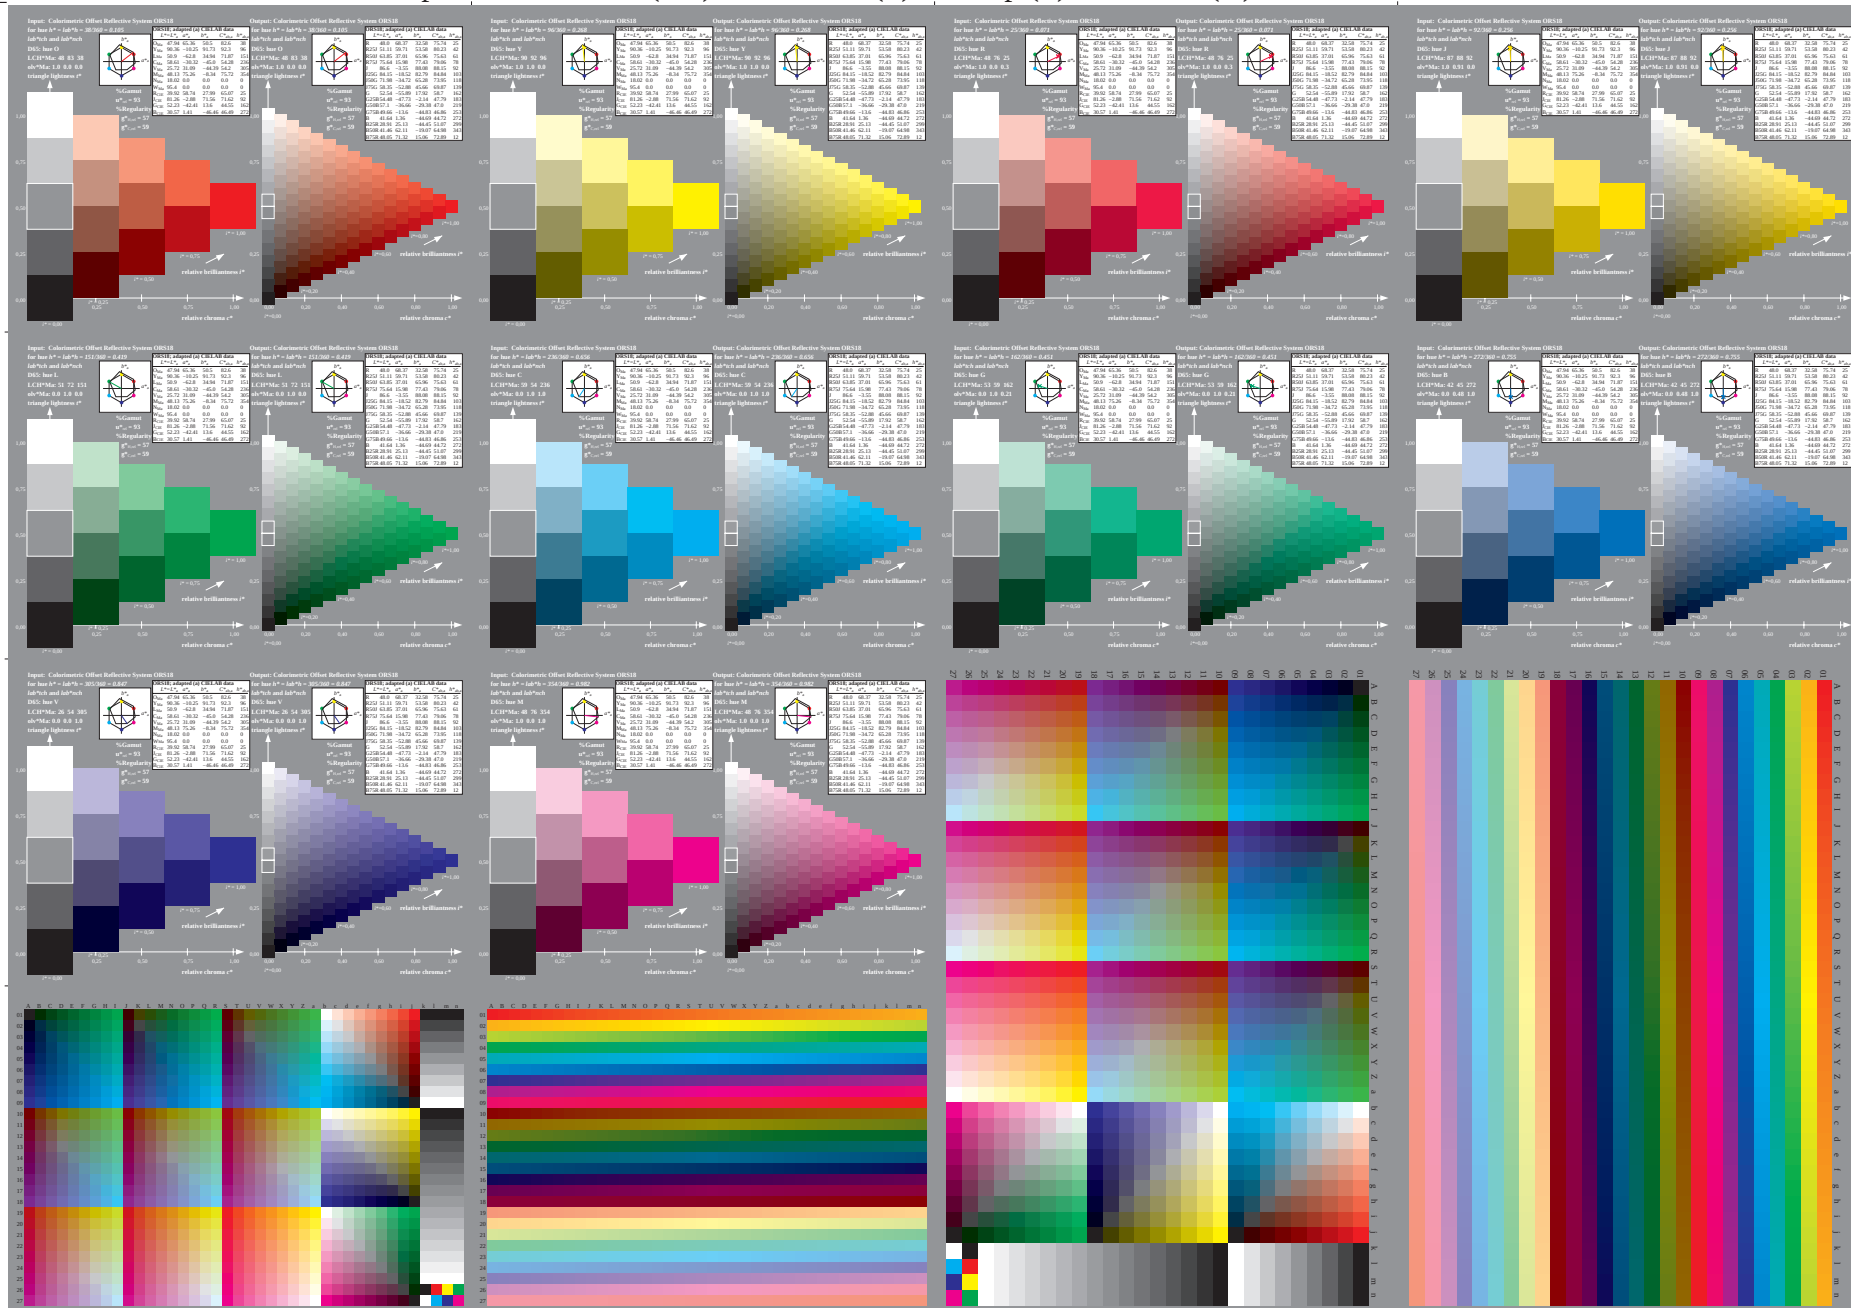


XE300-7N; 6 device hues (left), 4 elementary hues (right), and standard colour data: cmyn4*, page: 2



BAM-test chart XE30; Colorimetric systems, Page 2/9
5 and 16 step colour scales; standard colours

input: 000n / w / nnn0 / www set...
output: ->cmyn5* setcmymcolor



C

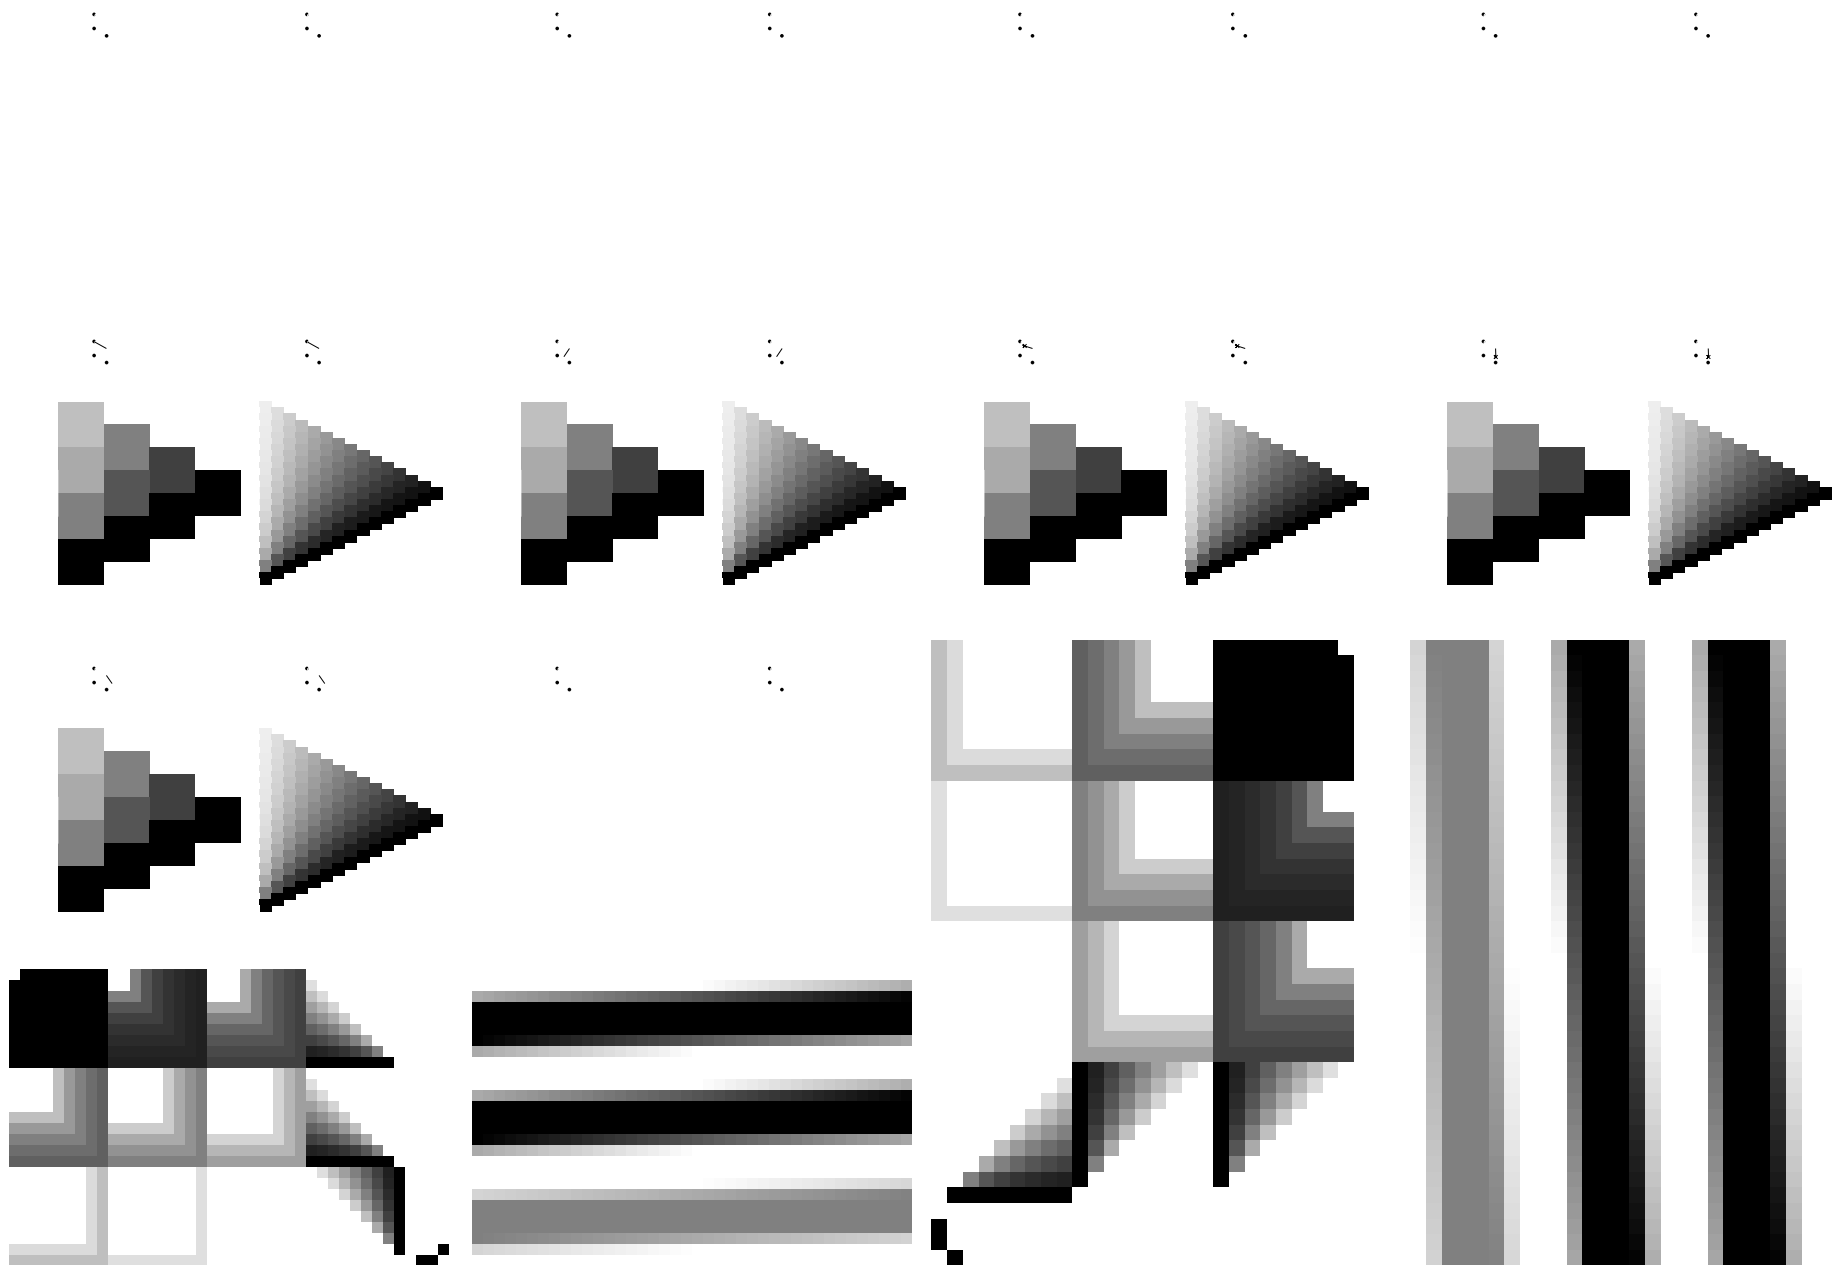


m

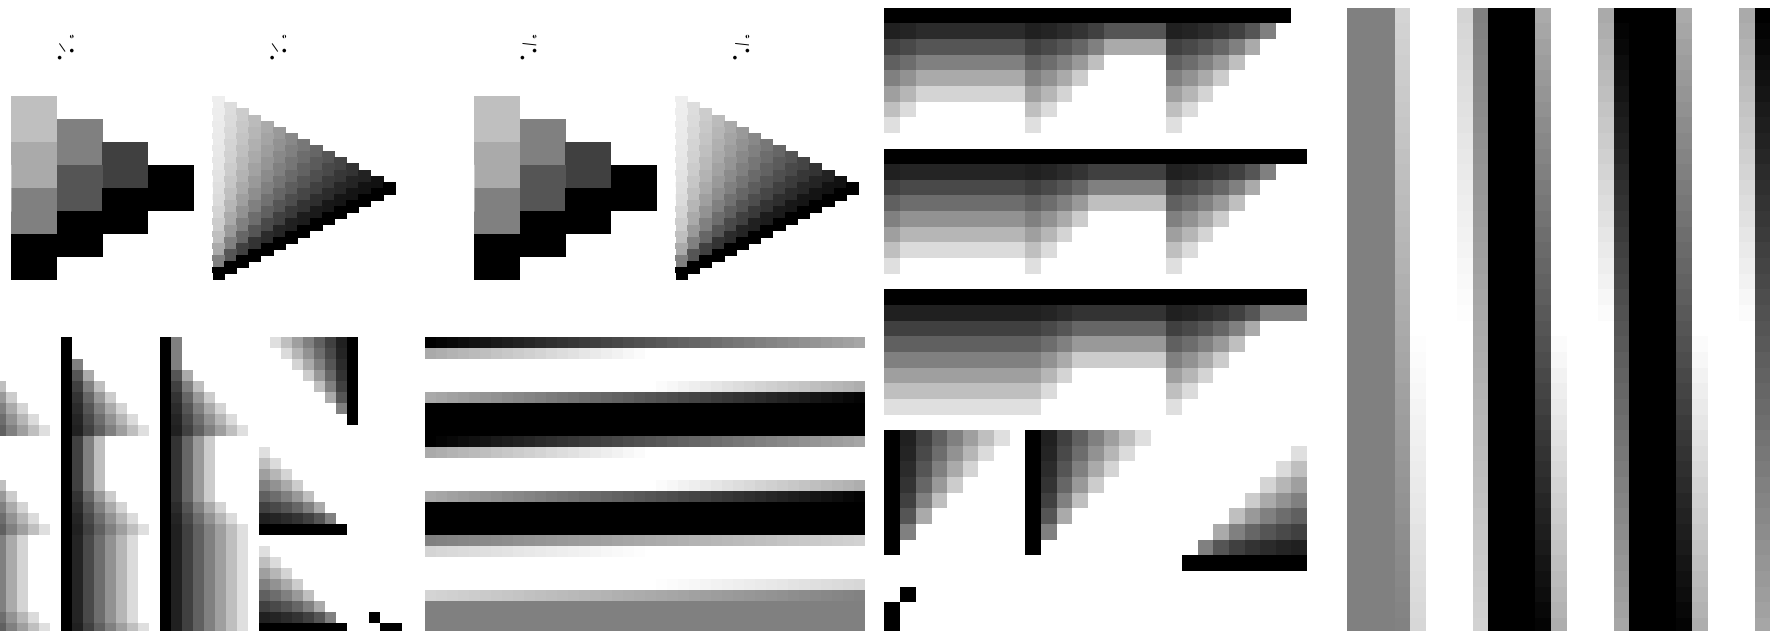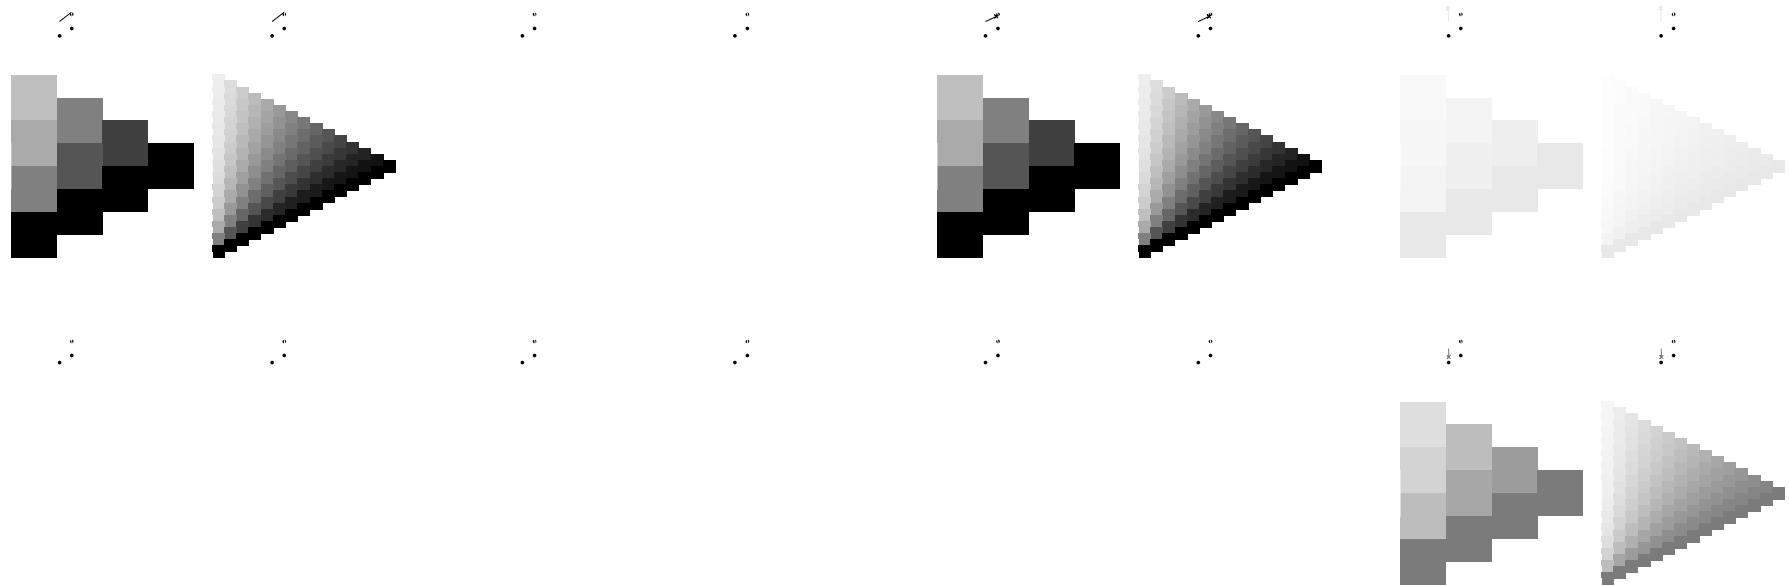


y

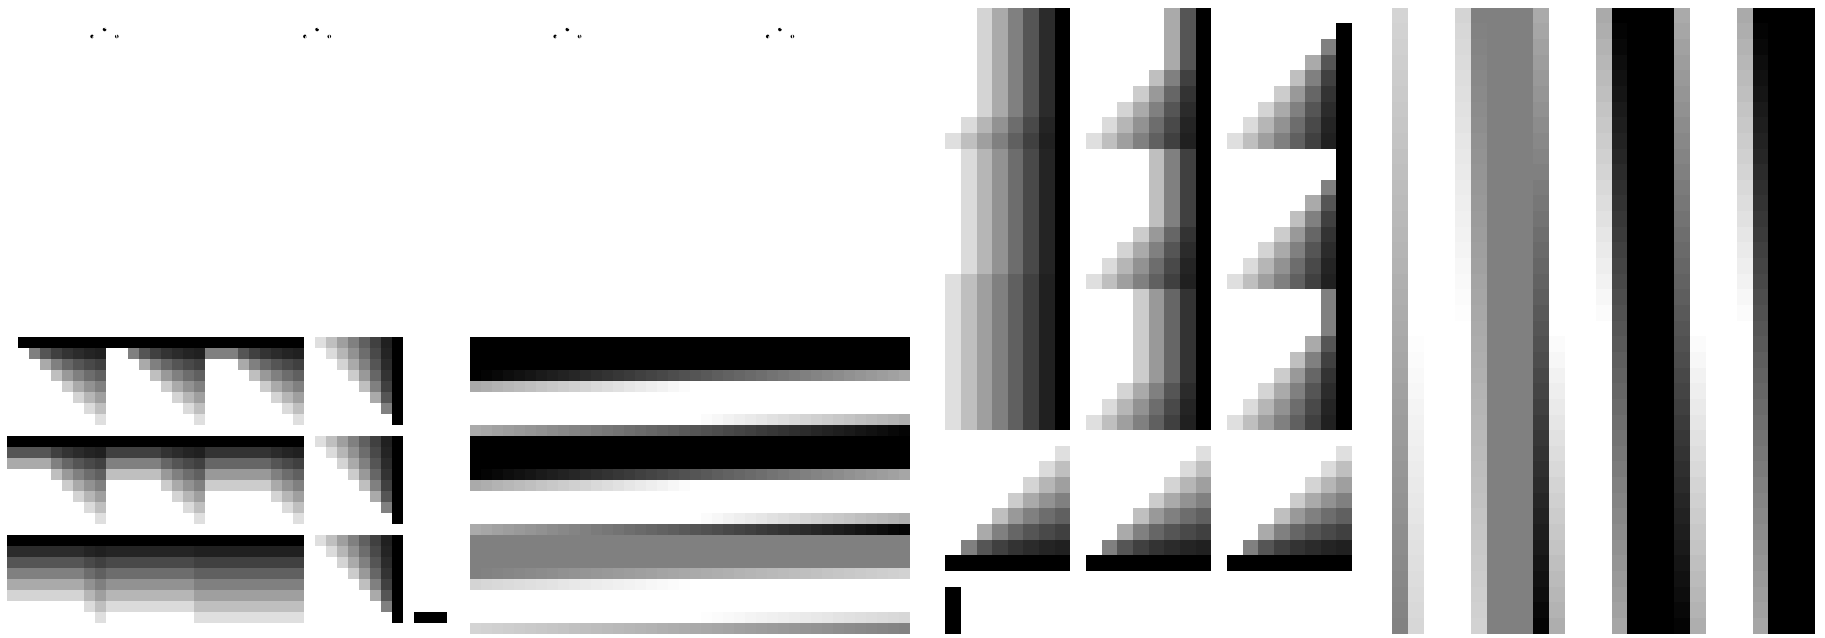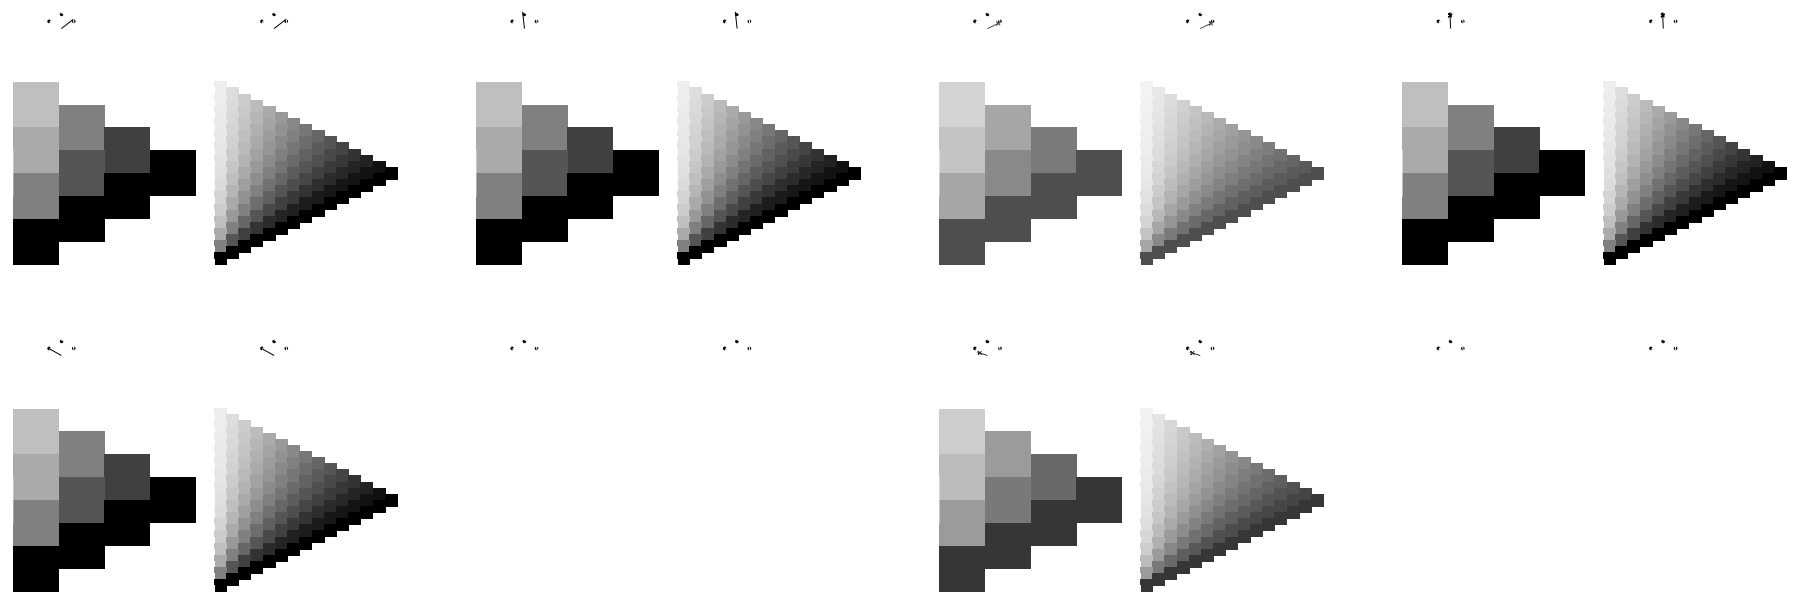


See for similar files: <http://www.ps.bam.de/XE30/>; [www.ps.bam.de/Version 2.1, io=1,1](http://www.ps.bam.de/Version%202.1,%20io%3D1,1)

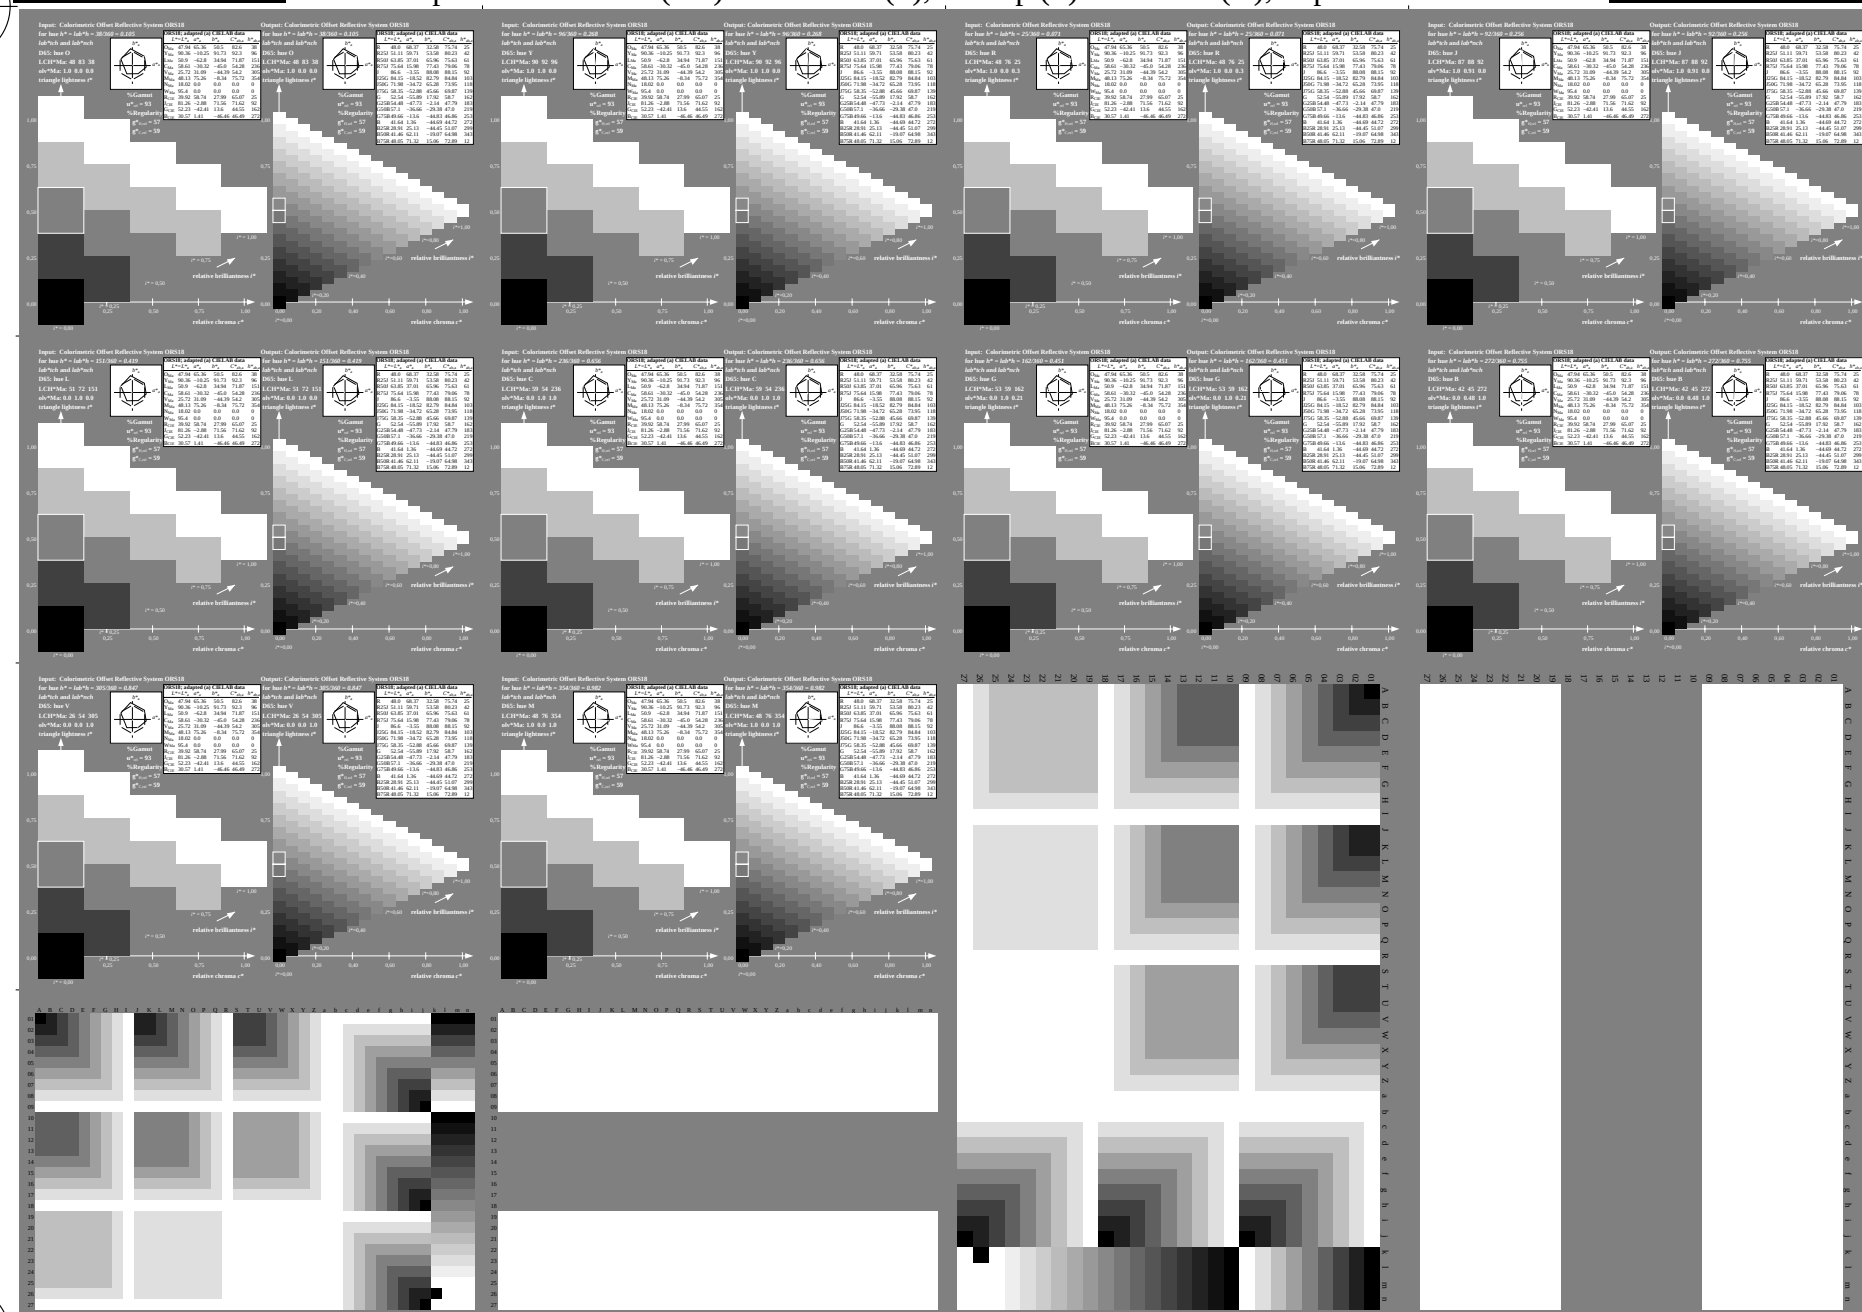

BAM registration: 20080101-XE30/10L/L30E00NP.PS/.PDF BAM material: code=rh4ta
application for evaluation and measurement of printer or monitor systems

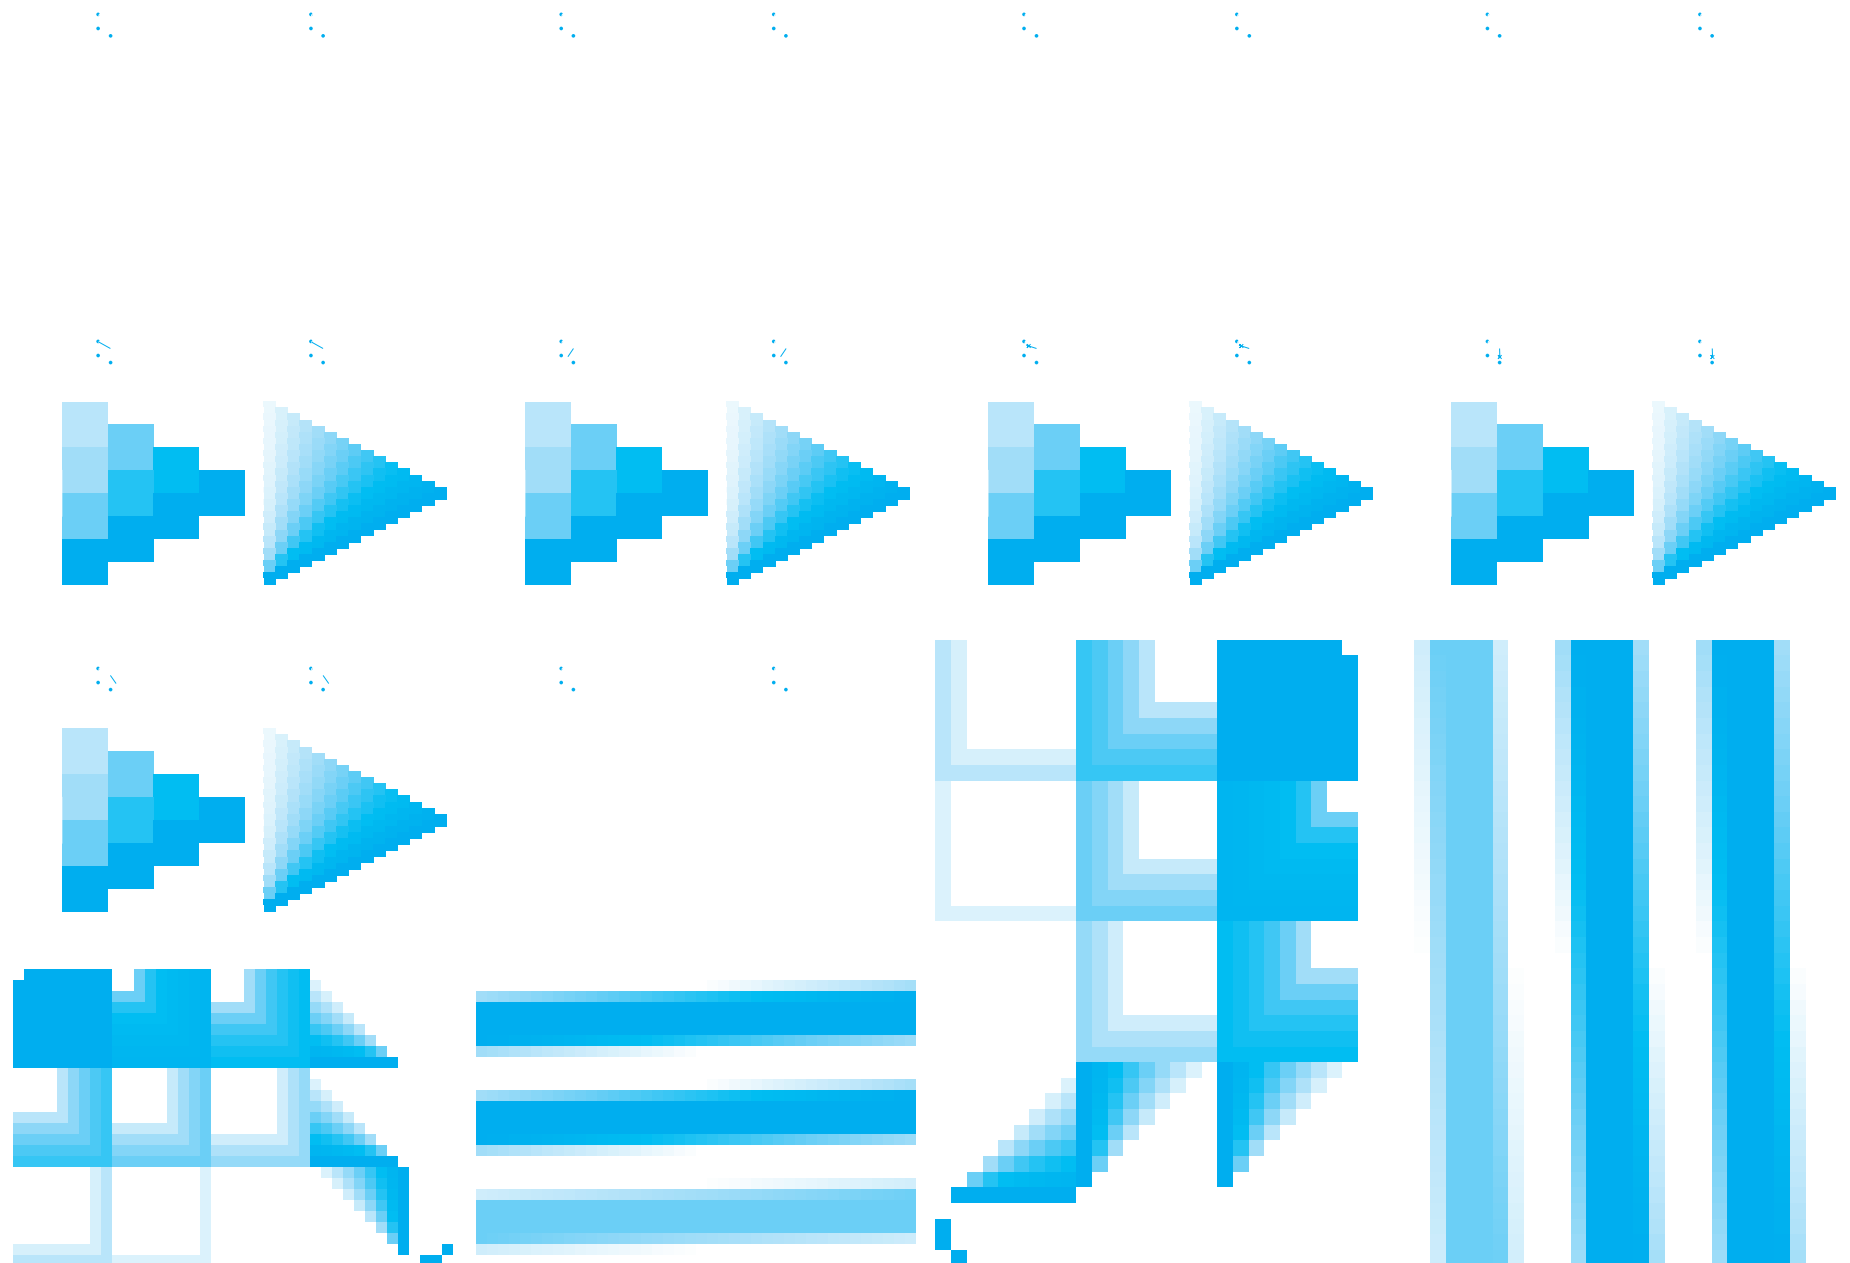

m

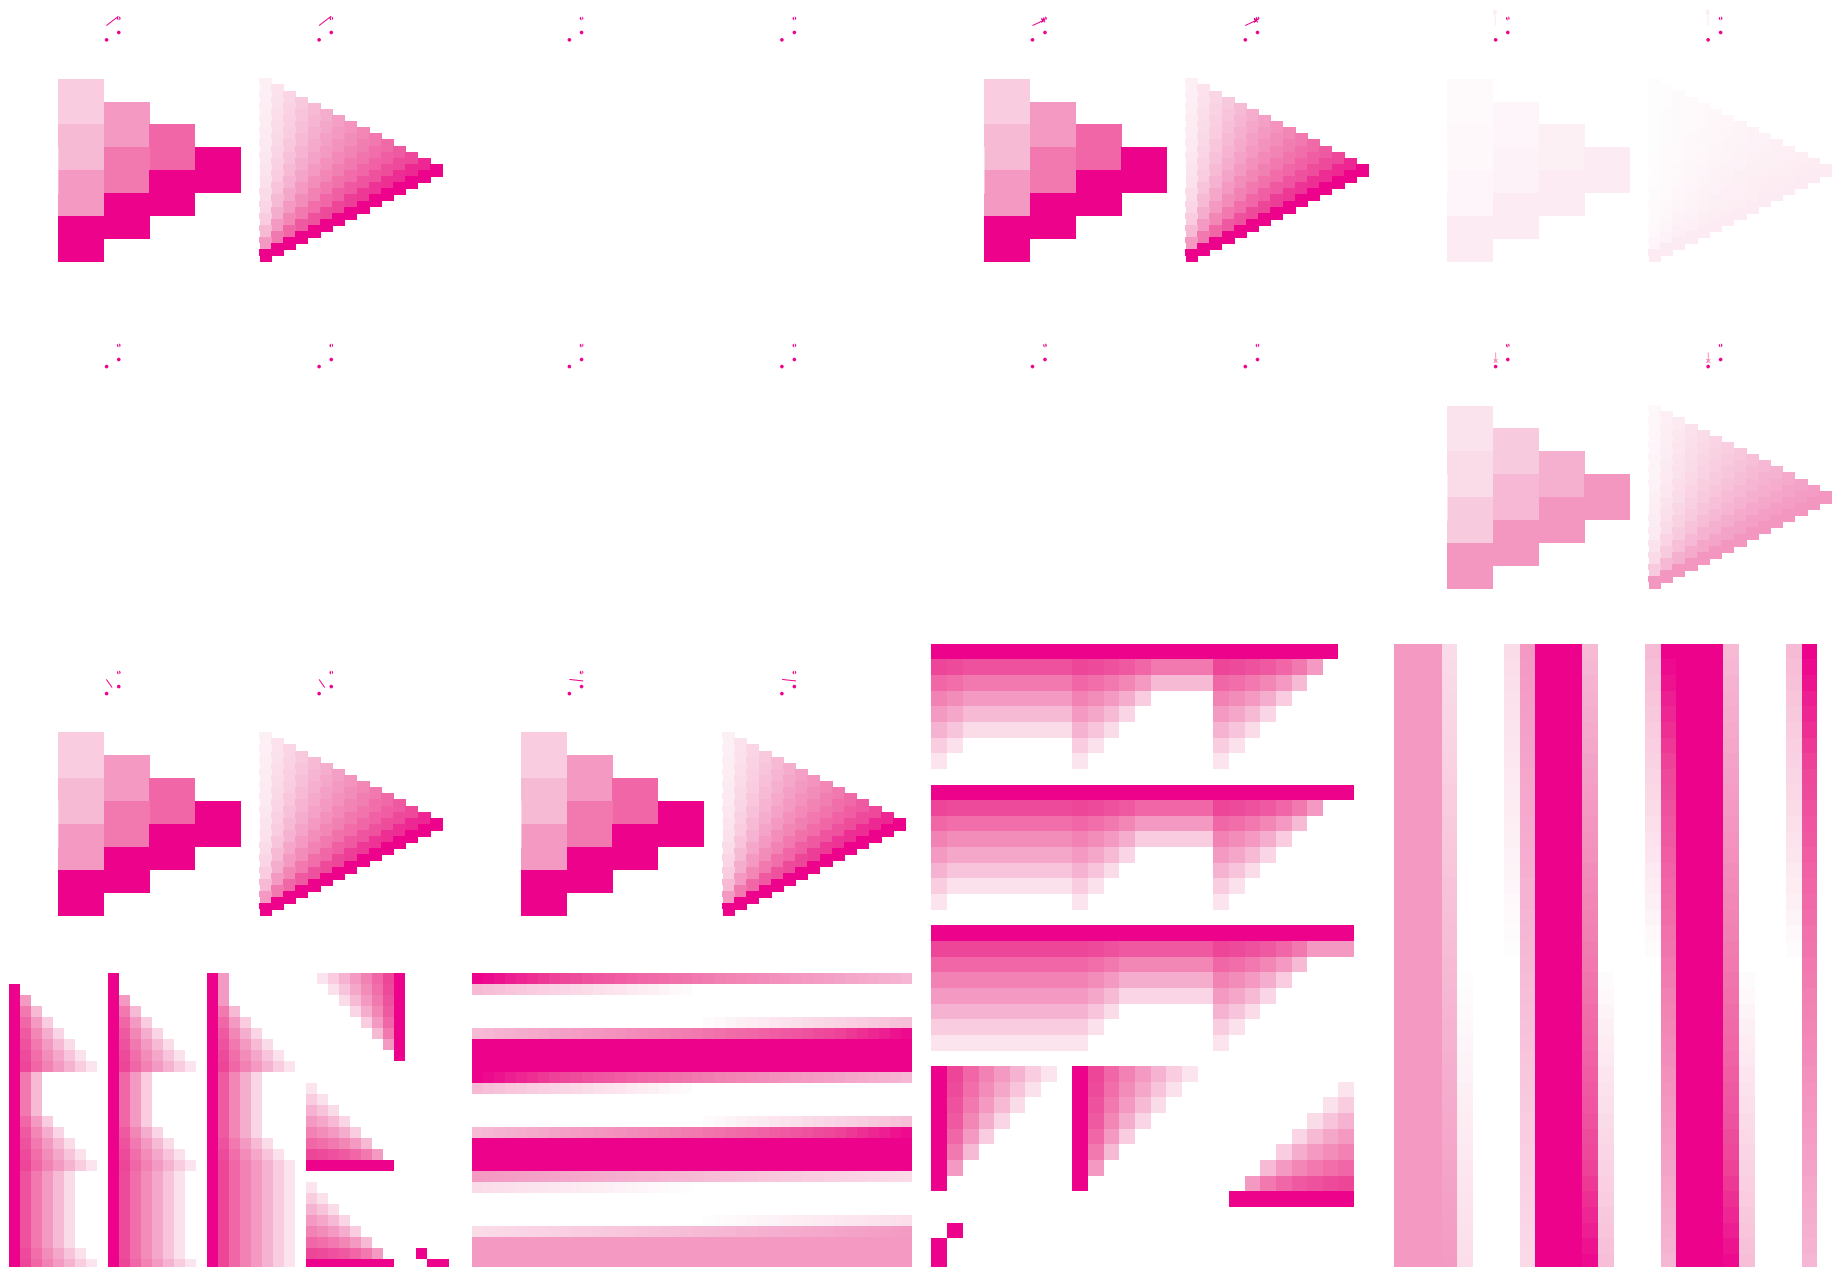

y

50°

50°

40°









40°

30°

30°

20°

20°



60°

60°

70°





70°

80°

80°

90°

90°



100°

100°

120°

120°

