


www.ps.bam.de/XE71/10L/L71E00NP.PS/.PDF; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

image pixel: 192 x 128
384 x 256
768 x 512
1536 x 1024
3072 x 2048



XE710-3, Picture B1: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 4 *colorimage*

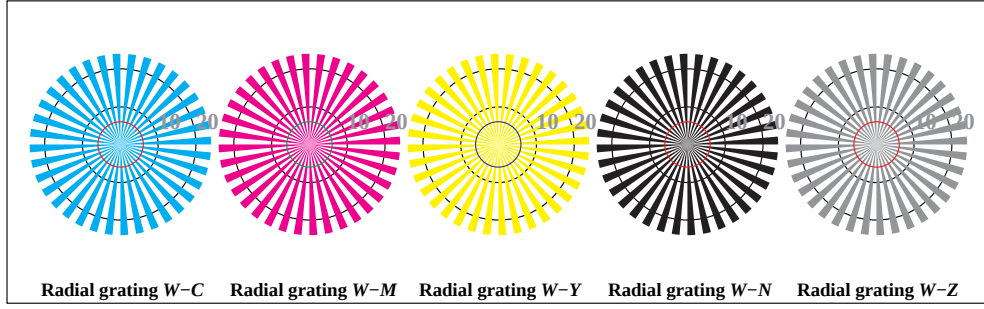


XE710-5, Picture B2: Radial gratings W-C, W-M, W-Y, W-N, and W-Z; PS operator *cmY0* / 000n* setcmYcolor*




XE710-7, Picture B3: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator *cmY0* / 000n* setcmYcolor*


BAM-test chart XE71; FRS06 & FRS06 ISO/IEC 15775 and input: *cmY0* / 000n* setcmYcolor*
Fig. B1 to B7 of ISO/IEC-test chart 2; ISO/IEC TR 24705; output: no change compared to input

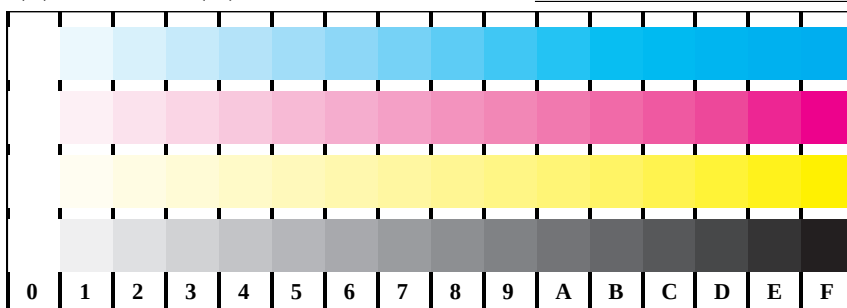


XE711-1, Picture B4: 16 equidistant steps W-C, W-M, W-Y and W-N; PS operator *cmY0* / 000n* setcmYcolor*

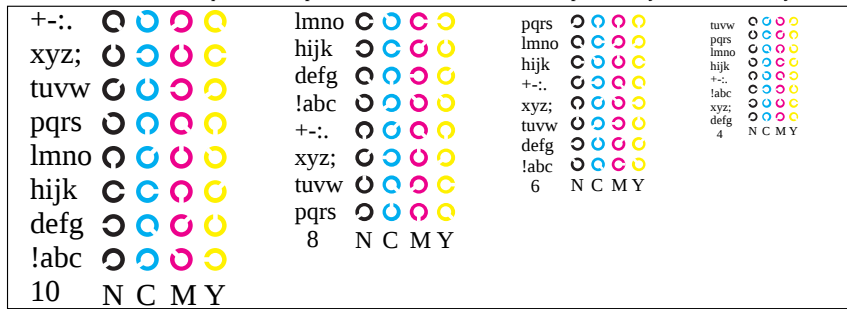

XE711-3, Picture B5: Script and Landolt-rings N, M, C and Y; Use of PS operator *cmY0* / 000n* setcmYcolor*

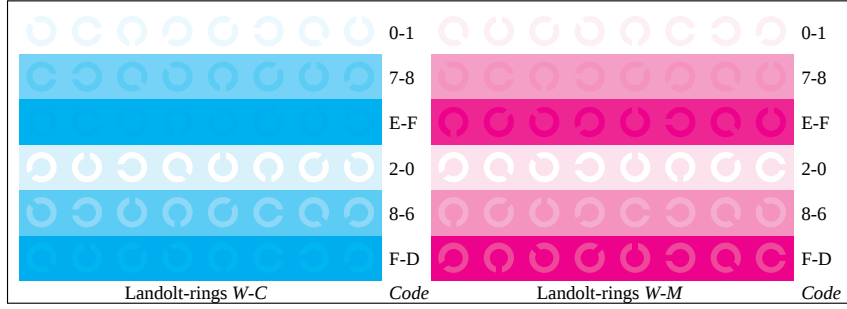

XE711-5, Picture B6: Landolt-rings W-C and W-M; Use of PS operator *cmY0* / 000n* setcmYcolor*

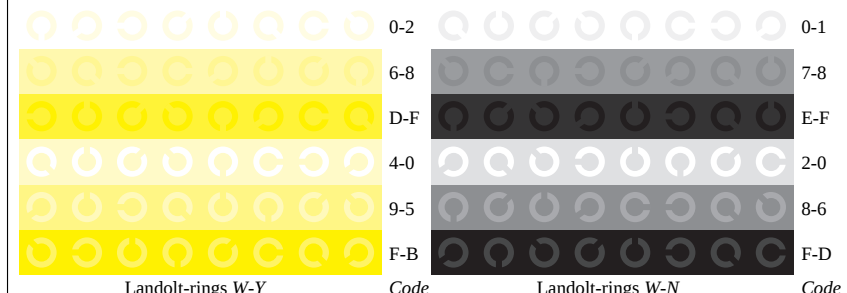

XE711-7, Picture B7: Landolt-rings W-Y and W-N; Use of PS operator *cmY0* / 000n* setcmYcolor*

BAM registration: 20061001-XE71/10L/L71E00NP.PS/.PDF
application for evaluation and measurement of printer or monitor systems

BAM material: code=rh4ta