

www.ps.bam.de/XE71/L71E00N1.PS.TXT; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

image pixel: 192 x 128

384 x 256

768 x 512

1536 x 1024

3072 x 2048



XE710-3, Picture B1: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sl); PS operators settransfer, 4 colorimage



Radial grating W-C Radial grating W-M Radial grating W-Y Radial grating W-N Radial grating W-Z


XE710-5, Picture B2: Radial gratings W-C, W-M, W-Y, W-N, and W-Z; PS operator cmy0* / 000n* setcmykcolor




XE710-7, Picture B3: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator cmy0* / 000n* setcmykcolor

BAM-test chart XE71; FRS06 & FRS06
Fig. B1 to B7 of ISO/IEC-test chart 2;


ISO/IEC 15775 and
ISO/IEC TR 24705;

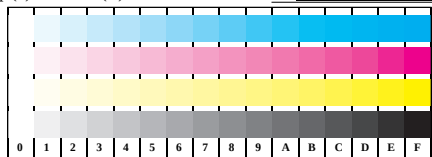


XE711-1, Picture B4: 16 equidistant steps W-C, W-M, W-Y and W-N; PS operator cmy0* / 000n* setcmykcolor

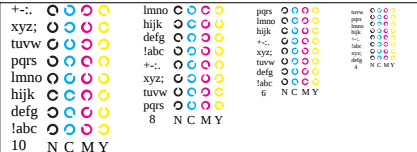

XE711-3, Picture B5: Script and Landolt-rings N, M, C and Y; Use of PS operator cmy0* / 000n* setcmykcolor

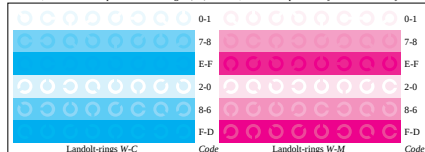

XE711-5, Picture B6: Landolt-rings W-C and W-M; Use of PS operator cmy0* / 000n* setcmykcolor

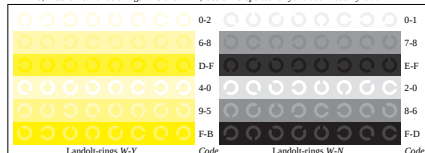

XE711-7, Picture B7: Landolt-rings W-Y and W-N; Use of PS operator cmy0* / 000n* setcmykcolor

input: cmy0* / 000n* setcmykcolor
output: no change compared to input