




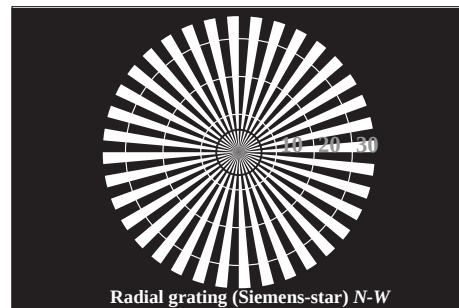


Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

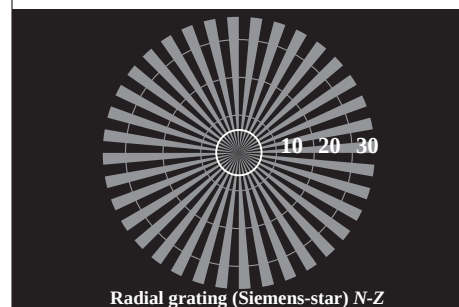


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

XE760-3, Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

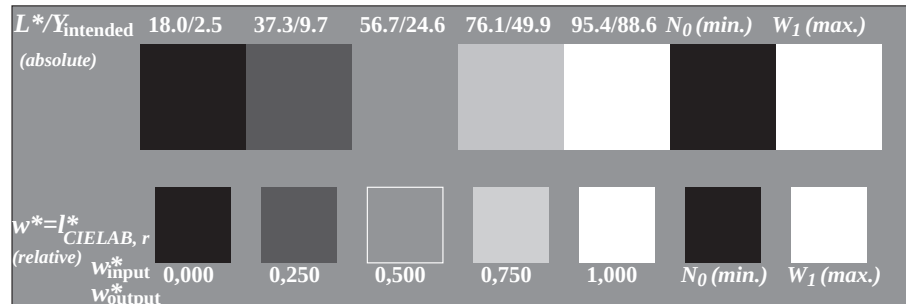

XE760-5, Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: 000n* setcmykcolor

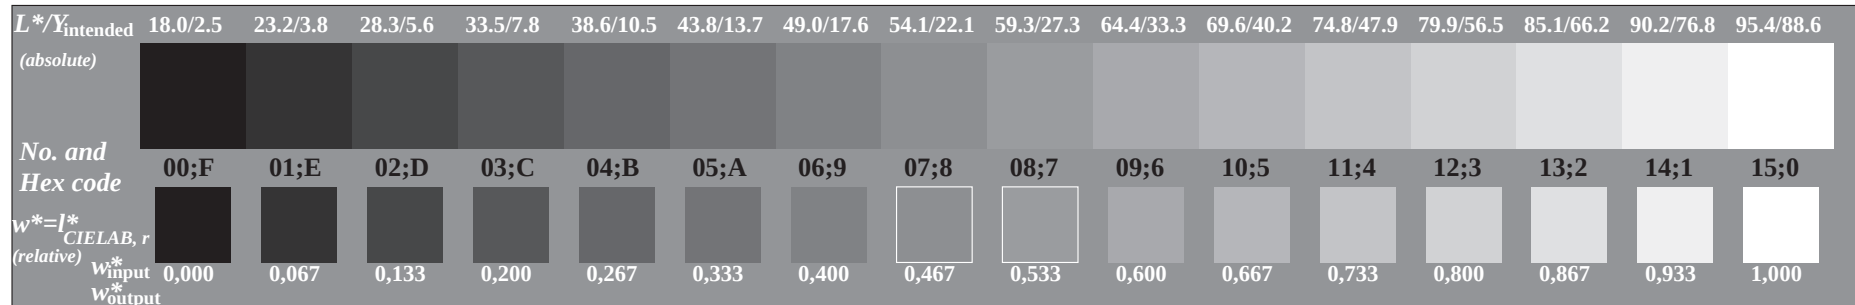

XE760-7, Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n* setcmykcolor

BAM-test chart XE76; FRS06 & FRS06
Fig. C1 to C6 of ISO/IEC-test chart 3;


ISO/IEC 15775 and input: 000n* setcmykcolor
ISO/IEC TR 24705; output: olv*' (TRI9) setrgbcolor

background step 0		1 ring step	0-1
Hex code		Hex code	
7		8	7-8
E		F	E-F
2		0	2-0
8		6	8-6
F		D	F-D

Landolt-rings W-N


code: background-ring

XE761-1, Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

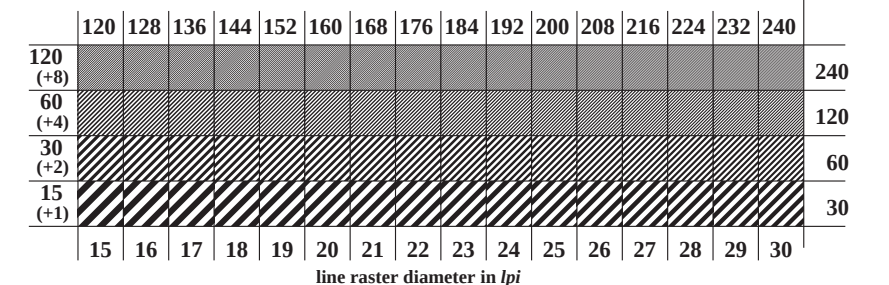

line raster diameter in lpi

XE761-3, Picture C5: Line raster under 45 (or 135); PS operator: 000n* setcmykcolor

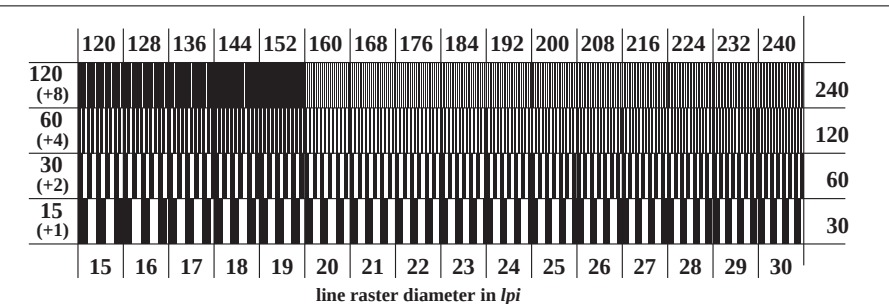

line raster diameter in lpi

XE761-5, Picture C6: Line raster under 90 (or 0); Use of the PS operator 000n* setcmykcolor

