




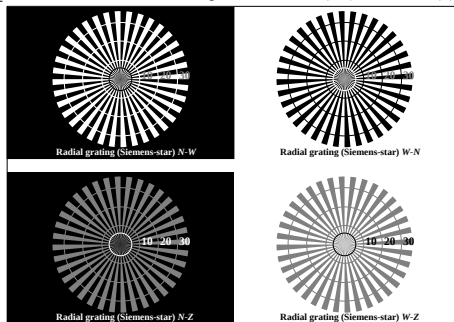

XE790-3, Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: `www* setrgbcolor`

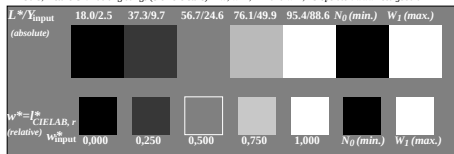

XE790-5, Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: `www* setrgbcolor`

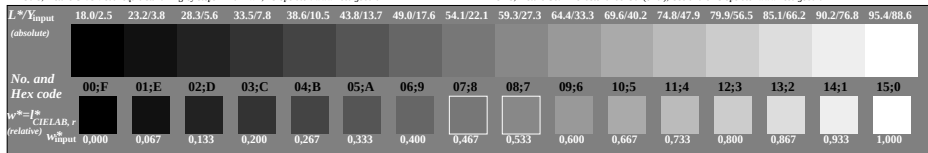


XE790-7, Picture C3: 16 visual equidistant L^* -grey steps; PS operator: `www* setrgbcolor`


BAM-test chart XE79; FRS06 & FRS06
Fig. C1 to C6 of ISO/IEC-test chart 3;

ISO/IEC 15775 and
ISO/IEC TR 24705;


input: `www* setrgbcolor`
output: no change compared to input

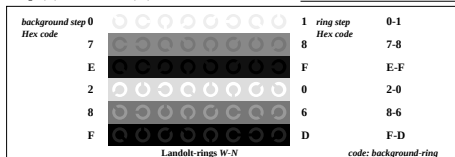

XE791-1, Picture C4: Landolt-rings W-N; PS operator: `www* setrgbcolor`

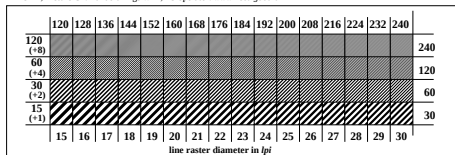

XE791-3, Picture C5: Line raster under 45 (or 135); PS operator: `www* setrgbcolor`

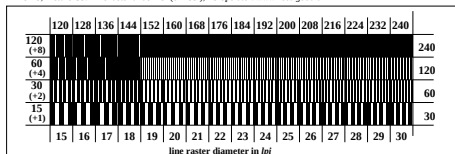

XE791-5, Picture C6: Line raster under 90 (or 0); Use of the PS operator `www* setrgbcolor`