


Start output S1															
Specification according to															
ISO/IEC 15775 Annex G															
and DIN 33866-1 Annex G															
relative CIELAB data used for "out"															
T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*								
O	1	35.9	60.7	44.5	36	35.9	60.7	44.5	36	0.0	0.0	0.0	0.0	0.0	0.0
	2	39.5	56.9	41.7	36	40.2	58.0	36.9	32	0.7	1.1	-4.7	4.9	5.0	
	3	43.0	53.1	39.0	36	45.1	53.5	29.9	29	2.1	0.4	-9.0	9.1	9.3	
	4	46.6	49.3	36.2	36	49.9	48.2	26.2	29	3.3	-1.0	-9.9	10.0	10.6	
	5	50.1	45.5	33.4	36	54.4	43.2	21.4	26	4.3	-2.2	-11.9	12.2	12.9	
	6	53.7	41.7	30.6	36	58.0	38.5	20.0	27	4.3	-3.1	-10.5	11.1	11.9	
	7	57.2	37.9	27.9	36	61.6	34.7	16.8	26	4.3	-3.1	-10.9	11.5	12.3	
	8	60.8	34.1	25.1	36	65.9	29.7	14.8	26	5.1	-4.3	-10.2	11.2	12.3	
	9	64.3	30.3	22.3	36	69.8	25.4	12.6	26	5.4	-4.8	-9.6	10.9	12.2	
	10	67.9	26.5	19.5	36	73.7	21.2	10.2	26	5.8	-5.2	-9.2	10.7	12.2	
	11	71.4	22.7	16.8	36	77.6	17.1	7.5	24	6.2	-5.5	-9.2	10.8	12.4	
	12	75.0	18.9	14.0	36	81.3	13.1	5.2	22	6.4	-5.7	-8.7	10.5	12.3	
	13	78.5	15.1	11.2	37	85.0	8.9	3.2	20	6.5	-6.1	-7.9	10.1	12.0	
	14	82.1	11.3	8.4	37	88.7	4.5	2.1	25	6.7	-6.7	-6.2	9.3	11.4	
	15	85.6	7.5	5.6	37	92.1	0.0	1.5	90	6.5	-7.4	-4.0	8.6	10.7	
	16	89.2	3.7	2.9	38	92.6	0.0	0.1	90	3.4	-3.6	-2.7	4.6	5.8	
	17	92.7	0.0	0.1	135	92.7	0.0	0.1	135	0.0	0.0	0.0	0.0	0.0	
	18	35.9	60.7	44.5	36	35.9	60.7	44.5	36	0.0	0.0	0.0	0.0	0.0	
	19	50.1	45.5	33.4	36	54.4	43.2	21.4	26	4.3	-2.2	-11.9	12.2	12.9	
	20	64.3	30.3	22.3	36	69.8	25.4	12.6	26	5.4	-4.8	-9.6	10.9	12.2	
	21	78.5	15.1	11.2	37	85.0	8.9	3.2	20	6.5	-6.1	-7.9	10.1	12.0	
	22	92.7	0.0	0.1	135	92.7	0.0	0.1	135	0.0	0.0	0.0	0.0	0.0	
Mean colour reproduction index:										R* _{ab,m} = 58					


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

Start output S1															
Specification according to															
ISO/IEC 15775 Annex G															
and DIN 33866-1 Annex G															
relative CIELAB data used for "out"															
T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*								
O	1	46.3	60.0	40.4	34	46.3	60.0	40.4	34	0.0	0.0	0.0	0.0	0.0	0.0
	2	49.4	56.3	37.9	34	46.3	60.2	39.3	33	-3.0	4.0	1.4	4.2	5.2	
	3	52.4	52.5	35.4	34	46.2	60.6	37.3	32	-6.2	8.1	1.9	8.3	10.4	
	4	55.5	48.8	32.8	34	47.1	60.0	34.0	30	-8.3	11.3	1.2	11.3	14.1	
	5	58.6	45.0	30.3	34	48.6	58.4	30.4	27	-9.9	13.4	0.1	13.4	16.7	
	6	61.7	41.3	27.8	34	50.7	55.6	26.0	25	-10.8	14.3	-1.7	14.5	18.1	
	7	64.7	37.5	25.3	34	53.3	51.8	22.8	24	-11.3	14.3	-2.4	14.5	18.5	
	8	67.8	33.8	22.7	34	56.9	46.7	20.7	24	-10.8	13.0	-1.9	13.1	17.1	
	9	70.9	30.0	20.2	34	60.7	41.1	18.9	25	-10.1	11.1	-1.2	11.2	15.1	
	10	73.9	26.3	17.7	34	64.9	34.8	17.4	27	-8.9	8.5	-0.2	8.6	12.4	
	11	77.0	22.5	15.2	34	70.6	27.0	14.4	28	-6.3	4.5	-0.7	4.6	7.9	
	12	80.1	18.8	12.6	34	75.6	21.2	10.6	27	-4.4	2.5	-1.9	3.2	5.5	
	13	83.1	15.0	10.1	34	80.1	15.9	8.3	28	-2.9	0.9	-1.7	2.0	3.6	
	14	86.2	11.3	7.6	34	84.1	11.4	6.3	29	-2.0	0.1	-1.2	1.3	2.4	
	15	89.3	7.5	5.0	34	88.4	6.7	4.0	31	-0.8	-0.7	-0.9	1.3	1.6	
	16	92.3	3.8	2.5	34	90.0	3.2	1.9	31	-2.3	-0.4	-0.5	0.8	2.5	
	17	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	
	18	46.3	60.0	40.4	34	46.3	60.0	40.4	34	0.0	0.0	0.0	0.0	0.0	
	19	58.6	45.0	30.3	34	48.6	58.4	30.4	27	-9.9	13.4	0.1	13.4	16.7	
	20	70.9	30.0	20.2	34	60.7	41.1	18.9	25	-10.1	11.1	-1.2	11.2	15.1	
	21	83.1	15.0	10.1	34	80.1	15.9	8.3	28	-2.9	0.9	-1.7	2.0	3.6	
	22	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	
Mean colour reproduction index:										R* _{ab,m} = 61					

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

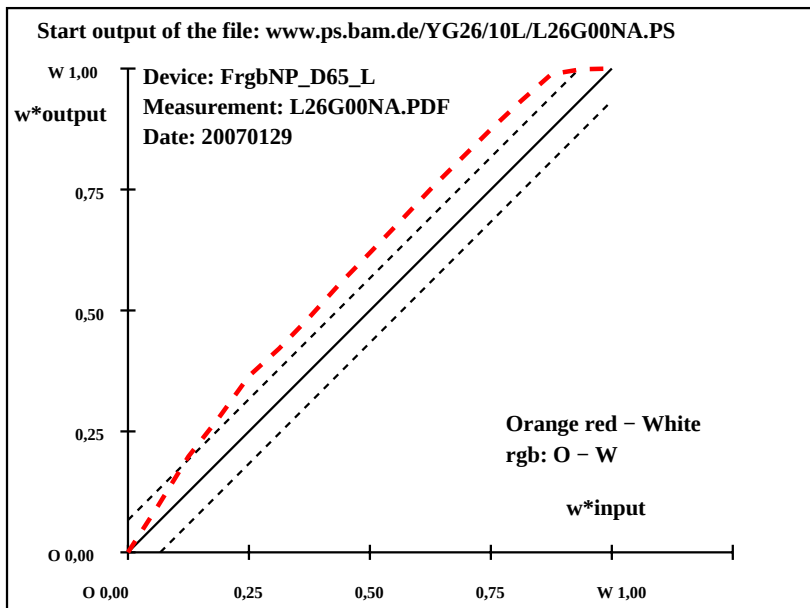

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

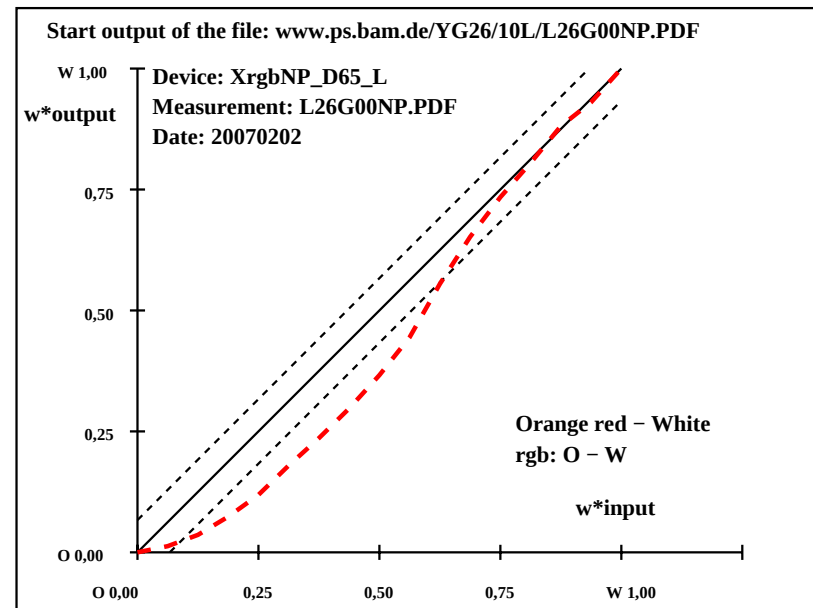

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	84.3	-4.1	110.2	92	84.3	-4.1	110.2	92
	2	84.8	-3.8	103.3	92	85.7	-5.9	98.1	93
	3	85.3	-3.6	96.4	92	86.8	-7.5	85.9	95
	4	85.8	-3.3	89.5	92	87.5	-8.3	77.2	96
	5	86.3	-3.0	82.6	92	88.2	-8.6	67.4	97
	6	86.9	-2.8	75.8	92	88.5	-8.6	61.7	98
	7	87.4	-2.5	68.9	92	89.0	-8.5	54.3	99
	8	87.9	-2.3	62.0	92	89.5	-8.1	46.9	100
	9	88.4	-2.0	55.1	92	90.1	-7.8	40.1	101
	10	88.9	-1.7	48.2	92	90.5	-6.9	33.3	102
	11	89.5	-1.5	41.3	92	91.0	-6.0	25.6	103
	12	90.0	-1.2	34.4	92	91.5	-4.7	18.6	104
	13	90.5	-1.0	27.6	92	91.9	-3.2	12.0	105
	14	91.0	-0.7	20.7	92	92.2	-1.8	6.5	106
	15	91.5	-0.4	13.8	92	92.5	-0.6	2.0	109
	16	92.1	-0.2	6.9	92	92.6	0.0	0.1	90
W	17	92.6	0.0	0.0	0	92.6	0.0	0.0	0
Y	18	84.3	-4.1	110.2	92	84.3	-4.1	110.2	92
	19	86.3	-3.0	82.6	92	88.2	-8.6	67.4	97
	20	88.4	-2.0	55.1	92	90.1	-7.8	40.1	101
	21	90.5	-1.0	27.6	92	91.9	-3.2	12.0	105
W	22	92.6	0.0	0.0	0	92.6	0.0	0.0	0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.58 - 84.27$
Regularity
 $g^* = 18.5$
Lightness gamut relative to offset
 $f^* = 10.7$
Yellow - White
rgb: Y - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 12.1$
 $\Delta E^*_{CIELAB} = 12.2$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 9.6$
 $\Delta E^*_{CIELAB} = 9.7$
Mean colour reproduction index: $R^*_{ab,m} = 47$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	90.9	-16.9	112.4	99	90.9	-16.9	112.4	99
	2	91.2	-15.8	105.4	99	90.8	-16.9	112.7	99
	3	91.5	-14.8	98.4	99	90.8	-16.8	112.6	99
	4	91.7	-13.7	91.3	99	90.9	-16.8	111.9	99
	5	92.0	-12.7	84.3	99	91.0	-17.0	108.7	99
	6	92.3	-11.6	77.3	99	91.1	-17.1	105.1	99
	7	92.6	-10.6	70.3	99	91.1	-17.2	99.2	100
	8	92.9	-9.5	63.2	99	91.5	-16.9	89.7	101
	9	93.2	-8.5	56.2	99	91.9	-16.0	75.8	102
	10	93.4	-7.4	49.2	99	92.3	-15.1	66.4	103
	11	93.7	-6.3	42.2	99	92.6	-13.9	57.1	104
	12	94.0	-5.3	35.1	99	93.0	-12.7	48.1	105
	13	94.3	-4.2	28.1	99	93.3	-11.5	41.2	106
	14	94.6	-3.2	21.1	99	93.9	-8.9	29.4	107
	15	94.9	-2.1	14.1	99	94.4	-6.2	19.0	108
	16	95.1	-1.1	7.0	99	95.0	-3.2	9.0	110
W	17	95.4	0.0	0.0	180	95.4	0.0	0.0	180
Y	18	90.9	-16.9	112.4	99	90.9	-16.9	112.4	99
	19	92.0	-12.7	84.3	99	91.0	-17.0	108.7	99
	20	93.2	-8.5	56.2	99	91.9	-16.0	75.8	102
	21	94.3	-4.2	28.1	99	93.3	-11.5	41.2	106
W	22	95.4	0.0	0.0	180	95.4	0.0	0.0	180

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.43 - 90.9$
Regularity
 $g^* = 3.8$
Lightness gamut relative to offset
 $f^* = 5.9$
Yellow - White
rgb: Y - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 15.2$
 $\Delta E^*_{CIELAB} = 15.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 12.2$
 $\Delta E^*_{CIELAB} = 12.2$
Mean colour reproduction index: $R^*_{ab,m} = 33$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

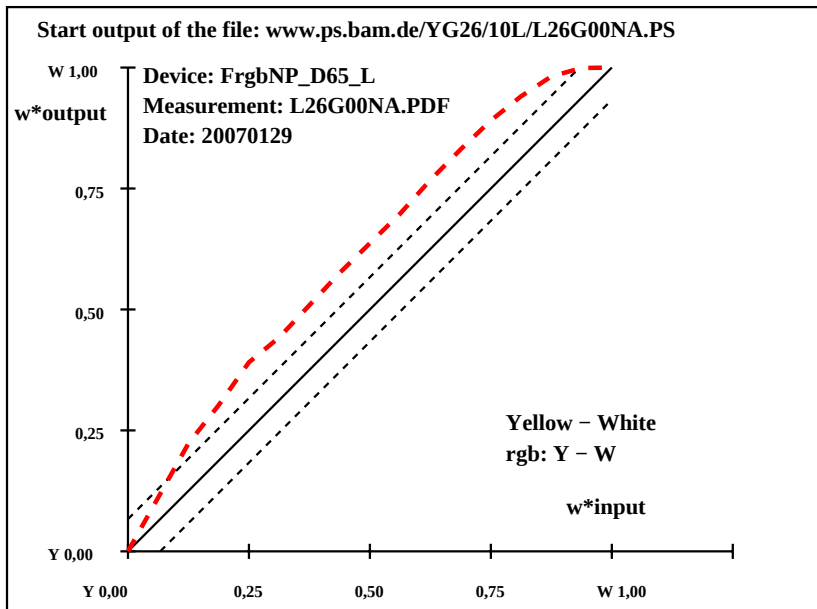

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

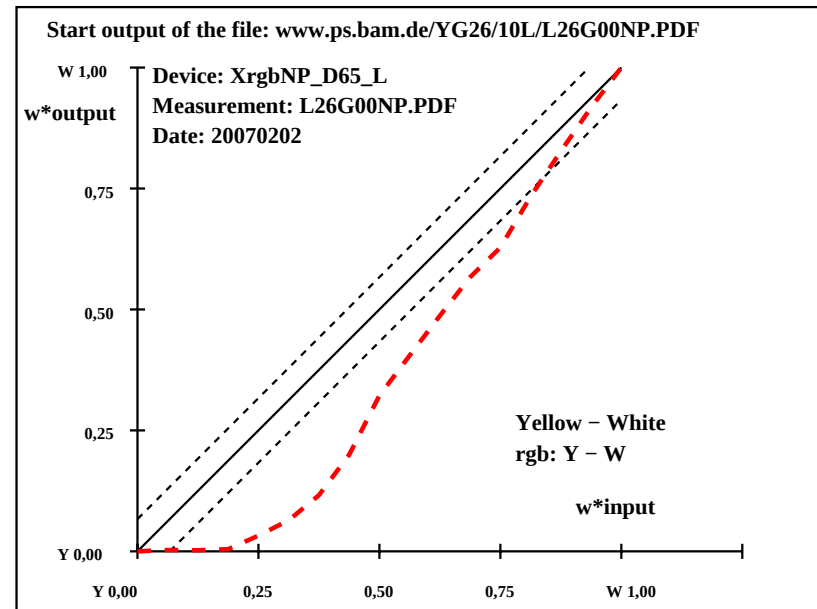


YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1												
L	1	44.0	-61.7	48.5	142	44.0	-61.7	48.5	142	0.0	0.0	0.0	0.0	0.0	Specification according to						
	2	47.1	-57.8	45.5	142	48.8	-60.2	44.6	144	1.8	-2.3	-0.8	2.5	3.1	ISO/IEC 15775 Annex G						
	3	50.1	-54.0	42.4	142	53.5	-57.4	39.7	145	3.3	-3.3	-2.6	4.4	5.5	and DIN 33866-1 Annex G						
	4	53.2	-50.1	39.4	142	57.6	-54.0	37.0	146	4.4	-3.8	-2.3	4.6	6.4	relative CIELAB data used for "out"						
	5	56.2	-46.3	36.4	142	61.8	-49.6	33.0	146	5.6	-3.3	-3.3	4.8	7.4	$\Delta L^* = 92.64 - 44.04$						
	6	59.2	-42.4	33.3	142	65.0	-46.0	31.7	145	5.8	-3.5	-1.5	4.0	7.0	Regularity						
	7	62.3	-38.5	30.3	142	68.1	-42.2	27.8	147	5.8	-3.6	-2.4	4.5	7.3	$g^* = 27.4$						
	8	65.3	-34.7	27.3	142	71.1	-38.3	24.0	148	5.8	-3.5	-3.2	4.9	7.6							
	9	68.3	-30.8	24.3	142	74.1	-34.4	20.7	149	5.7	-3.5	-3.4	5.1	7.6	Lightness gamut relative to offset						
	10	71.4	-26.9	21.2	142	77.6	-29.4	16.9	150	6.2	-2.4	-4.2	5.0	7.9	$f^* = 62.8$						
11	74.4	-23.1	18.2	142	81.2	-24.1	13.7	150	6.8	-0.9	-4.4	4.6	8.2								
12	77.5	-19.2	15.2	142	84.7	-18.2	10.0	151	7.2	1.0	-5.1	5.3	8.9	Leaf green – White							
13	80.5	-15.4	12.1	142	87.8	-12.1	6.8	151	7.3	3.3	-5.2	6.2	9.6	rgb: L – W							
14	83.5	-11.5	9.1	142	90.4	-6.3	4.1	147	6.8	5.2	-4.9	7.2	9.9								
15	86.6	-7.6	6.1	142	92.3	-1.3	1.6	131	5.7	6.3	-4.4	7.7	9.6	Mean CIELAB difference (17 steps)							
16	89.6	-3.8	3.0	142	92.6	0.0	0.0	0	3.0	3.9	-2.9	4.9	5.8	$\Delta H^{*CIELAB} = 4.4$							
17	92.6	0.0	0.0	0	92.6	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	$\Delta E^{*CIELAB} = 6.6$							
W	18	44.0	-61.7	48.5	142	44.0	-61.7	48.5	142	0.0	0.0	0.0	0.0	0.0							
	19	56.2	-46.3	36.4	142	61.8	-49.6	33.0	146	5.6	-3.3	-3.3	4.8	7.4							
	20	68.3	-30.8	24.3	142	74.1	-34.4	20.7	149	5.7	-3.5	-3.4	5.1	7.6	Mean CIELAB difference (5 steps)						
L	21	80.5	-15.4	12.1	142	87.8	-12.1	6.8	151	7.3	3.3	-5.2	6.2	9.6	$\Delta H^{*CIELAB} = 3.2$						
	22	92.6	0.0	0.0	0	92.6	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	$\Delta E^{*CIELAB} = 4.9$						
Mean colour reproduction index:										$R^*_{ab,m} = 71$											


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1																			
L	1	45.7	-67.4	36.2	152	45.7	-67.4	36.2	152	0.0	0.0	0.0	0.0	0.0	Specification according to													
	2	48.8	-63.2	33.9	152	45.3	-66.7	36.0	152	-3.4	-3.4	2.1	4.1	5.4	ISO/IEC 15775 Annex G													
	3	51.9	-59.0	31.7	152	45.5	-66.5	36.6	151	-6.3	-7.4	4.9	9.0	11.1	and DIN 33866-1 Annex G													
	4	55.0	-54.7	29.4	152	45.6	-66.1	36.6	151	-9.4	-11.3	7.2	13.4	16.4	relative CIELAB data used for "out"													
	5	58.2	-50.5	27.2	152	45.8	-65.0	37.3	150	-12.2	-14.4	10.1	17.7	21.5	$\Delta L^* = 95.52 - 45.71$													
	6	61.3	-46.3	24.9	152	45.7	-65.3	37.2	150	-15.4	-18.9	12.3	22.6	27.4	Regularity													
	7	64.4	-42.1	22.7	152	47.4	-63.4	38.4	149	-16.9	-21.2	15.7	26.5	31.5	$g^* = 0.6$													
	8	67.5	-37.9	20.4	152	49.9	-60.0	38.8	147	-17.5	-22.0	18.4	28.8	33.7	Lightness gamut relative to offset													
	9	70.6	-33.7	18.2	152	53.0	-55.8	36.0	147	-17.5	-22.1	17.9	28.4	33.4								$f^* = 64.4$						
	10	73.7	-29.4	15.9	152	57.2	-49.9	28.9	150	-16.4	-20.4	13.0	24.3	29.4														
11	76.8	-25.2	13.6	152	62.1	-42.0	22.3	152	-14.6	-16.7	8.7	18.9	24.0	Leaf green – White														
12	80.0	-21.0	11.4	152	67.6	-35.2	20.9	149	-12.3	-14.1	9.5	17.1	21.1								rgb: L – W							
13	83.1	-16.8	9.1	152	74.0	-27.6	20.2	144	-8.9	-10.7	11.1	15.5	17.9															
14	86.2	-12.6	6.9	152	80.4	-21.0	19.7	137	-5.7	-8.3	12.8	15.4	16.4	Mean CIELAB difference (17 steps)														
15	89.3	-8.3	4.6	151	85.8	-14.1	12.7	138	-3.4	-5.7	8.1	9.9	10.5								$\Delta H^*_{CIELAB} = 15.0$							
16	92.4	-4.1	2.4	151	90.6	-7.1	5.2	144	-1.7	-2.9	2.8	4.1	4.5								$\Delta E^*_{CIELAB} = 17.9$							
W	17	95.5	0.0	0.1	90	95.5	0.0	0.1	90	0.0	0.0	0.0	0.0	0.0	Mean CIELAB difference (5 steps)													
L	18	45.7	-67.4	36.2	152	45.7	-67.4	36.2	152	0.0	0.0	0.0	0.0	0.0														
	19	58.2	-50.5	27.2	152	45.8	-65.0	37.3	150	-12.2	-14.4	10.1	17.7	21.5														
	20	70.6	-33.7	18.2	152	53.0	-55.8	36.0	147	-17.5	-22.1	17.9	28.4	33.4														
21	83.1	-16.8	9.1	152	74.0	-27.6	20.2	144	-8.9	-10.7	11.1	15.5	17.9	$\Delta H^*_{CIELAB} = 12.3$														
W	22	95.5	0.0	0.1	90	95.5	0.0	0.1	90	0.0	0.0	0.0	0.0								0.0	$\Delta E^*_{CIELAB} = 14.6$						
Mean colour reproduction index:										$R^*_{ab,m} = 21$																		

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

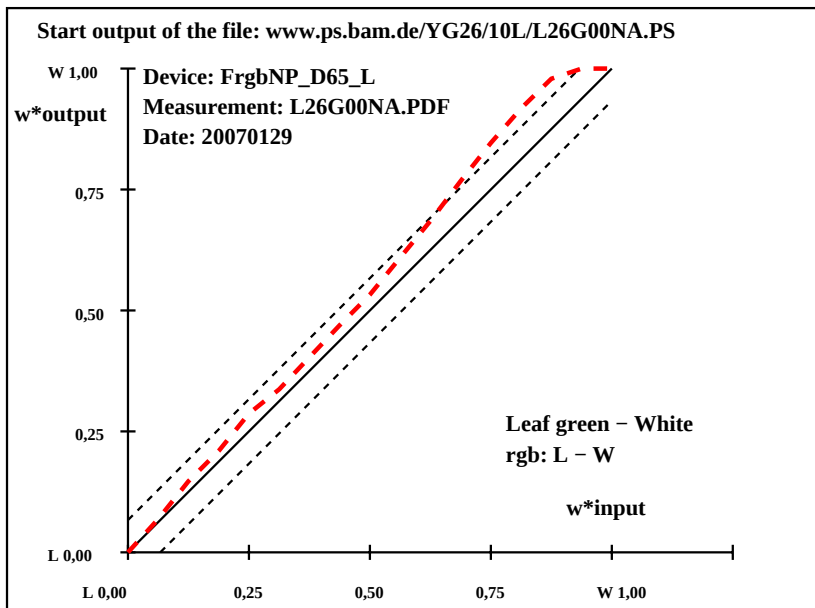

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

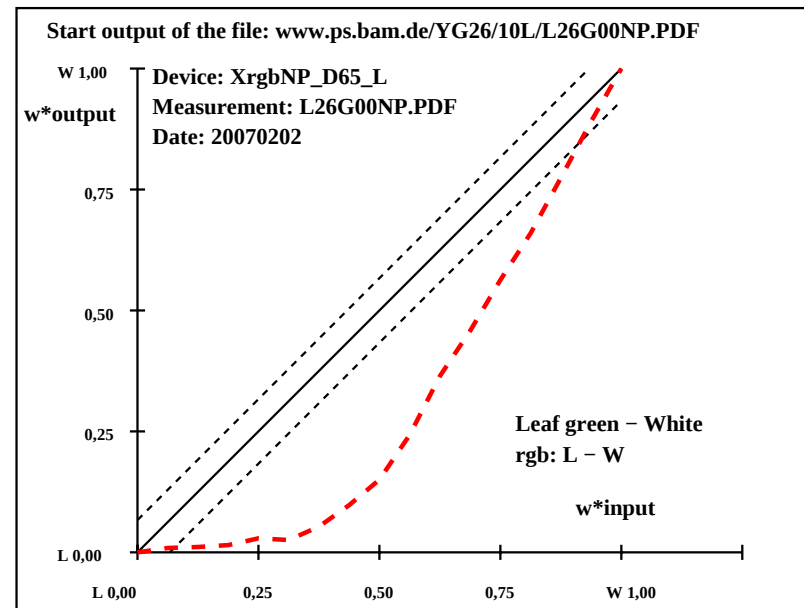

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start output S1
C	1	53.7-28.9-31.6	228	53.7-28.9-31.6	228	0.0	0.0	0.0
	2	56.2-27.1-29.6	228	57.8-29.4-29.9	225	1.6	-2.2	0.2
	3	58.6-25.3-27.6	228	61.5-29.2-28.0	224	2.9	-3.8	-0.3
	4	61.0-23.5-25.7	228	64.8-28.4-26.0	222	3.7	-4.8	-0.2
	5	63.5-21.7-23.7	228	67.9-27.1-23.8	221	4.4	-5.4	0.0
	6	65.9-19.8-21.7	228	70.7-25.7-21.9	220	4.8	-5.8	-0.1
	7	68.3-18.0-19.7	228	73.0-24.0-20.1	220	4.7	-5.9	-0.3
	8	70.7-16.2-17.7	228	75.5-22.4-18.0	219	4.7	-6.1	-0.2
	9	73.2-14.4-15.8	228	77.9-20.5-15.9	218	4.8	-6.0	0.0
	10	75.6-12.6-13.8	228	80.6-18.0-13.5	217	5.0	-5.3	0.3
	11	78.0-10.8-11.8	228	83.4-15.2-10.7	215	5.4	-4.3	1.1
	12	80.5-9.0-9.8	228	86.1-12.0-7.9	213	5.7	-2.9	1.9
	13	82.9-7.2-7.8	228	88.7-8.0-4.9	212	5.8	-0.8	2.9
	14	85.3-5.3-5.8	228	90.8-4.0-2.3	210	5.5	1.3	3.5
	15	87.8-3.5-3.9	228	92.5-0.6-0.1	196	4.7	2.9	3.8
	16	90.2-1.7-1.9	228	92.5	0.0	0.0	0.0	0.0
W	17	92.6	0.0	0.0	0.0	0.0	0.0	0.0
C	18	53.7-28.9-31.6	228	53.7-28.9-31.6	228	0.0	0.0	0.0
	19	63.5-21.7-23.7	228	67.9-27.1-23.8	221	4.4	-5.4	0.0
	20	73.2-14.4-15.8	228	77.9-20.5-15.9	218	4.8	-6.0	0.0
	21	82.9-7.2-7.8	228	88.7-8.0-4.9	212	5.8	-0.8	2.9
W	22	92.6	0.0	0.0	0.0	0.0	0.0	0.0

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"

$\Delta L^* = 92.62 - 53.73$
Regularity
 $g^* = 27.5$

Lightness gamut relative to offset
 $f^* = 50.2$

Cyan blue - White
rgb: C - W

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 4.0$
 $\Delta E^*_{CIELAB} = 5.7$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.9$
 $\Delta E^*_{CIELAB} = 4.3$

Mean colour reproduction index: $R^*_{ab,m} = 75$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start output S1
C	1	51.2-15.7-52.5	253	51.2-15.7-52.5	253	0.0	0.0	0.0
	2	53.9-14.7-49.2	253	51.0-15.5-52.8	254	-2.8	-0.7	-3.5
	3	56.7-13.7-45.9	253	50.8-15.2-52.8	254	-5.8	-1.4	-6.8
	4	59.5-12.7-42.7	253	51.1-15.3-52.7	254	-8.3	-2.5	-9.9
	5	62.2-11.8-39.4	253	51.7-15.6-52.4	253	-10.4	-3.7	-12.9
	6	65.0-10.8-36.1	253	52.7-16.2-51.3	252	-12.2	-5.3	-15.1
	7	67.7-9.8-32.8	253	55.1-16.2-48.9	252	-12.5	-6.3	-16.0
	8	70.5-8.8-29.5	253	57.0-16.3-45.4	250	-13.4	-7.4	-15.8
	9	73.3-7.8-26.3	253	58.6-15.8-40.9	249	-14.6	-7.9	-14.6
	10	76.0-6.8-23.0	253	60.9-15.4-36.7	247	-15.0	-8.5	-13.6
	11	78.8-5.8-19.7	253	64.9-13.8-30.9	246	-13.8	-7.9	-11.1
	12	81.6-4.8-16.4	253	68.6-12.1-26.3	245	-12.9	-7.2	-9.8
	13	84.3-3.9-13.1	253	74.3-10.3-21.2	244	-9.9	-6.4	-8.0
	14	87.1-2.9-9.8	253	81.0-8.3-15.4	242	-6.0	-5.3	-5.5
	15	89.9-1.9-6.6	253	87.0-5.8-9.9	239	-2.7	-3.8	-3.2
	16	92.6-0.9-3.3	254	91.1-3.2-5.5	239	-1.5	-2.2	-2.1
W	17	95.4	0.0	0.0	0.0	0.0	0.0	0.0
C	18	51.2-15.7-52.5	253	51.2-15.7-52.5	253	0.0	0.0	0.0
	19	62.2-11.8-39.4	253	51.7-15.6-52.4	253	-10.4	-3.7	-12.9
	20	73.3-7.8-26.3	253	58.6-15.8-40.9	249	-14.6	-7.9	-14.6
	21	84.3-3.9-13.1	253	74.3-10.3-21.2	244	-9.9	-6.4	-8.0
W	22	95.4	0.0	0.0	0.0	0.0	0.0	0.0

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"

$\Delta L^* = 95.39 - 51.16$
Regularity
 $g^* = 2.5$

Lightness gamut relative to offset
 $f^* = 57.1$


Cyan blue - White
rgb: C - W

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 10.1$
 $\Delta E^*_{CIELAB} = 13.2$


Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 8.1$
 $\Delta E^*_{CIELAB} = 10.8$

Mean colour reproduction index: $R^*_{ab,m} = 42$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

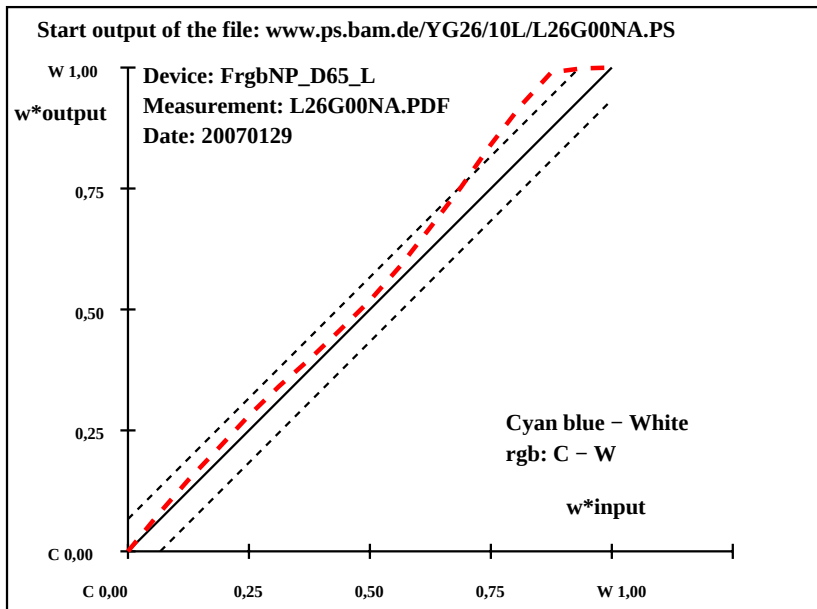

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

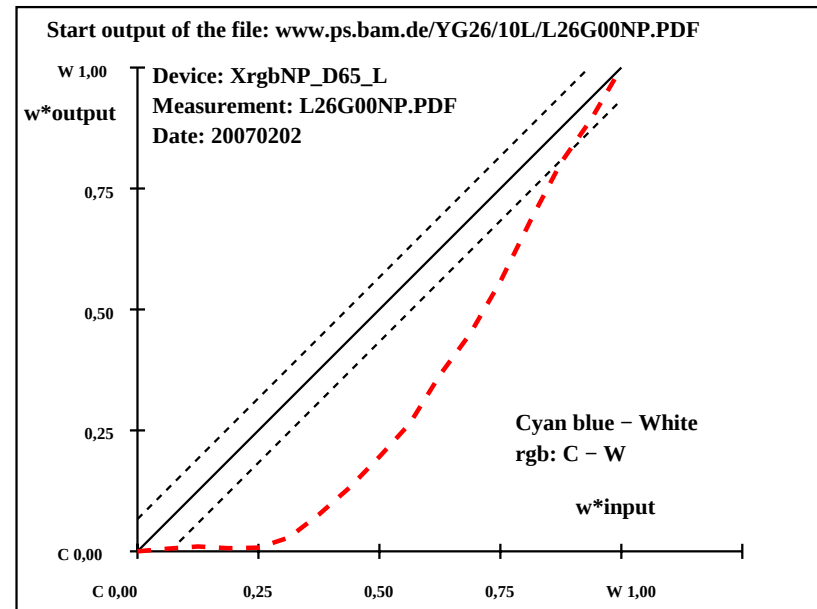

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
V	1	14.6	51.7-60.3	311	14.6	51.7-60.3	311	0.0	0.0
	2	19.5	48.5-56.5	311	20.0	46.6-59.4	308	0.5	-1.8
	3	24.3	45.2-52.8	311	26.5	39.6-56.5	305	2.1	-5.5
	4	29.2	42.0-49.0	311	32.8	33.1-52.8	302	3.6	-8.8
	5	34.1	38.8-45.2	311	38.8	28.0-49.0	300	4.7	-10.7
	6	39.0	35.5-41.4	311	44.5	23.9-45.1	298	5.5	-11.5
	7	43.9	32.3-37.7	311	49.3	20.5-41.4	296	5.4	-11.7
	8	48.8	29.1-33.9	311	55.0	16.2-37.0	294	6.2	-12.8
	9	53.6	25.9-30.1	311	60.0	13.0-33.0	291	6.4	-12.8
	10	58.5	22.6-26.3	311	65.4	10.5-28.5	290	6.8	-12.0
	11	63.4	19.4-22.6	311	70.9	8.1-23.5	289	7.4	-11.2
	12	68.3	16.2-18.8	311	76.3	6.2-18.3	289	8.0	-9.9
	13	73.2	12.9-15.0	311	82.0	4.4-12.4	289	8.8	-8.4
	14	78.1	9.7-11.2	311	87.3	2.3-6.5	289	9.3	-7.3
	15	82.9	6.5-7.4	311	91.9	-0.1-0.5	252	9.0	-6.6
	16	87.8	3.2-3.7	311	92.7	0.0	0.0	4.9	-3.1
W	17	92.7	0.0	0.0	92.7	0.0	0.0	0.0	0.0
V	18	14.6	51.7-60.3	311	14.6	51.7-60.3	311	0.0	0.0
	19	34.1	38.8-45.2	311	38.8	28.0-49.0	300	4.7	-10.7
	20	53.6	25.9-30.1	311	60.0	13.0-33.0	291	6.4	-12.8
	21	73.2	12.9-15.0	311	82.0	4.4-12.4	289	8.8	-8.4
W	22	92.7	0.0	0.0	92.7	0.0	0.0	0.0	0.0


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.7 - 14.57$
Regularity
 $g^* = 44.2$
Lightness gamut relative to offset
 $f^* = 100.9$
Violet blue - White
rgb: V - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 8.7$
 $\Delta E^*_{CIELAB} = 10.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.7$
 $\Delta E^*_{CIELAB} = 7.9$
Mean colour reproduction index: $R^*_{ab,m} = 55$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
V	1	38.2	2.0-49.0	272	38.2	2.0-49.0	272	0.0	0.0
	2	41.8	1.9-45.9	272	37.0	3.3-48.9	274	-4.7	1.4
	3	45.4	1.7-42.8	272	36.9	3.6-48.9	274	-8.4	1.9
	4	49.0	1.6-39.8	272	37.2	3.5-48.7	274	-11.7	1.9
	5	52.5	1.5-36.7	272	39.0	2.3-48.4	273	-13.5	0.8
	6	56.1	1.3-33.6	272	42.9	1.1-46.3	271	-13.1	-0.1
	7	59.7	1.2-30.5	272	47.4	1.0-43.1	271	-12.2	-0.1
	8	63.3	1.1-27.4	272	52.3	0.0-40.0	270	-10.9	-1.0
	9	66.9	1.0-24.3	272	58.2	0.0-35.4	270	-8.6	-0.9
	10	70.5	0.8-21.3	272	63.9	-0.1-30.9	270	-6.5	-0.9
	11	74.0	0.7-18.2	272	69.9	0.0-25.3	270	-4.1	-0.7
	12	77.6	0.6-15.1	272	74.9	-1.0-21.1	267	-2.7	-1.6
	13	81.2	0.4-12.0	272	79.9	-0.1-16.6	269	-1.3	-0.5
	14	84.8	0.3-8.9	272	83.2	0.3-12.9	271	-1.5	0.0
	15	88.4	0.2-5.9	272	86.5	1.4-9.4	278	-1.8	1.2
	16	92.0	0.0-2.8	271	88.4	2.0-6.9	286	-3.4	2.0
W	17	95.5	0.0	0.2	117	95.5	0.0	0.2	117
V	18	38.2	2.0-49.0	272	38.2	2.0-49.0	272	0.0	0.0
	19	52.5	1.5-36.7	272	39.0	2.3-48.4	273	-13.5	0.8
	20	66.9	1.0-24.3	272	58.2	0.0-35.4	270	-8.6	-0.9
	21	81.2	0.4-12.0	272	79.9	-0.1-16.6	269	-1.3	-0.5
W	22	95.5	0.0	0.2	117	95.5	0.0	0.2	117

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.54 - 38.21$
Regularity
 $g^* = 3.5$
Lightness gamut relative to offset
 $f^* = 74.1$
Violet blue - White
rgb: V - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 7.0$
 $\Delta E^*_{CIELAB} = 9.5$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 5.5$
 $\Delta E^*_{CIELAB} = 7.4$
Mean colour reproduction index: $R^*_{ab,m} = 58$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

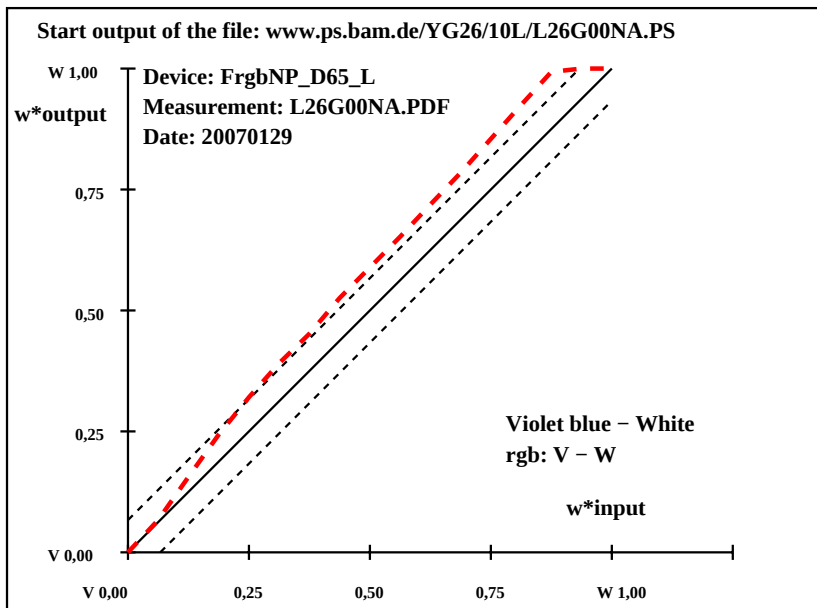

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

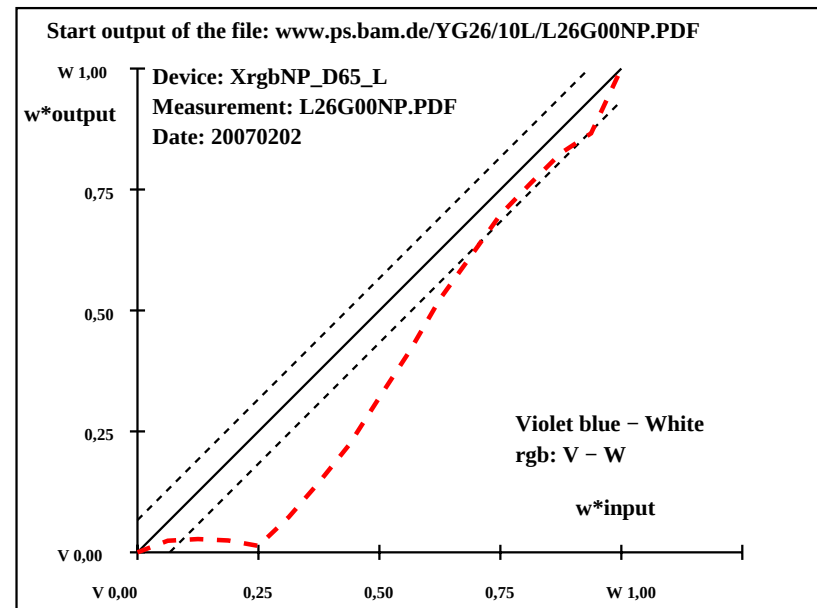

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.7	0.0	0.0	0	8.7	0.0	0.0
	2	13.9	0.0	0.0	0	13.9	0.7	-2.5
	3	19.1	0.0	0.0	0	20.8	-0.2	-3.9
	4	24.4	0.0	0.0	0	27.4	-1.8	-3.0
	5	29.6	0.0	0.0	0	34.4	-2.2	-3.4
	6	34.9	0.0	0.0	0	40.2	-2.7	-1.7
	7	40.1	0.0	0.0	0	45.9	-3.1	-1.5
	8	45.4	0.0	0.0	0	52.0	-3.9	-1.1
Z	9	50.6	0.0	0.0	0	57.5	-3.9	-1.5
	10	55.9	0.0	0.0	0	63.4	-3.1	-1.9
	11	61.1	0.0	0.0	0	69.1	-1.8	-2.1
	12	66.4	0.0	0.0	0	75.2	-0.6	-2.1
	13	71.6	0.0	0.0	0	81.2	0.1	-1.4
	14	76.9	0.0	0.0	0	86.9	0.0	-0.1
	15	82.1	0.0	0.0	0	92.0	-0.7	1.1
	16	87.4	0.0	0.0	0	92.7	0.0	0.0
W	17	92.6	0.0	0.0	0	92.6	0.0	0.0
N	18	8.7	0.0	0.0	0	8.7	0.0	0.0
	19	29.6	0.0	0.0	0	34.4	-2.2	-3.4
Z	20	50.6	0.0	0.0	0	57.5	-3.9	-1.5
	21	71.6	0.0	0.0	0	81.2	0.1	-1.4
W	22	92.6	0.0	0.0	0	92.6	0.0	0.0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.63 - 8.65$
Regularity
 $g^* = 44.4$
Lightness gamut relative to offset
 $f^* = 108.5$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.5$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.0$
 $\Delta E^*_{CIELAB} = 4.8$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	21.7	0.0	0.0	0	21.7	0.0	0.0
	2	26.3	0.0	0.0	0	22.6	0.0	0.0
	3	30.9	0.0	0.0	0	24.8	0.0	0.1
	4	35.5	0.0	0.0	0	29.1	0.0	0.0
	5	40.1	0.0	0.0	0	34.7	0.0	0.0
	6	44.7	0.0	0.0	0	40.8	0.0	0.0
	7	49.3	0.0	0.0	0	45.6	0.0	0.2
	8	53.9	0.0	0.0	0	52.5	0.0	0.1
Z	9	58.6	0.0	0.0	0	58.7	0.0	0.2
	10	63.2	0.0	0.0	0	64.5	0.0	0.2
	11	67.8	0.0	0.0	0	69.4	0.0	0.2
	12	72.4	0.0	0.0	0	74.3	0.0	0.2
	13	77.0	0.0	0.0	0	79.1	0.0	0.1
	14	81.6	0.0	0.0	0	83.0	0.0	0.0
	15	86.2	0.0	0.0	0	86.4	0.0	0.1
	16	90.8	0.0	0.0	0	89.7	0.0	0.2
W	17	95.5	0.0	0.0	0	95.5	0.0	0.0
N	18	21.7	0.0	0.0	0	21.7	0.0	0.0
	19	40.1	0.0	0.0	0	34.7	0.0	0.0
Z	20	58.6	0.0	0.0	0	58.7	0.0	0.2
	21	77.0	0.0	0.0	0	79.1	0.0	0.1
W	22	95.5	0.0	0.0	0	95.5	0.0	0.0

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.46 - 21.66$
Regularity
 $g^* = 54.2$
Lightness gamut relative to offset
 $f^* = 95.3$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 2.4$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 1.6$
Mean colour reproduction index: $R^*_{ab,m} = 90$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

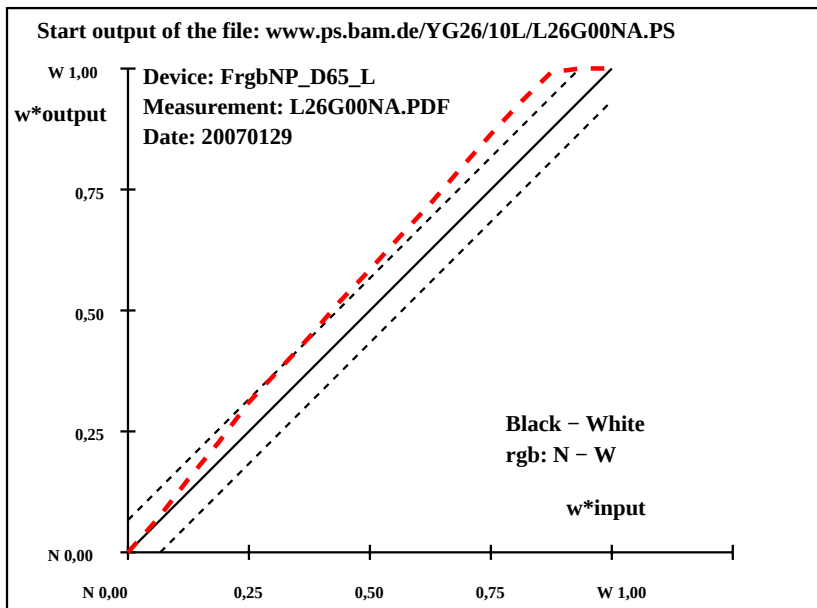

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

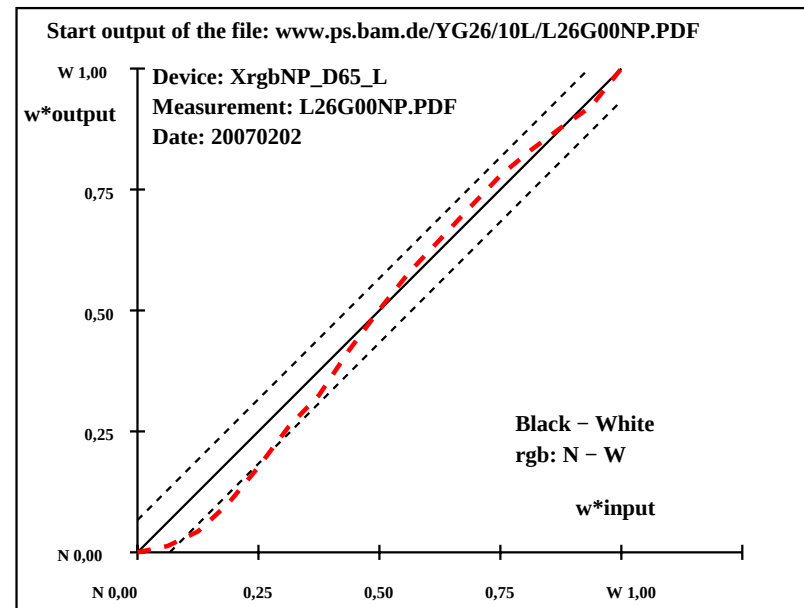

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a _{ref}	hab _{ref}	LAB*a _{out}	hab _{out}	LAB*a _{out} /c-ref	ΔH*	ΔE*	Start output S1
N	1	8.3	0.1	-0.1	297	8.3	0.1	-0.1	297
	2	10.0	3.9	2.6	34	9.7	3.9	1.8	25
	3	11.7	7.7	5.4	35	11.3	8.2	4.5	29
	4	13.4	11.5	8.2	35	13.0	12.5	7.3	30
	5	15.0	15.3	11.0	36	14.9	17.1	10.2	31
	6	16.7	19.1	13.8	36	16.6	21.7	13.2	31
	7	18.4	22.9	16.6	36	18.4	26.0	16.1	32
	8	20.1	26.7	19.4	36	20.5	30.2	19.4	33
	9	21.7	30.5	22.2	36	22.4	34.9	23.0	33
	10	23.4	34.3	25.0	36	25.1	39.2	26.1	34
	11	25.1	38.1	27.8	36	27.3	44.2	30.5	35
	12	26.7	41.9	30.6	36	29.8	49.1	34.6	35
	13	28.4	45.7	33.4	36	32.3	54.6	39.7	36
	14	30.1	49.5	36.2	36	34.0	58.1	42.7	36
	15	31.8	53.3	39.0	36	35.1	60.5	44.7	36
	16	33.4	57.1	41.8	36	35.2	60.7	44.7	36
O	17	35.1	60.9	44.6	36	35.1	60.9	44.6	36
N	18	8.3	0.1	-0.1	297	8.3	0.1	-0.1	297
	19	15.0	15.3	11.0	36	14.9	17.1	10.2	31
	20	21.7	30.5	22.2	36	22.4	34.9	23.0	33
	21	28.4	45.7	33.4	36	32.3	54.6	39.7	36
O	22	35.1	60.9	44.6	36	35.1	60.9	44.6	36

Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out"

ΔL* = 35.11 - 8.34

Regularity g* = 28.8

Lightness gamut relative to offset f* = 34.6

Black - Orange red rgb: N - O

Mean CIELAB difference (17 steps) ΔH*_{CIELAB} = 4.4

ΔE*_{CIELAB} = 4.6

Mean CIELAB difference (5 steps) ΔH*_{CIELAB} = 3.5

ΔE*_{CIELAB} = 3.6

Mean colour reproduction index: R*_{ab,m} = 80

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a _{ref}	hab _{ref}	LAB*a _{out}	hab _{out}	LAB*a _{out} /c-ref	ΔH*	ΔE*	Start output S1
N	1	22.0	0.0	0.0	0	22.0	0.0	0.0	0
	2	23.5	3.8	2.4	32	21.6	2.1	-0.4	347
	3	25.1	7.6	4.7	32	21.6	4.8	0.7	8
	4	26.6	11.3	7.1	32	23.6	8.5	4.2	26
	5	28.1	15.1	9.5	32	26.4	13.3	9.9	37
	6	29.6	18.9	11.8	32	30.4	16.7	18.0	47
	7	31.1	22.7	14.2	32	33.1	22.8	23.4	46
	8	32.7	26.5	16.5	32	34.7	28.2	27.1	44
	9	34.2	30.3	18.9	32	36.4	33.4	29.7	42
	10	35.7	34.0	21.3	32	37.5	37.3	32.0	41
	11	37.2	37.8	23.6	32	38.7	41.6	34.0	39
	12	38.7	41.6	26.0	32	39.9	44.7	35.5	38
	13	40.2	45.4	28.4	32	41.4	48.6	36.7	37
	14	41.8	49.2	30.7	32	42.9	52.1	38.2	36
	15	43.3	52.9	33.1	32	44.3	54.9	38.0	35
	16	44.8	56.7	35.4	32	45.6	58.3	38.1	33
O	17	46.3	60.5	37.8	32	46.3	60.5	37.8	32
N	18	22.0	0.0	0.0	0	22.0	0.0	0.0	0
	19	28.1	15.1	9.5	32	26.4	13.3	9.9	37
	20	34.2	30.3	18.9	32	36.4	33.4	29.7	42
	21	40.2	45.4	28.4	32	41.4	48.6	36.7	37
O	22	46.3	60.5	37.8	32	46.3	60.5	37.8	32

Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out"

ΔL* = 46.32 - 22.02

Regularity g* = 44.0

Lightness gamut relative to offset f* = 31.4

Black - Orange red rgb: N - O

Mean CIELAB difference (17 steps) ΔH*_{CIELAB} = 6.4


ΔE*_{CIELAB} = 6.7

Mean CIELAB difference (5 steps) ΔH*_{CIELAB} = 4.4


ΔE*_{CIELAB} = 4.6

Mean colour reproduction index: R*_{ab,m} = 71

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

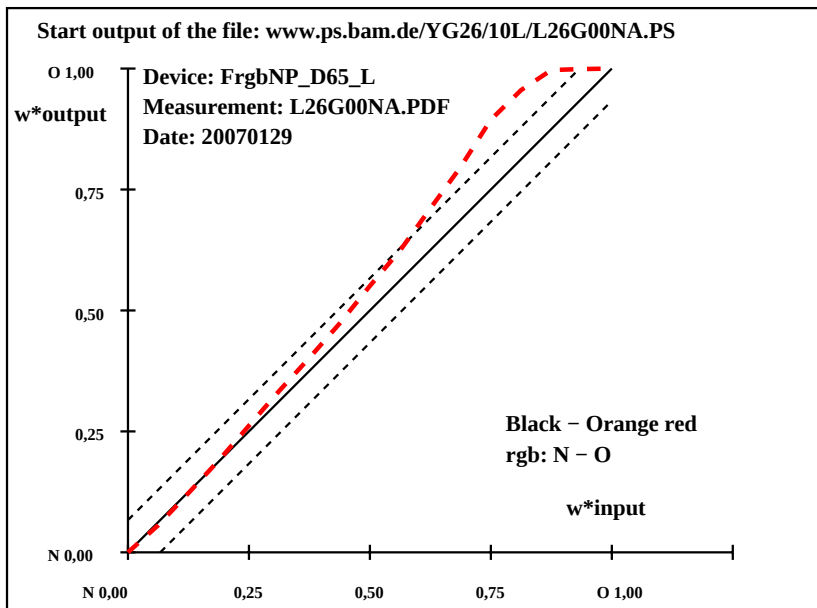

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

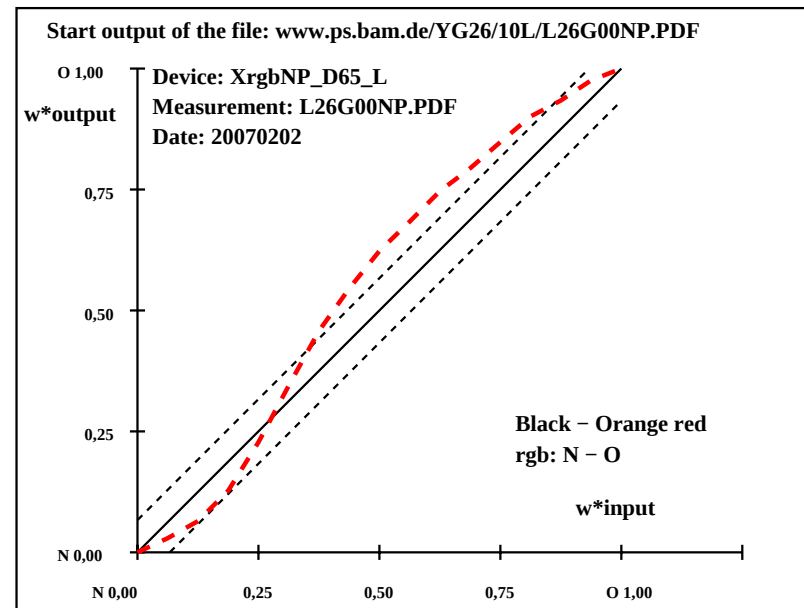


YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.5	0.0	0.0	0	8.5	0.0	0.0
	2	13.2	-0.2	6.9	92	13.2	-2.5	6.5
	3	18.0	-0.4	13.9	92	19.3	-6.1	15.0
	4	22.7	-0.7	20.8	92	25.2	-9.1	23.7
	5	27.4	-0.9	27.7	92	31.5	-11.0	31.9
	6	32.1	-1.2	34.7	92	37.0	-11.8	40.1
	7	36.9	-1.4	41.6	92	42.2	-12.9	47.8
	8	41.6	-1.7	48.5	92	48.4	-14.0	56.5
	9	46.3	-1.9	55.5	92	53.8	-14.5	64.3
	10	51.0	-2.2	62.4	92	59.1	-14.2	72.7
	11	55.7	-2.4	69.3	92	64.6	-12.7	80.6
	12	60.5	-2.7	76.2	92	70.0	-10.3	89.2
	13	65.2	-2.9	83.2	92	75.4	-7.4	97.4
	14	69.9	-3.2	90.1	92	80.0	-5.4	104.5
	15	74.6	-3.4	97.0	92	83.6	-4.4	110.3
	16	79.3	-3.7	104.0	92	83.9	-4.0	110.9
Y	17	84.1	-3.9	110.9	92	84.1	-3.9	110.9
	18	8.5	0.0	0.0	0	8.5	0.0	0.0
	19	27.4	-0.9	27.7	92	31.5	-11.0	31.9
	20	46.3	-1.9	55.5	92	53.8	-14.5	64.3
	21	65.2	-2.9	83.2	92	75.4	-7.4	97.4
Y	22	84.1	-3.9	110.9	92	84.1	-3.9	110.9
Mean colour reproduction index: $R^*_{ab,m} = 48$								


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	22.0	0.0	0.0	0	22.0	0.0	0.0
	2	26.3	-1.0	7.0	99	22.2	-0.7	2.4
	3	30.6	-2.1	14.0	99	26.2	-3.4	11.0
	4	34.9	-3.1	20.9	99	32.4	-5.1	22.2
	5	39.2	-4.2	27.9	99	38.0	-6.9	31.3
	6	43.5	-5.3	34.9	99	43.4	-8.6	40.5
	7	47.8	-6.4	41.9	99	48.4	-9.6	48.8
	8	52.1	-7.4	48.9	99	53.3	-10.5	55.6
	9	56.4	-8.5	55.9	99	58.7	-11.6	63.9
	10	60.7	-9.6	62.8	99	62.6	-12.3	69.9
	11	65.0	-10.7	69.8	99	66.5	-12.9	75.7
	12	69.3	-11.7	76.8	99	69.6	-14.0	80.1
	13	73.6	-12.8	83.8	99	73.2	-14.2	85.4
	14	77.9	-13.9	90.8	99	76.2	-14.7	89.6
	15	82.3	-15.0	97.7	99	79.0	-15.4	93.5
	16	86.6	-16.0	104.7	99	82.7	-15.7	99.2
Y	17	90.9	-17.1	111.7	99	90.9	-17.1	111.7
	18	22.0	0.0	0.0	0	22.0	0.0	0.0
	19	39.2	-4.2	27.9	99	38.0	-6.9	31.3
	20	56.4	-8.5	55.9	99	58.7	-11.6	63.9
	21	73.6	-12.8	83.8	99	73.2	-14.2	85.4
Y	22	90.9	-17.1	111.7	99	90.9	-17.1	111.7
Mean colour reproduction index: $R^*_{ab,m} = 79$								

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

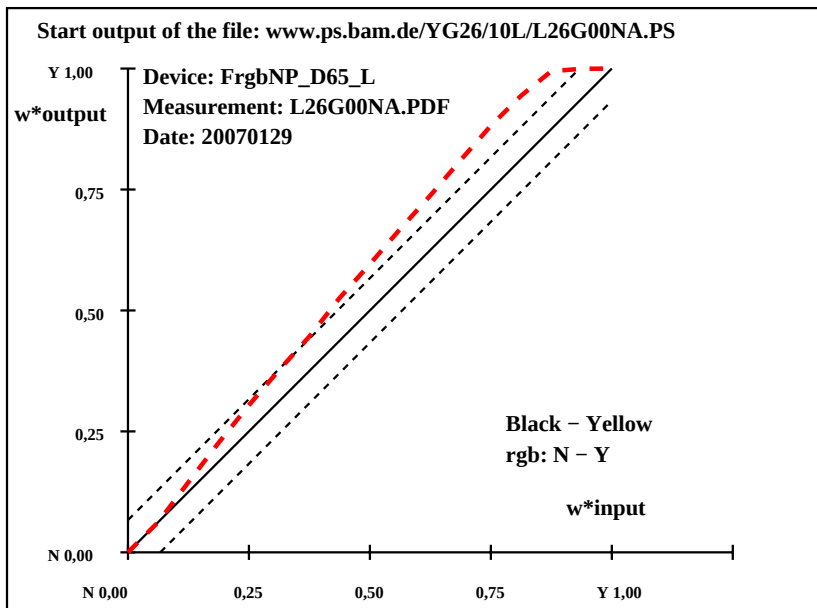

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

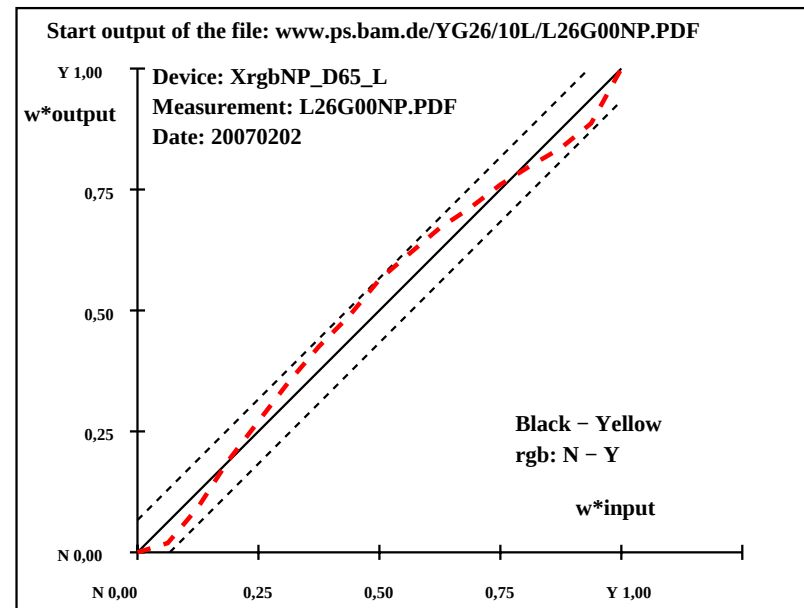


YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref			hab,ref			LAB*a,out			hab,out			LAB*a,out/c-ref			ΔH^*	ΔE^*	Start output S1		
N	1	8.5	0.1	0.0	315	8.5	0.1	0.0	315	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G			
	2	10.7	-3.7	2.9	142	11.7	-6.3	4.0	148	1.0	-2.5	1.1	2.8	3.0				relative CIELAB data used for "out"			
	3	12.9	-7.5	6.0	142	15.6	-14.5	9.6	147	2.7	-6.9	3.6	7.8	8.3				$\Delta L^* = 43.7 - 8.49$			
	4	15.1	-11.4	9.0	142	19.8	-22.2	15.1	146	4.7	-10.7	6.1	12.4	13.3				Regularity			
	5	17.3	-15.3	12.1	142	23.5	-29.2	20.1	146	6.2	-13.8	8.0	16.1	17.2				$g^* = 10.4$			
	6	19.5	-19.1	15.1	142	26.7	-34.8	24.6	145	7.2	-15.6	9.5	18.3	19.7				Lightness gamut relative to offset			
	7	21.7	-23.0	18.2	142	29.7	-39.9	28.7	144	8.0	-16.8	10.5	19.9	21.5				$f^* = 45.5$			
	8	23.9	-26.9	21.2	142	33.0	-45.0	33.4	143	9.1	-18.0	12.2	21.8	23.6				Black - Leaf green			
	9	26.1	-30.8	24.2	142	35.5	-49.3	37.1	143	9.4	-18.5	12.9	22.6	24.5				rgb: N - L			
	10	28.3	-34.6	27.3	142	37.7	-52.7	40.1	143	9.4	-18.0	12.8	22.2	24.1				Mean CIELAB difference (17 steps)			
L	11	30.5	-38.5	30.3	142	39.6	-55.6	42.9	142	9.1	-17.0	12.6	21.2	23.1				$\Delta H^*_{CIELAB} = 13.5$			
	12	32.7	-42.4	33.4	142	41.0	-57.7	44.8	142	8.3	-15.2	11.4	19.1	20.8				$\Delta E^*_{CIELAB} = 14.6$			
	13	34.9	-46.2	36.4	142	42.1	-59.5	46.4	142	7.2	-13.2	10.0	16.6	18.1				Mean CIELAB difference (5 steps)			
	14	37.1	-50.1	39.5	142	43.0	-60.8	47.5	142	5.9	-10.6	8.0	13.4	14.6				$\Delta H^*_{CIELAB} = 11.0$			
	15	39.3	-54.0	42.5	142	43.7	-61.7	48.7	142	4.4	-7.6	6.2	9.9	10.8				$\Delta E^*_{CIELAB} = 12.0$			
	16	41.5	-57.8	45.6	142	43.7	-61.6	48.8	142	2.2	-3.7	3.2	5.0	5.4				Mean colour reproduction index: $R^*_{ab,m} = 36$			
	17	43.7	-61.7	48.6	142	43.7	-61.7	48.6	142	0.0	0.0	0.0	0.0	0.0							
	18	8.5	0.1	0.0	315	8.5	0.1	0.0	315	0.0	0.0	0.0	0.0	0.0							
	19	17.3	-15.3	12.1	142	23.5	-29.2	20.1	146	6.2	-13.8	8.0	16.1	17.2							
	20	26.1	-30.8	24.2	142	35.5	-49.3	37.1	143	9.4	-18.5	12.9	22.6	24.5							
L	21	34.9	-46.2	36.4	142	42.1	-59.5	46.4	142	7.2	-13.2	10.0	16.6	18.1							
	22	43.7	-61.7	48.6	142	43.7	-61.7	48.6	142	0.0	0.0	0.0	0.0	0.0							


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1												
N	1	21.9	0.0	0.0	0	21.9	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G		
	2	23.4	-4.1	2.3	152	21.3	-0.8	-0.2	198	-2.0	3.3	-2.5	4.2	4.7	3.3	3.4	4.5	6.9	relative CIELAB data used for "out"		
	3	24.9	-8.3	4.5	152	22.1	-3.4	0.6	170	-2.7	4.9	-3.8	6.3	6.9	3.3	3.4	4.5	6.9	$\Delta L^* = 46.01 - 21.91$		
	4	26.4	-12.5	6.8	152	24.8	-8.5	5.3	148	-1.5	4.0	-1.3	4.3	4.5	3.3	3.4	4.5	6.9	Regularity		
	5	27.9	-16.7	9.0	152	28.7	-17.2	12.3	145	0.8	-0.4	3.3	3.3	3.4	3.3	3.4	4.5	6.9	$g^* = 27.7$		
	6	29.4	-20.9	11.3	152	31.5	-28.3	18.1	147	2.0	-7.3	6.9	10.1	10.3	8.5	17.9	18.3	18.3	Lightness gamut relative to offset		
	7	30.9	-25.1	13.5	152	34.6	-37.9	22.3	150	3.6	-12.7	8.8	15.5	16.0	8.5	17.9	18.3	18.3	$f^* = 31.1$		
	8	32.5	-29.3	15.8	152	36.1	-45.1	24.2	152	3.7	-15.7	8.5	17.9	18.3	8.5	17.9	18.3	18.3	Black – Leaf green		
	9	34.0	-33.5	18.0	152	38.2	-49.8	26.2	152	4.3	-16.2	8.2	18.2	18.7	8.2	18.2	18.7	18.7	rgb: N – L		
	10	35.5	-37.7	20.3	152	40.1	-54.6	28.5	152	4.6	-16.8	8.3	18.8	19.4	8.3	18.8	19.4	19.4	Mean CIELAB difference (17 steps)		
L	11	37.0	-41.9	22.5	152	41.8	-59.0	30.7	153	4.8	-17.0	8.2	19.0	19.6	8.2	19.0	19.6	19.6	$\Delta H^*_{CIELAB} = 10.4$		
	12	38.5	-46.1	24.8	152	42.6	-62.8	31.8	153	4.1	-16.6	7.0	18.1	18.6	7.0	18.1	18.6	18.6	$\Delta E^*_{CIELAB} = 10.7$		
	13	40.0	-50.3	27.0	152	43.4	-64.9	32.9	153	3.4	-14.5	5.9	15.7	16.1	5.9	15.7	16.1	16.1	Mean CIELAB difference (5 steps)		
	14	41.5	-54.5	29.3	152	44.0	-66.5	33.1	154	2.5	-11.9	3.8	12.6	12.8	3.8	12.6	12.8	12.8	$\Delta H^*_{CIELAB} = 7.5$		
	15	43.0	-58.7	31.5	152	44.3	-67.0	33.8	153	1.3	-8.2	2.3	8.6	8.7	2.3	8.6	8.7	8.7	$\Delta E^*_{CIELAB} = 7.7$		
	16	44.5	-62.9	33.8	152	45.1	-67.1	34.4	153	0.6	-4.1	0.7	4.3	4.3	0.7	4.3	4.3	4.3	Mean colour reproduction index: $R^*_{ab,m} = 54$		
	17	46.0	-67.1	36.0	152	46.0	-67.1	36.0	152	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
	18	21.9	0.0	0.0	0	21.9	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			
	19	27.9	-16.7	9.0	152	28.7	-17.2	12.3	145	0.8	-0.4	3.3	3.3	3.4	3.3	3.4	3.3	3.4			
	20	34.0	-33.5	18.0	152	38.2	-49.8	26.2	152	4.3	-16.2	8.2	18.2	18.7	8.2	18.2	18.7	18.7			
L	21	40.0	-50.3	27.0	152	43.4	-64.9	32.9	153	3.4	-14.5	5.9	15.7	16.1	5.9	15.7	16.1	16.1			
	22	46.0	-67.1	36.0	152	46.0	-67.1	36.0	152	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0			

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

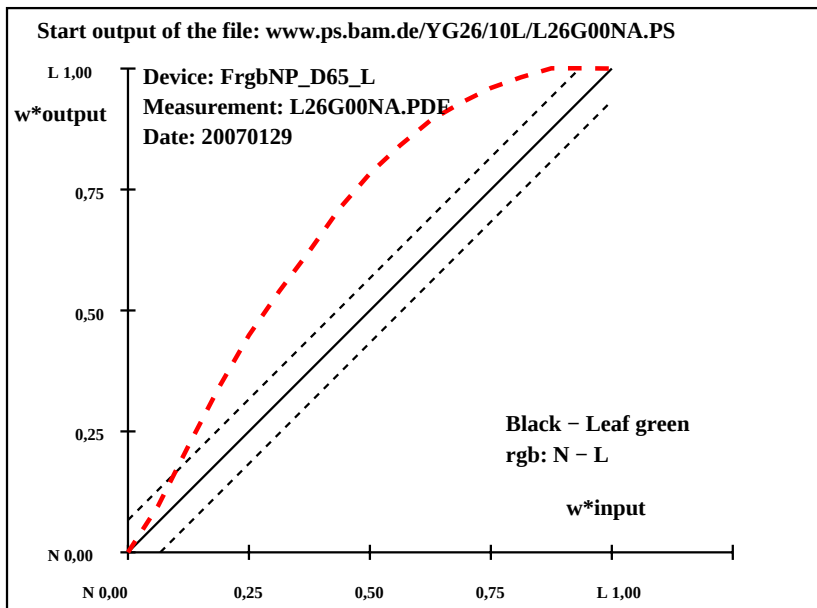

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

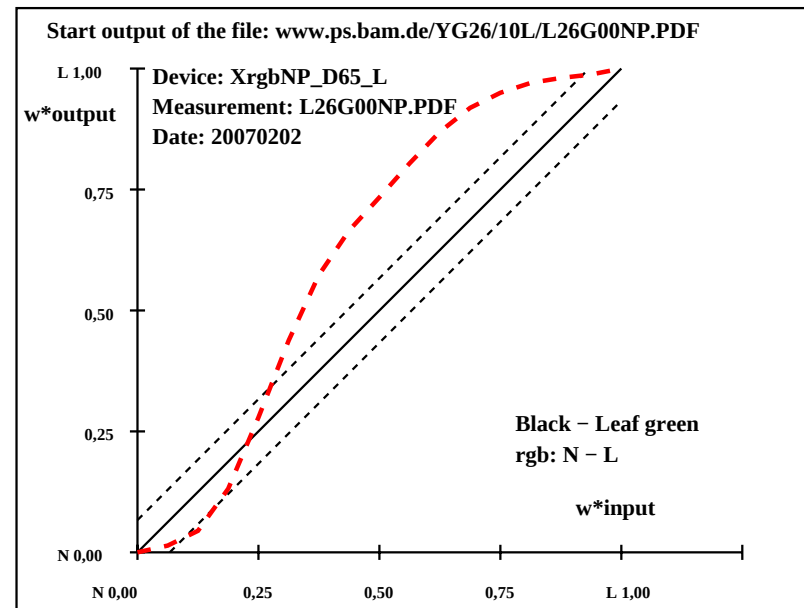

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.8	0.1	0.0	315	8.8	0.1	0.0
	2	11.6	-1.6	-2.0	230	12.3	-2.8	-4.2
	3	14.4	-3.4	-4.0	229	17.2	-7.3	-7.4
	4	17.2	-5.3	-5.9	228	21.8	-12.4	-8.6
	5	20.0	-7.1	-7.9	228	26.6	-15.9	-10.8
	6	22.8	-8.9	-9.9	228	30.0	-20.0	-11.4
	7	25.6	-10.7	-11.9	228	33.5	-22.9	-12.8
	8	28.4	-12.5	-13.9	228	37.3	-26.2	-14.1
	9	31.2	-14.4	-15.9	228	40.5	-28.1	-16.2
	10	34.0	-16.2	-17.8	228	43.4	-29.2	-18.7
	11	36.8	-18.0	-19.8	228	46.1	-29.5	-21.7
	12	39.6	-19.8	-21.8	228	48.4	-29.5	-24.5
	13	42.4	-21.6	-23.8	228	50.4	-29.4	-27.3
	14	45.2	-23.4	-25.8	228	52.1	-29.6	-29.1
	15	48.0	-25.3	-27.7	228	53.4	-29.8	-30.6
	16	50.8	-27.1	-29.7	228	53.7	-29.0	-31.6
C	17	53.6	-28.9	-31.7	228	53.6	-28.9	-31.7
N	18	8.8	0.1	0.0	315	8.8	0.1	0.0
	19	20.0	-7.1	-7.9	228	26.6	-15.9	-10.8
	20	31.2	-14.4	-15.9	228	40.5	-28.1	-16.2
	21	42.4	-21.6	-23.8	228	50.4	-29.4	-27.3
C	22	53.6	-28.9	-31.7	228	53.6	-28.9	-31.7


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 53.56 - 8.82$
Regularity
 $g^* = 18.1$
Lightness gamut relative to offset
 $f^* = 57.8$
Black - Cyan blue
rgb: N - C
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 7.9$
 $\Delta E^*_{CIELAB} = 9.8$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.3$
 $\Delta E^*_{CIELAB} = 7.9$
Mean colour reproduction index: $R^*_{ab,m} = 57$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	20.7	0.0	-0.2	252	20.7	0.0	-0.2
	2	22.5	-0.9	-3.5	254	20.3	-1.1	-4.3
	3	24.4	-1.9	-6.8	254	20.6	-1.8	-7.7
	4	26.3	-2.8	-10.1	254	22.7	-3.8	-12.9
	5	28.2	-3.8	-13.4	254	26.0	-6.8	-16.3
	6	30.1	-4.7	-16.7	254	27.8	-10.9	-18.1
	7	32.0	-5.6	-20.0	254	30.1	-15.0	-19.1
	8	33.9	-6.6	-23.3	254	32.7	-17.1	-22.4
	9	35.8	-7.5	-26.6	254	36.5	-19.8	-26.1
	10	37.6	-8.4	-29.8	254	39.6	-21.8	-29.3
	11	39.5	-9.4	-33.1	254	42.6	-22.9	-33.0
	12	41.4	-10.3	-36.4	254	45.4	-24.4	-35.7
	13	43.3	-11.3	-39.7	254	46.9	-24.6	-38.5
	14	45.2	-12.2	-43.0	254	48.3	-24.7	-40.3
	15	47.1	-13.1	-46.3	254	48.3	-23.6	-41.4
	16	49.0	-14.1	-49.6	254	49.3	-22.8	-43.3
C	17	50.9	-15.0	-52.9	254	50.9	-15.0	-52.9
N	18	20.7	0.0	-0.2	252	20.7	0.0	-0.2
	19	28.2	-3.8	-13.4	254	26.0	-6.8	-16.3
	20	35.8	-7.5	-26.6	254	36.5	-19.8	-26.1
	21	43.3	-11.3	-39.7	254	46.9	-24.6	-38.5
C	22	50.9	-15.0	-52.9	254	50.9	-15.0	-52.9

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 50.86 - 20.66$
Regularity
 $g^* = 38.2$
Lightness gamut relative to offset
 $f^* = 39.0$
Black - Cyan blue
rgb: N - C
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 8.1$
 $\Delta E^*_{CIELAB} = 8.6$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.0$
 $\Delta E^*_{CIELAB} = 6.2$
Mean colour reproduction index: $R^*_{ab,m} = 63$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

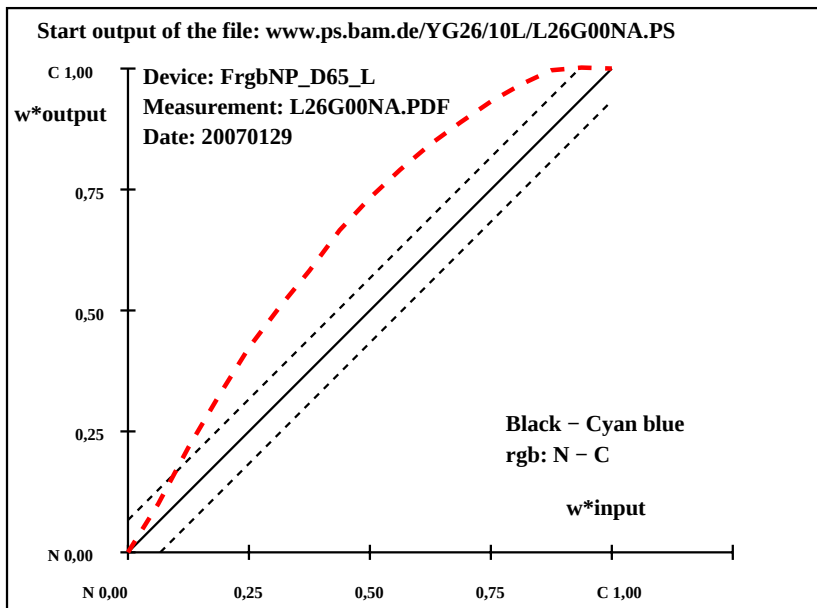

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

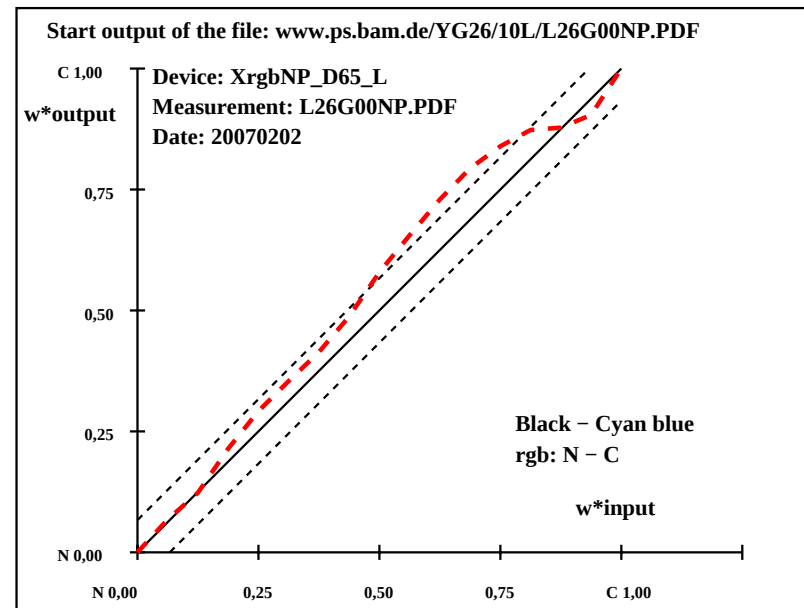


YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start output S1
N	1	8.7	0.1	0.0	0	8.7	0.1	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0
	2	9.1	3.4	-3.7	312	8.9	4.7	-8.5 299 -0.1 1.3 -4.7 5.0 5.0
	3	9.4	6.7	-7.5	311	9.4	10.2	-16.7 301 0.0 3.5 -9.1 9.9 9.9
	4	9.7	10.0	-11.3	311	9.7	14.6	-22.3 303 0.0 4.6 -10.9 11.9 11.9
	5	10.0	13.3	-15.1	311	10.9	19.0	-27.6 304 0.9 5.7 -12.4 13.8 13.8
	6	10.3	16.6	-18.9	311	10.5	23.1	-32.2 306 0.2 6.5 -13.2 14.8 14.8
	7	10.7	19.9	-22.7	311	11.0	27.0	-36.3 307 0.3 7.1 -13.5 15.4 15.4
	8	11.0	23.2	-26.5	311	11.4	31.2	-40.5 308 0.4 8.0 -13.9 16.2 16.2
	9	11.3	26.5	-30.3	311	12.0	34.9	-44.1 308 0.7 8.4 -13.8 16.2 16.2
	10	11.6	29.8	-34.0	311	12.3	39.2	-48.1 309 0.6 9.4 -14.0 16.9 16.9
	11	11.9	33.1	-37.8	311	12.8	43.0	-51.8 310 0.9 9.9 -13.9 17.1 17.1
	12	12.3	36.4	-41.6	311	13.3	46.1	-54.7 310 1.0 9.7 -13.0 16.3 16.3
	13	12.6	39.7	-45.4	311	13.8	48.1	-56.5 310 1.2 8.4 -11.0 13.9 14.0
	14	12.9	43.0	-49.2	311	14.0	50.1	-58.3 311 1.1 7.1 -9.0 11.5 11.6
	15	13.2	46.3	-53.0	311	13.9	51.9	-59.9 311 0.7 5.6 -6.8 8.9 8.9
	16	13.6	49.6	-56.8	311	13.9	52.7	-60.5 311 0.4 3.1 -3.6 4.8 4.8
V	17	13.9	52.9	-60.6	311	13.9	52.9	-60.6 311 0.0 0.0 0.0 0.0 0.0 0.0
N	18	8.7	0.1	0.0	0	8.7	0.1	0.0 0.0 0.0 0.0 0.0 0.0
	19	10.0	13.3	-15.1	311	10.9	19.0	-27.6 304 0.9 5.7 -12.4 13.8 13.8
	20	11.3	26.5	-30.3	311	12.0	34.9	-44.1 308 0.7 8.4 -13.8 16.2 16.2
	21	12.6	39.7	-45.4	311	13.8	48.1	-56.5 310 1.2 8.4 -11.0 13.9 14.0
V	22	13.9	52.9	-60.6	311	13.9	52.9	-60.6 311 0.0 0.0 0.0 0.0 0.0 0.0
Mean colour reproduction index: $R^*_{ab,m} = 50$								


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start output S1
N	1	20.4	0.0	-0.2	252	20.4	0.0	-0.2 252 0.0 0.0 0.0 0.0 0.0
	2	21.5	0.0	-3.3	270	19.5	-0.4	-4.6 264 -1.9 -0.4 -1.2 1.4 2.5
	3	22.7	0.1	-6.3	271	19.3	-0.4	-7.8 266 -3.3 -0.5 -1.4 1.6 3.8
	4	23.8	0.1	-9.4	271	20.1	-0.8	-11.7 266 -3.6 -0.9 -2.2 2.5 4.5
	5	25.0	0.2	-12.5	271	22.1	-1.1	-17.3 266 -2.8 -1.3 -4.7 5.1 5.8
	6	26.1	0.3	-15.5	271	24.3	-0.7	-22.8 268 -1.7 -1.0 -7.2 7.4 7.6
	7	27.3	0.4	-18.6	271	25.7	0.2	-26.8 270 -1.5 -0.1 -8.1 8.2 8.4
	8	28.4	0.5	-21.6	271	27.0	0.9	-29.9 272 -1.4 0.4 -8.2 8.3 8.4
	9	29.6	0.6	-24.7	271	27.9	1.8	-33.0 273 -1.5 1.3 -8.2 8.4 8.6
	10	30.7	0.6	-27.8	271	29.2	2.7	-35.9 274 -1.5 2.1 -8.0 8.4 8.5
	11	31.9	0.7	-30.8	271	31.0	3.8	-39.7 275 -0.8 3.1 -8.8 9.4 9.4
	12	33.1	0.8	-33.9	271	32.7	4.4	-42.9 276 -0.3 3.6 -8.9 9.7 9.7
	13	34.2	0.9	-37.0	271	33.8	5.2	-45.4 277 -0.3 4.3 -8.4 9.5 9.5
	14	35.4	1.0	-40.0	271	35.0	5.3	-47.3 276 -0.3 4.3 -7.2 8.5 8.5
	15	36.5	1.0	-43.1	271	36.6	4.2	-48.9 275 0.1 3.2 -5.7 6.6 6.6
	16	37.7	1.1	-46.1	271	37.2	3.3	-49.1 274 -0.4 2.2 -2.9 3.7 3.7
V	17	38.8	1.2	-49.2	271	38.8	1.2	-49.2 271 0.0 0.0 0.0 0.0 0.0 0.0
N	18	20.4	0.0	-0.2	252	20.4	0.0	-0.2 252 0.0 0.0 0.0 0.0 0.0
	19	25.0	0.2	-12.5	271	22.1	-1.1	-17.3 266 -2.8 -1.3 -4.7 5.1 5.8
	20	29.6	0.6	-24.7	271	27.9	1.8	-33.0 273 -1.5 1.3 -8.2 8.4 8.6
	21	34.2	0.9	-37.0	271	33.8	5.2	-45.4 277 -0.3 4.3 -8.4 9.5 9.5
V	22	38.8	1.2	-49.2	271	38.8	1.2	-49.2 271 0.0 0.0 0.0 0.0 0.0 0.0
Mean colour reproduction index: $R^*_{ab,m} = 73$								

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

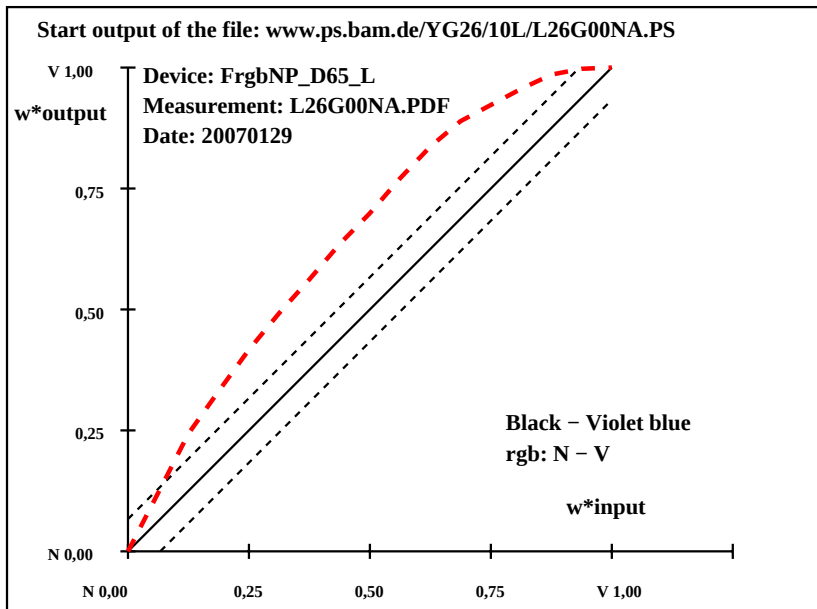

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

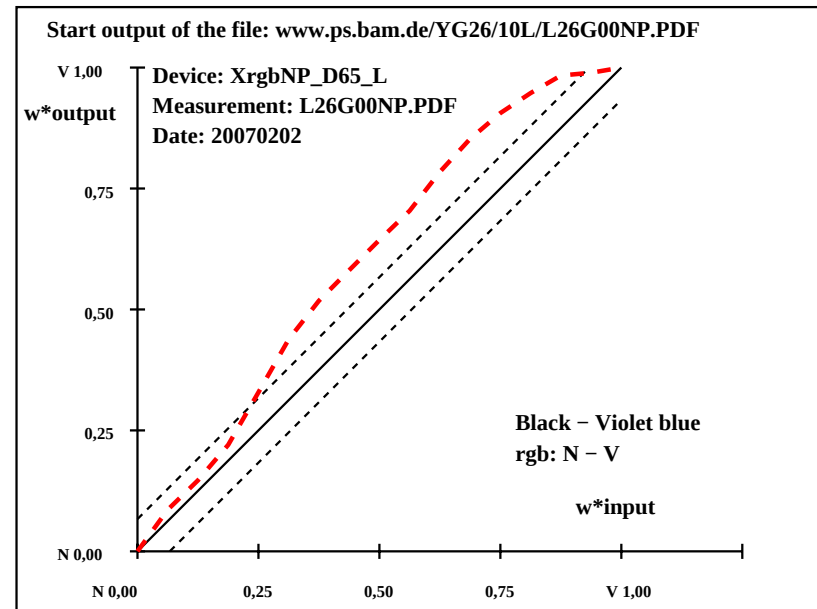

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.9	0.0	0.2	90	8.9	0.0	0.2
	2	10.7	5.0	-1.9	338	10.6	8.1	-6.4
	3	12.6	10.0	-4.1	337	12.8	16.4	-12.6
	4	14.4	14.9	-6.2	337	15.1	23.4	-16.7
	5	16.2	19.9	-8.4	337	17.6	30.4	-20.9
	6	18.1	24.9	-10.6	337	19.6	36.3	-23.0
	7	19.9	29.9	-12.8	337	21.6	41.9	-25.9
	8	21.7	34.9	-14.9	337	23.8	47.6	-28.4
	9	23.6	39.9	-17.1	337	25.9	52.8	-30.6
	10	25.4	44.8	-19.3	337	28.2	58.5	-33.0
	11	27.2	49.8	-21.5	337	30.5	63.6	-34.3
	12	29.1	54.8	-23.6	337	33.0	68.5	-35.1
	13	30.9	59.8	-25.8	337	35.5	72.8	-34.8
	14	32.7	64.8	-28.0	337	37.0	76.4	-34.6
	15	34.6	69.7	-30.1	337	38.2	78.7	-34.3
	16	36.4	74.7	-32.3	337	38.3	79.5	-34.6
M	17	38.2	79.7	-34.5	337	38.2	79.7	-34.5
N	18	8.9	0.0	0.2	90	8.9	0.0	0.2
	19	16.2	19.9	-8.4	337	17.6	30.4	-20.9
	20	23.6	39.9	-17.1	337	25.9	52.8	-30.6
	21	30.9	59.8	-25.8	337	35.5	72.8	-34.8
M	22	38.2	79.7	-34.5	337	38.2	79.7	-34.5


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 38.24 - 8.91$
Regularity
 $g^* = 29.3$
Lightness gamut relative to offset
 $f^* = 37.9$
Black - Magenta red
rgb: N - M
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 12.8$
 $\Delta E^*_{CIELAB} = 13.1$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 10.2$
 $\Delta E^*_{CIELAB} = 10.3$
Mean colour reproduction index: $R^*_{ab,m} = 43$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	20.8	0.0	-0.2	252	20.8	0.0	-0.2
	2	22.3	4.4	-0.6	351	19.5	2.0	-4.1
	3	23.9	8.8	-1.0	353	19.9	6.6	-5.9
	4	25.5	13.3	-1.3	354	21.8	15.4	-10.0
	5	27.1	17.8	-1.7	354	23.7	22.3	-13.6
	6	28.7	22.2	-2.1	354	25.2	28.4	-16.7
	7	30.3	26.7	-2.5	355	27.0	32.9	-18.2
	8	31.9	31.1	-2.8	355	29.2	37.5	-19.3
	9	33.5	35.6	-3.2	355	30.7	41.7	-19.2
	10	35.1	40.1	-3.6	355	32.6	45.5	-18.5
	11	36.7	44.5	-4.0	355	34.8	49.9	-16.7
	12	38.2	49.0	-4.3	355	37.1	54.5	-15.7
	13	39.8	53.5	-4.7	355	39.3	58.9	-12.8
	14	41.4	57.9	-5.1	355	41.7	63.0	-11.6
	15	43.0	62.4	-5.5	355	43.6	66.7	-10.1
	16	44.6	66.8	-5.8	355	44.4	68.1	-9.1
M	17	46.2	71.3	-6.2	355	46.2	71.3	-6.2
N	18	20.8	0.0	-0.2	252	20.8	0.0	-0.2
	19	27.1	17.8	-1.7	354	23.7	22.3	-13.6
	20	33.5	35.6	-3.2	355	30.7	41.7	-19.2
	21	39.8	53.5	-4.7	355	39.3	58.9	-12.8
M	22	46.2	71.3	-6.2	355	46.2	71.3	-6.2

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 46.19 - 20.76$
Regularity
 $g^* = 34.3$
Lightness gamut relative to offset
 $f^* = 32.9$
Black - Magenta red
rgb: N - M
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 10.0$
 $\Delta E^*_{CIELAB} = 10.2$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 7.9$
 $\Delta E^*_{CIELAB} = 8.1$
Mean colour reproduction index: $R^*_{ab,m} = 55$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

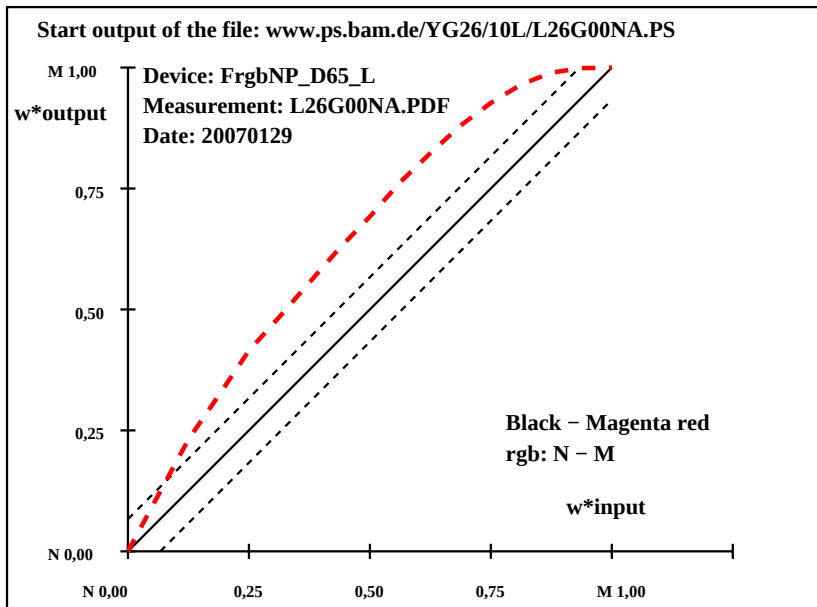

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

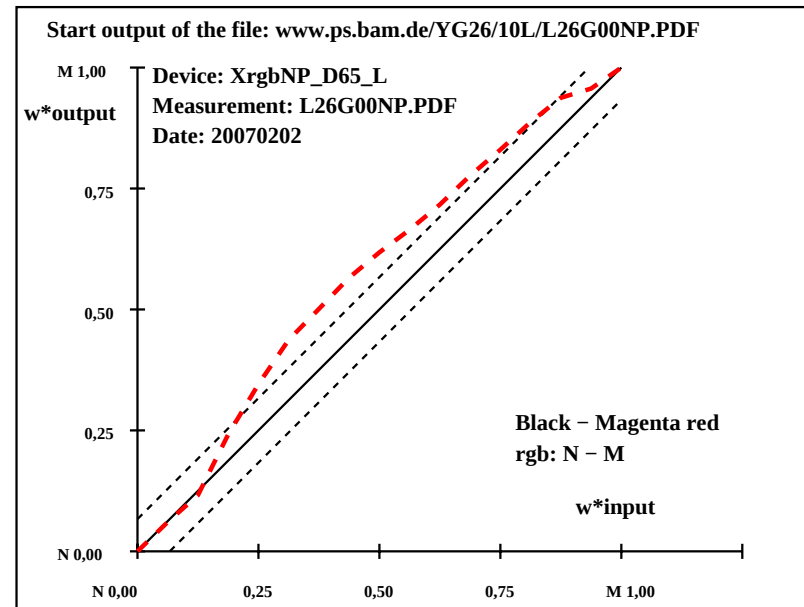

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	9.1	0.0	0.2	90	9.1	0.0	0.2
	2	14.4	0.0	0.2	90	14.6	0.3	-1.7
	3	19.6	0.0	0.2	90	21.7	-0.4	-2.7
	4	24.8	0.0	0.2	90	28.4	-1.8	-1.9
	5	30.0	0.0	0.2	90	35.5	-2.1	-2.3
	6	35.3	0.0	0.1	90	41.3	-2.6	-0.4
	7	40.5	0.0	0.1	90	46.8	-2.6	-0.7
	8	45.7	0.0	0.1	90	52.9	-3.7	-0.2
Z	9	51.0	0.0	0.1	90	58.3	-3.7	-0.8
	10	56.2	0.0	0.1	90	63.8	-3.2	-1.2
	11	61.4	0.0	0.1	90	69.8	-1.8	-1.5
	12	66.7	0.0	0.1	90	75.6	-0.8	-1.6
	13	71.9	0.0	0.1	90	81.6	0.0	-1.1
	14	77.1	0.0	0.0	90	87.1	0.0	0.0
	15	82.3	0.0	0.0	90	92.1	-0.6	1.1
	16	87.6	0.0	0.0	90	92.9	0.0	0.0
W	17	92.8	0.0	0.0	0	92.8	0.0	0.0
N	18	9.1	0.0	0.2	90	9.1	0.0	0.2
	19	30.0	0.0	0.2	90	35.5	-2.1	-2.3
Z	20	51.0	0.0	0.1	90	58.3	-3.7	-0.8
	21	71.9	0.0	0.1	90	81.6	0.0	-1.1
W	22	92.8	0.0	0.0	0	92.8	0.0	0.0


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.81 - 9.12$
Regularity
 $g^* = 42.5$
Lightness gamut relative to offset
 $f^* = 108.1$
Black - White
w: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.1$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 1.7$
 $\Delta E^*_{CIELAB} = 4.9$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	21.3	0.0	-0.1	243	21.3	0.0	-0.1
	2	25.9	0.0	-0.1	242	24.0	0.0	-1.8
	3	30.6	0.0	-0.1	240	26.6	0.0	-3.9
	4	35.2	0.0	-0.1	238	32.1	0.0	-3.0
	5	39.8	0.0	-0.1	236	36.8	0.0	-3.0
	6	44.5	0.0	0.0	234	42.6	0.0	-1.8
	7	49.1	0.0	0.0	231	47.2	0.0	-1.8
	8	53.8	0.0	0.0	228	51.9	0.0	-1.8
Z	9	58.4	0.0	0.0	225	56.8	0.0	-1.5
	10	63.0	0.0	0.0	221	63.2	0.0	0.1
	11	67.7	0.0	0.0	217	67.4	0.0	-0.2
	12	72.3	0.0	0.0	212	71.7	0.0	-0.5
	13	77.0	0.0	0.0	207	75.9	0.0	-0.9
	14	81.6	0.0	0.0	201	81.1	0.0	-0.4
	15	86.2	0.0	0.0	194	85.1	0.0	-1.0
	16	90.9	0.0	0.0	187	89.1	0.0	-1.7
W	17	95.5	0.0	0.0	180	95.5	0.0	0.0
N	18	21.3	0.0	-0.1	243	21.3	0.0	-0.1
	19	39.8	0.0	-0.1	236	36.8	0.0	-3.0
Z	20	58.4	0.0	0.0	225	56.8	0.0	-1.5
	21	77.0	0.0	0.0	207	75.9	0.0	-0.9
W	22	95.5	0.0	0.0	180	95.5	0.0	0.0

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.51 - 21.27$
Regularity
 $g^* = 77.3$
Lightness gamut relative to offset
 $f^* = 95.9$
Black - White
w: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 1.5$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 1.1$
Mean colour reproduction index: $R^*_{ab,m} = 94$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

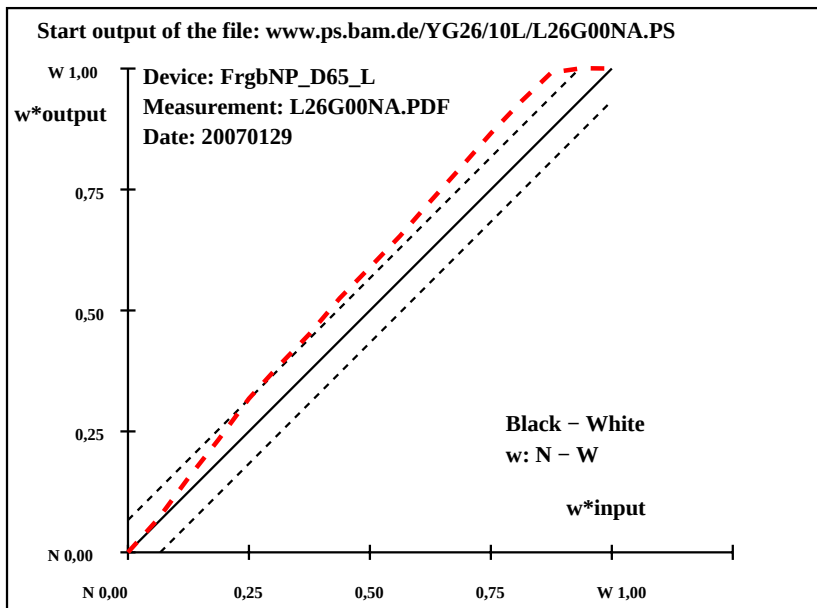

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

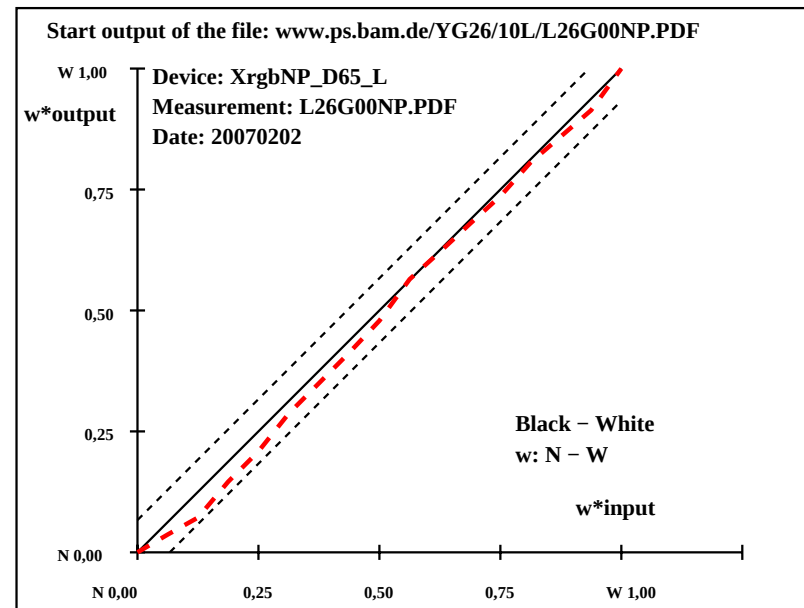


YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1							
O	1	36.2	60.8	44.5	36	36.2	60.8	44.5	36	0.0	0.0	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	39.0	52.7	38.9	36	40.5	57.8	37.0	33	1.6	5.1	-1.8	5.5	5.7		
	3	41.7	44.6	33.3	37	45.2	52.5	29.8	30	3.5	7.9	-3.4	8.7	9.3		
	4	44.4	36.5	27.7	37	48.6	44.3	24.8	29	4.2	7.8	-2.8	8.4	9.3		
	5	47.2	28.4	22.1	38	51.3	34.4	17.9	27	4.1	6.1	-4.1	7.4	8.4		
	6	49.9	20.2	16.5	39	52.7	24.0	13.8	30	2.7	3.8	-2.6	4.6	5.4		
	7	52.7	12.1	10.9	42	54.1	14.1	8.2	30	1.4	2.0	-2.6	3.3	3.6	Regularity	
	8	55.4	4.0	5.3	53	56.4	4.0	4.0	45	1.0	0.0	-1.2	1.3	1.6	$g^* = 36.1$	
Z	9	58.2	-4.0	-0.2	184	58.2	-4.0	-0.2	184	0.0	0.0	0.0	0.0	0.0	0.0	Orange red – Cyan blue rgb: O – Z – C
	10	57.6	-7.1	-4.1	210	60.1	-10.4	-5.2	207	2.5	-3.2	-1.0	3.4	4.3		
	11	57.1	-10.3	-8.1	218	61.7	-15.9	-10.1	213	4.6	-5.5	-1.9	6.0	7.6		
	12	56.6	-13.4	-12.0	222	63.1	-20.3	-14.9	216	6.5	-6.8	-2.8	7.5	10.0		
	13	56.0	-16.5	-15.9	224	63.6	-24.4	-19.3	218	7.6	-7.8	-3.3	8.6	11.4		
	14	55.5	-19.6	-19.8	225	63.1	-27.7	-23.3	220	7.6	-8.0	-3.4	8.8	11.6		
	15	55.0	-22.8	-23.8	226	61.6	-29.8	-26.8	222	6.6	-6.9	-2.9	7.7	10.1	Mean CIELAB difference (17 steps)	
	16	54.5	-25.9	-27.7	227	58.1	-29.5	-29.7	225	3.6	-3.5	-1.9	4.2	5.5	$\Delta H^*_{CIELAB} = 5.0$	
C	17	53.9	-29.0	-31.6	227	53.9	-29.0	-31.6	227	0.0	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 6.1$
O	18	36.2	60.8	44.5	36	36.2	60.8	44.5	36	0.0	0.0	0.0	0.0	0.0	0.0	Mean CIELAB difference (5 steps)
	19	47.2	28.4	22.1	38	51.3	34.4	17.9	27	4.1	6.1	-4.1	7.4	8.4		
Z	20	58.2	-4.0	-0.2	184	58.2	-4.0	-0.2	184	0.0	0.0	0.0	0.0	0.0		
	21	56.0	-16.5	-15.9	224	63.6	-24.4	-19.3	218	7.6	-7.8	-3.3	8.6	11.4	$\Delta H^*_{CIELAB} = 3.2$	
C	22	53.9	-29.0	-31.6	227	53.9	-29.0	-31.6	227	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 4.0$	


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out/c-ref		ΔH^*	ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G		
O	1	46.3	60.2	39.9	34	46.3	60.2	39.9	34	0.0	0.0		0.0	0.0
	2	47.8	52.7	34.9	34	45.8	58.4	36.2	32	-1.9	5.7	1.3	5.9	6.2
	3	49.3	45.2	30.0	34	44.3	55.0	31.1	29	-5.0	9.8	1.1	9.9	11.1
	4	50.8	37.6	25.0	34	43.6	50.4	23.8	25	-7.2	12.8	-1.1	12.8	14.7
	5	52.3	30.1	20.0	34	44.6	43.7	18.6	23	-7.6	13.6	-1.3	13.7	15.7
	6	53.8	22.6	15.0	34	46.1	32.9	13.8	23	-7.6	10.3	-1.1	10.4	13.0
	7	55.3	15.1	10.0	34	49.6	19.9	9.5	26	-5.6	4.9	-0.4	4.9	7.5
	8	56.8	7.5	5.1	34	55.4	7.8	2.8	20	-1.3	0.3	-2.2	2.3	2.7
Z	9	58.4	0.0	0.1	90	58.4	0.0	0.1	90	0.0	0.0	0.0	0.0	0.0
	10	57.3	-1.7	-6.5	255	57.3	-8.2	-8.0	224	0.1	-6.4	-1.4	6.7	6.7
	11	56.2	-3.4	-13.2	255	50.7	-15.3	-17.9	229	-5.4	-11.8	-4.6	12.8	13.9
	12	55.1	-5.2	-19.9	255	47.3	-19.9	-26.5	233	-7.7	-14.6	-6.5	16.1	17.9
	13	54.0	-7.0	-26.6	255	46.5	-22.0	-35.0	238	-7.4	-15.0	-8.3	17.2	18.8
	14	52.9	-8.7	-33.3	255	48.0	-23.4	-40.1	240	-4.8	-14.6	-6.7	16.2	16.9
	15	51.8	-10.5	-40.0	255	47.4	-20.5	-43.4	245	-4.4	-9.9	-3.3	10.6	11.5
	16	50.7	-12.2	-46.7	255	47.9	-20.1	-45.0	246	-2.7	-7.8	1.7	8.0	8.5
C	17	49.6	-14.0	-53.4	255	49.6	-14.0	-53.4	255	0.0	0.0	0.0	0.0	0.0
O	18	46.3	60.2	39.9	34	46.3	60.2	39.9	34	0.0	0.0	0.0	0.0	0.0
	19	52.3	30.1	20.0	34	44.6	43.7	18.6	23	-7.6	13.6	-1.3	13.7	15.7
Z	20	58.4	0.0	0.1	90	58.4	0.0	0.1	90	0.0	0.0	0.0	0.0	0.0
	21	54.0	-7.0	-26.6	255	46.5	-22.0	-35.0	238	-7.4	-15.0	-8.3	17.2	18.8
C	22	49.6	-14.0	-53.4	255	49.6	-14.0	-53.4	255	0.0	0.0	0.0	0.0	0.0
												Mean CIELAB difference (17 steps)	$\Delta H^*_{CIELAB} = 8.7$	
												Mean CIELAB difference (17 steps)	$\Delta E^*_{CIELAB} = 9.7$	
												Mean CIELAB difference (5 steps)	$\Delta H^*_{CIELAB} = 6.2$	
												Mean CIELAB difference (5 steps)	$\Delta E^*_{CIELAB} = 6.9$	

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

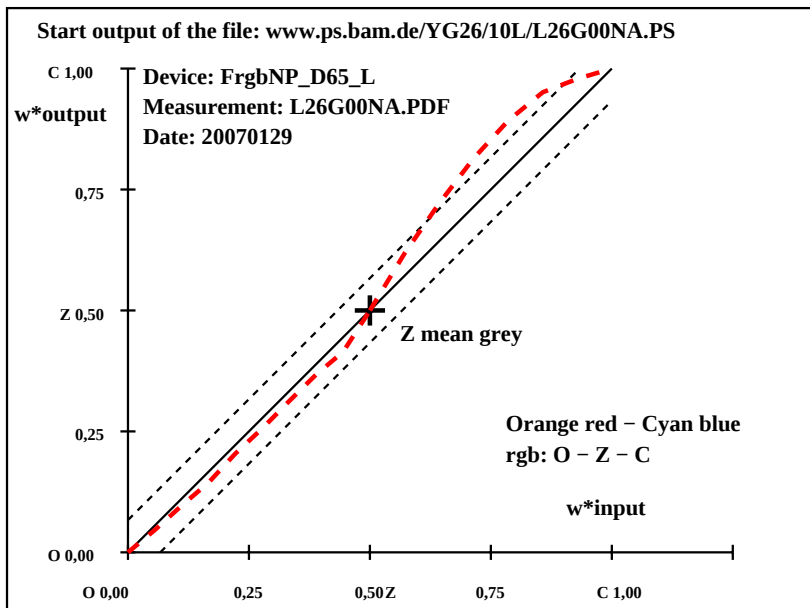

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

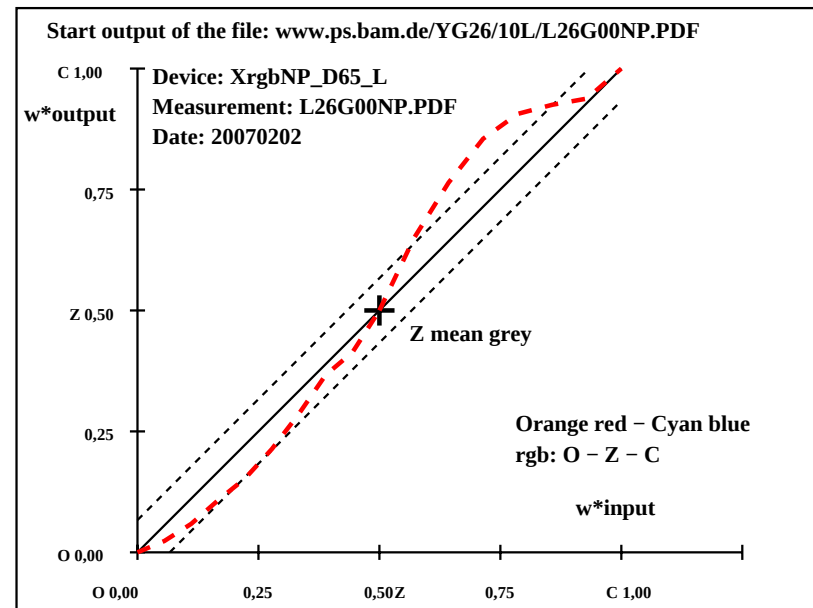

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	84.6	-3.8	110.392	84.6	-3.8	110.392	0.0	0.0
	2	81.3	-3.8	96.5	92	85.8	-5.7	98.3	93
	3	78.1	-3.8	82.6	93	86.5	-7.6	85.7	95
	4	74.8	-3.8	68.8	93	83.1	-8.8	71.0	97
	5	71.5	-3.8	54.9	94	78.6	-9.8	54.5	100
	6	68.2	-3.7	41.1	95	73.4	-10.4	41.2	104
	7	65.0	-3.7	27.2	98	68.5	-10.0	26.6	111
	8	61.7	-3.7	13.3	106	63.3	-7.9	12.7	122
Z	9	58.4	-3.7	-0.4	187	58.4	-3.7	-0.4	187
	10	52.9	3.2	-7.9	292	53.3	1.9	-13.0	278
	11	47.4	10.2	-15.4	303	48.4	9.6	-25.1	291
	12	41.9	17.2	-22.8	307	43.6	16.9	-35.1	296
	13	36.4	24.2	-30.3	309	38.5	24.2	-43.6	299
	14	30.9	31.2	-37.8	309	32.5	31.8	-50.7	302
	15	25.3	38.2	-45.3	310	26.2	39.7	-56.1	305
	16	19.8	45.2	-52.7	311	19.8	47.1	-59.4	308
V	17	14.3	52.2	-60.2	311	14.3	52.2	-60.2	311
Y	18	84.6	-3.8	110.392	84.6	-3.8	110.392	0.0	0.0
	19	71.5	-3.8	54.9	94	78.6	-9.8	54.5	100
Z	20	58.4	-3.7	-0.4	187	58.4	-3.7	-0.4	187
	21	36.4	24.2	-30.3	309	38.5	24.2	-43.6	299
V	22	14.3	52.2	-60.2	311	14.3	52.2	-60.2	311

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Regularity
 $g^* = 24.8$

Yellow - Violet blue
rgb: Y - Z - V

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 6.3$
 $\Delta E^*_{CIELAB} = 7.4$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 3.9$
 $\Delta E^*_{CIELAB} = 4.6$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	90.8	-16.9	112.299	90.8	-16.9	112.299	0.0	0.0
	2	86.7	-14.8	98.2	99	84.3	-15.2	101.799	-2.2
	3	82.5	-12.7	84.1	99	81.2	-15.2	94.4	99
	4	78.3	-10.5	70.1	99	78.4	-14.6	84.6	100
	5	74.2	-8.4	56.1	99	75.0	-13.7	70.5	101
	6	70.0	-6.3	42.1	99	72.2	-11.7	52.0	103
	7	65.9	-4.2	28.1	99	68.1	-9.2	34.7	105
	8	61.7	-2.0	14.0	99	65.1	-5.6	18.7	107
Z	9	57.6	0.0	0.0	0	57.6	0.0	0.0	0
	10	55.1	0.2	-6.1	272	53.9	-0.1	-13.2	269
	11	52.7	0.4	-12.3	272	49.2	-1.6	-23.5	266
	12	50.3	0.6	-18.5	272	42.6	-0.2	-33.5	269
	13	47.9	0.8	-24.7	272	36.8	2.9	-41.4	274
	14	45.5	1.0	-30.9	272	34.5	5.3	-45.8	277
	15	43.1	1.2	-37.1	272	35.2	5.7	-48.2	277
	16	40.6	1.4	-43.3	272	36.5	4.2	-48.7	275
V	17	38.2	1.6	-49.5	272	38.2	1.6	-49.5	272
Y	18	90.8	-16.9	112.299	90.8	-16.9	112.299	0.0	0.0
	19	74.2	-8.4	56.1	99	75.0	-13.7	70.5	101
Z	20	57.6	0.0	0.0	0	57.6	0.0	0.0	0
	21	47.9	0.8	-24.7	272	36.8	2.9	-41.4	274
V	22	38.2	1.6	-49.5	272	38.2	1.6	-49.5	272

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Regularity
 $g^* = 6.9$

Yellow - Violet blue
rgb: Y - Z - V


Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 9.1$
 $\Delta E^*_{CIELAB} = 10.0$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.4$
 $\Delta E^*_{CIELAB} = 7.1$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

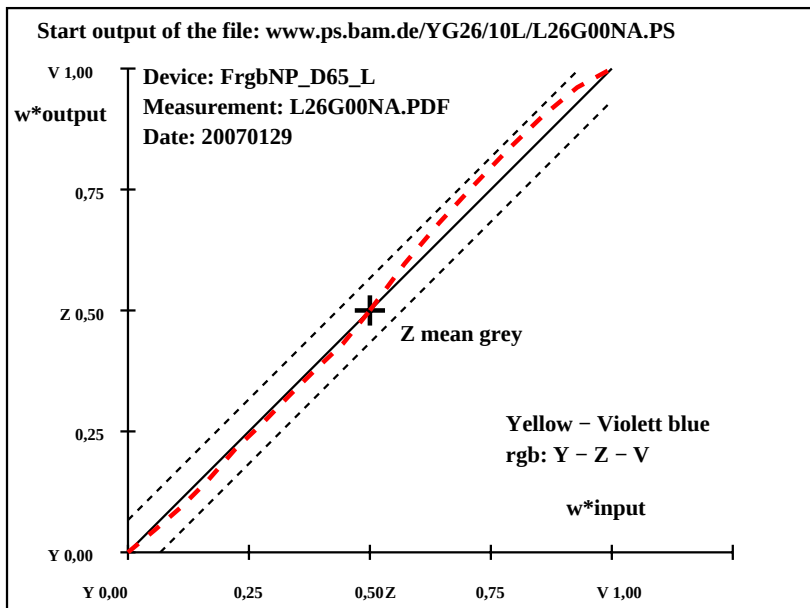

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

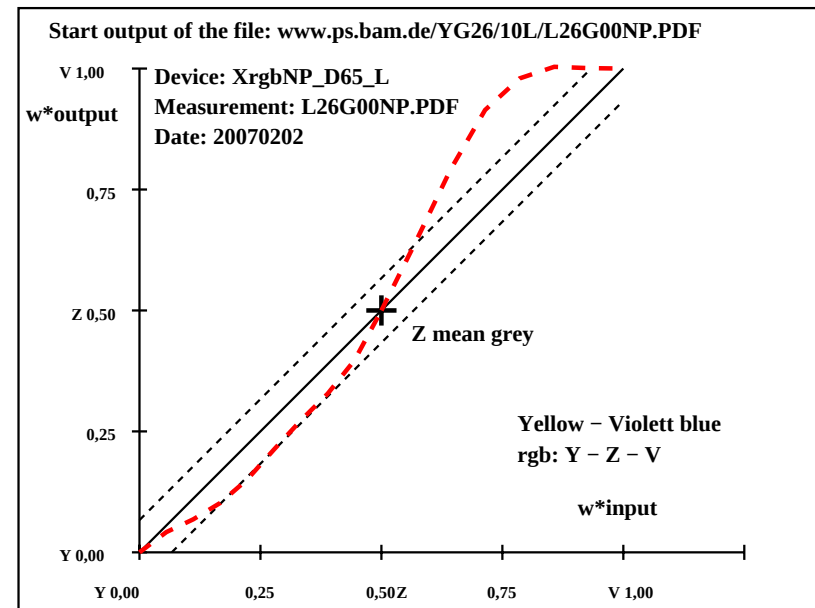


YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1		
L	1	44.9	-61.5	49.0	141	44.9	-61.5	49.0	141	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	46.6	-54.3	42.8	142	49.7	-59.8	45.3	143	3.0	
	3	48.3	-47.1	36.6	142	54.3	-56.7	40.4	145	5.9	
	4	50.0	-39.9	30.4	143	57.3	-51.4	35.8	145	7.3	
	5	51.8	-32.7	24.3	144	59.6	-43.8	29.2	146	7.8	
	6	53.5	-25.5	18.1	145	60.3	-35.8	24.2	146	6.8	
	7	55.2	-18.3	11.9	147	60.3	-26.4	16.3	148	5.1	
	8	56.9	-11.1	5.7	153	59.7	-15.7	8.1	153	2.8	
Z	9	58.6	-3.9	-0.4	187	58.6	-3.9	-0.4	187	0.0	Leaf green – Magenta red rgb: L – Z – M
	10	56.1	6.5	-4.7	324	57.3	9.3	-9.2	315	1.2	
	11	53.5	16.9	-8.9	332	55.7	23.8	-17.3	324	2.1	
	12	51.0	27.4	-13.2	334	54.5	37.0	-23.7	327	3.4	
	13	48.5	37.9	-17.4	335	53.1	49.6	-28.3	330	4.6	
	14	46.0	48.3	-21.7	336	50.9	60.9	-31.6	333	4.9	
	15	43.5	58.8	-25.9	336	47.7	70.0	-33.8	334	4.2	
	16	41.0	69.2	-30.2	336	43.0	76.2	-35.0	335	2.0	
M	17	38.5	79.7	-34.4	337	38.5	79.7	-34.4	337	0.0	Mean CIELAB difference (17 steps) $\Delta H^*_{CIELAB} = 9.0$ $\Delta E^*_{CIELAB} = 9.8$
	18	44.9	-61.5	49.0	141	44.9	-61.5	49.0	141	0.0	
L	19	51.8	-32.7	24.3	144	59.6	-43.8	29.2	146	7.8	Mean CIELAB difference (5 steps) $\Delta H^*_{CIELAB} = 5.6$ $\Delta E^*_{CIELAB} = 6.2$
	20	58.6	-3.9	-0.4	187	58.6	-3.9	-0.4	187	0.0	
Z	21	48.5	37.9	-17.4	335	53.1	49.6	-28.3	330	4.6	
	22	38.5	79.7	-34.4	337	38.5	79.7	-34.4	337	0.0	


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1						
L	1	47.5	-66.6	39.0	150	47.5	-66.6	39.0	150	0.0	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	48.8	-58.3	34.1	150	47.8	-65.5	38.7	149	-0.9	-7.1	4.6	8.6	8.6	
	3	50.1	-49.9	29.3	150	47.5	-66.1	38.0	150	-2.5	-16.1	8.7	18.4	18.6	
	4	51.4	-41.6	24.4	150	48.0	-65.8	38.5	150	-3.3	-24.1	14.1	28.0	28.2	
	5	52.7	-33.3	19.6	150	48.9	-58.8	35.8	149	-3.7	-25.5	16.3	30.3	30.5	
	6	54.0	-24.9	14.7	150	50.7	-47.1	27.3	150	-3.2	-22.1	12.6	25.5	25.7	
	7	55.3	-16.6	9.8	149	53.9	-31.5	18.3	150	-1.3	-14.8	8.5	17.2	17.2	
	8	56.6	-8.2	5.0	149	58.0	-15.1	13.8	138	1.4	-6.8	8.8	11.2	11.3	
Z	9	57.9	0.0	0.1	90	57.9	0.0	0.1	90	0.0	0.0	0.0	0.0	0.0	Leaf green – Magenta red rgb: L – Z – M
	10	56.4	8.9	-0.5	356	51.9	9.7	-10.6	312	-4.5	0.8	-10.0	10.1	11.1	
	11	54.9	17.9	-1.3	356	45.7	24.8	-17.1	325	-9.2	6.9	-15.7	17.3	19.6	
	12	53.4	26.8	-2.0	355	42.7	37.7	-19.1	333	-10.6	10.9	-17.0	20.3	22.9	
	13	51.9	35.8	-2.8	355	41.0	50.6	-17.3	341	-10.8	14.8	-14.5	20.8	23.5	
	14	50.4	44.7	-3.5	355	41.4	59.2	-14.0	347	-8.9	14.5	-10.4	17.9	20.1	
	15	48.9	53.6	-4.2	355	43.7	66.0	-11.3	350	-5.1	12.4	-7.0	14.3	15.2	
	16	47.4	62.6	-5.0	355	44.0	68.3	-8.5	353	-3.3	5.7	-3.4	6.7	7.5	
M	17	45.9	71.5	-5.7	355	45.9	71.5	-5.7	355	0.0	0.0	0.0	0.0	0.0	Mean CIELAB difference (17 steps) $\Delta H^*_{CIELAB} = 14.5$ $\Delta E^*_{CIELAB} = 15.3$
	18	47.5	-66.6	39.0	150	47.5	-66.6	39.0	150	0.0	0.0	0.0	0.0	0.0	
L	19	52.7	-33.3	19.6	150	48.9	-58.8	35.8	149	-3.7	-25.5	16.3	30.3	30.5	Mean CIELAB difference (5 steps) $\Delta H^*_{CIELAB} = 10.2$ $\Delta E^*_{CIELAB} = 10.8$
	20	57.9	0.0	0.1	90	57.9	0.0	0.1	90	0.0	0.0	0.0	0.0	0.0	
Z	21	51.9	35.8	-2.8	355	41.0	50.6	-17.3	341	-10.8	14.8	-14.5	20.8	23.5	
	22	45.9	71.5	-5.7	355	45.9	71.5	-5.7	355	0.0	0.0	0.0	0.0	0.0	

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

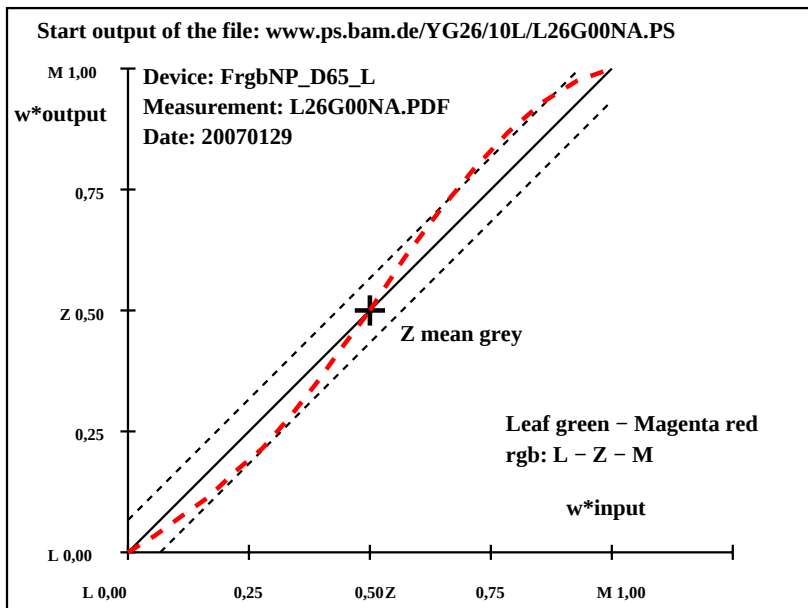

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

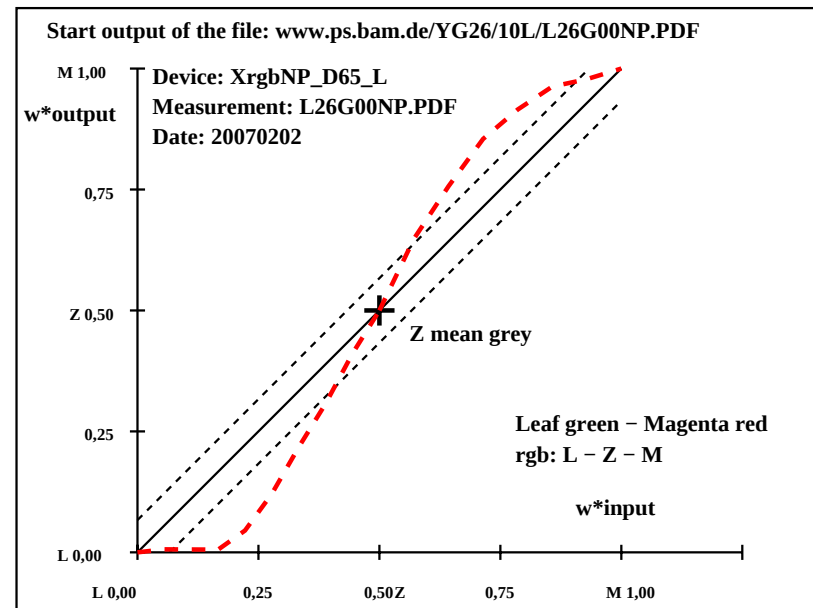

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out-ref		ΔH* ΔE*		Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G		
R	1	36.4	64.1	29.9	25	36.6	60.6	43.8	36	0.2	-3.4			
	2	39.7	55.6	49.6	42	80.1	2.0	103.6	89	40.4	-53.5	54.0	76.1	86.1
	3	51.3	40.1	65.4	59	68.2	18.3	86.4	78	16.8	-21.7	21.0	30.3	34.6
	4	64.7	22.0	83.7	75	53.2	39.5	66.1	59	-11.4	17.5	-17.5	24.8	27.3
J	5	84.0	-3.7	109.8	92	84.4	-3.9	110.0	92	0.4	-0.1	0.2	0.2	0.4
	6	66.6	-29.3	83.2	109	80.3	-12.7	104.2	97	13.7	16.6	21.0	26.8	30.1
	7	53.8	-47.7	63.5	127	68.5	-33.4	85.6	111	14.7	14.3	22.1	26.4	30.2
	8	44.8	-59.1	42.3	145	57.9	-48.4	69.3	125	13.1	10.7	27.0	29.1	31.9
G	9	48.0	-48.3	15.7	162	44.2	-61.5	48.9	142	-3.7	-13.1	33.2	35.7	35.9
	10	50.7	-39.2	-6.5	190	50.6	-48.4	-3.7	184	0.0	-9.1	2.8	9.6	9.6
C	11	52.8	-32.0	-24.1	217	53.9	-29.1	-31.5	227	1.1	2.9	-7.3	8.0	8.0
	12	48.0	-17.0	-35.8	245	43.5	-6.9	-41.4	260	-4.4	10.1	-5.5	11.6	12.4
B	13	38.9	1.5	-42.4	272	14.2	52.2	-60.3	311	-24.6	50.7	-17.8	53.8	59.2
	14	24.7	30.9	-52.9	300	27.8	65.1	-48.7	323	3.2	34.2	4.2	34.4	34.6
M	15	30.9	70.3	-43.0	329	38.7	79.5	-34.4	337	7.8	9.2	8.6	12.6	14.8
	16	37.6	72.0	-4.0	357	37.6	71.9	-15.5	348	0.0	0.0	-11.4	11.5	11.5
	17	36.4	64.1	29.9	25	35.8	61.1	45.0	36	-0.5	-2.9	15.1	15.4	15.4
	18	36.4	64.1	29.9	25	36.6	60.6	43.8	36	0.2	-3.4	13.9	14.3	14.3
J	19	84.0	-3.7	109.8	92	84.4	-3.9	110.0	92	0.4	-0.1	0.2	0.2	0.4
G	20	48.0	-48.3	15.7	162	44.2	-61.5	48.9	142	-3.7	-13.1	33.2	35.7	35.9
	21	38.9	1.5	-42.4	272	14.2	52.2	-60.3	311	-24.6	50.7	-17.8	53.8	59.2
R	22	36.4	64.1	29.9	25	35.8	61.1	45.0	36	-0.5	-2.9	15.1	15.4	15.4

Red-Yellow-Green-Blue
rgb: R-J-G-B-R

Mean CIELAB difference (17 steps)
ΔH*_{CIELAB} = 23.8
ΔE*_{CIELAB} = 26.9

Mean CIELAB difference (5 steps)
ΔH*_{CIELAB} = 20.8
ΔE*_{CIELAB} = 25.1

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out-ref			ΔH* ΔE*		Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G	
R	1	46.3	62.7	29.2	25	46.2	60.2	39.2	33	0.0	-2.4	10.0		
	2	50.5	52.8	47.1	42	47.0	58.3	45.9	38	-3.4	5.5	-1.1	5.6	6.6
	3	59.3	37.6	61.3	58	56.4	41.7	62.8	56	-2.8	4.1	1.5	4.4	5.2
	4	69.2	20.4	77.4	75	75.9	7.2	90.6	85	6.7	-13.1	13.2	18.6	19.8
J	5	83.1	-3.4	99.8	92	90.8	-16.8	112.4	99	7.7	-13.3	12.6	18.4	20.0
	6	77.6	-31.8	90.0	110	76.6	-31.4	88.0	110	-0.9	0.4	-1.9	2.0	2.2
	7	62.6	-48.6	64.6	127	55.6	-54.4	52.3	136	-6.9	-5.7	-12.2	13.6	15.3
	8	50.5	-62.0	44.3	145	48.6	-63.3	41.1	147	-1.8	-1.2	-3.1	3.5	3.9
G	9	46.8	-57.2	18.6	162	47.3	-65.0	38.4	149	0.6	-7.7	19.8	21.3	21.3
	10	48.4	-42.2	-7.0	190	48.2	-64.4	35.9	151	0.0	-22.1	43.0	48.4	48.4
C	11	49.4	-32.2	-24.2	217	52.1	-16.3	-52.3	253	2.6	15.9	-28.0	32.3	32.4
	12	50.6	-20.8	-43.7	245	46.0	-7.1	-50.1	262	-4.5	13.7	-6.3	15.1	15.8
B	13	38.4	1.7	-49.1	272	39.2	1.1	-49.2	271	0.7	-0.5	0.0	0.6	1.0
	14	40.5	21.6	-36.9	300	33.5	19.1	-43.3	294	-6.9	-2.4	-6.3	6.8	9.8
M	15	42.7	41.0	-25.0	329	46.2	71.5	-6.1	355	3.5	30.5	18.9	35.9	36.1
	16	46.1	70.7	-3.9	357	46.0	67.5	7.0	6	0.0	-3.1	11.0	11.5	11.5
	17	46.3	62.7	29.2	25	46.2	60.8	36.4	31	0.0	-1.8	7.2	7.4	7.4
R	18	46.3	62.7	29.2	25	46.2	60.2	39.2	33	0.0	-2.4	10.0	10.3	10.3
J	19	83.1	-3.4	99.8	92	90.8	-16.8	112.4	99	7.7	-13.3	12.6	18.4	20.0
G	20	46.8	-57.2	18.6	162	47.3	-65.0	38.4	149	0.6	-7.7	19.8	21.3	21.3
	21	38.4	1.7	-49.1	272	39.2	1.1	-49.2	271	0.7	-0.5	0.0	0.6	1.0
R	22	46.3	62.7	29.2	25	46.2	60.8	36.4	31	0.0	-1.8	7.2	7.4	7.4

Mean CIELAB difference (17 steps)

ΔH*_{CIELAB} = 14.6


ΔE*_{CIELAB} = 15.7

Mean CIELAB difference (5 steps)


ΔH*_{CIELAB} = 10.1

ΔE*_{CIELAB} = 12.0

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

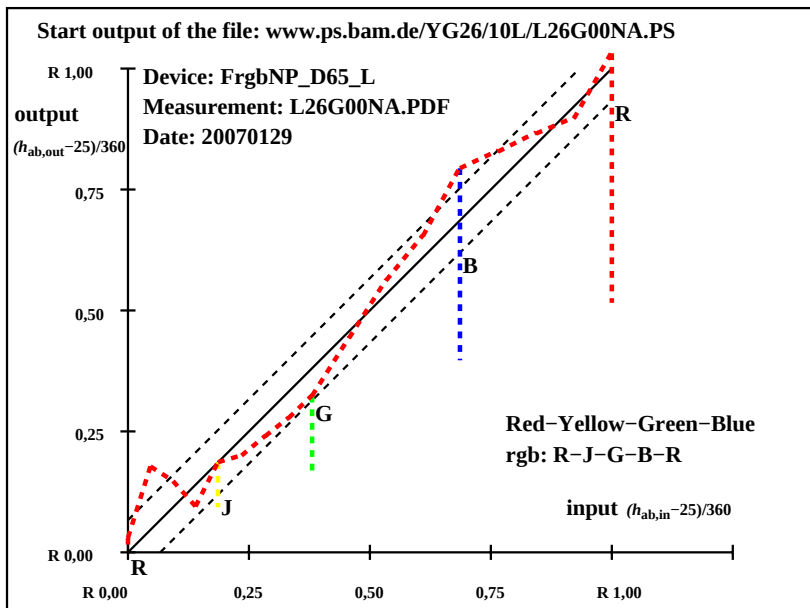

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

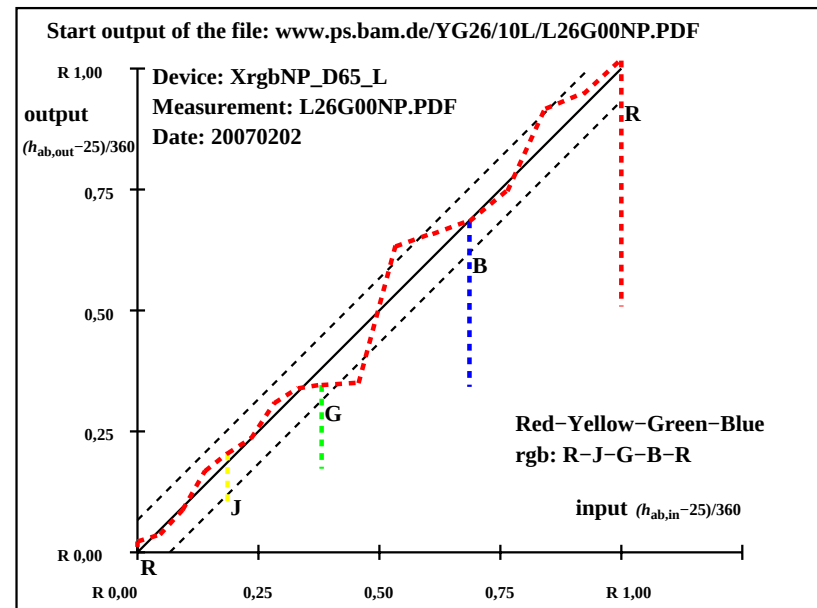


YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH* ΔE*	Start output S1
R	1	22.5	32.1	14.9	25	24.2 35.8 24.5 34	1.7 3.7 9.6 10.3 10.4	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	24.2	27.8	24.8	42	47.6 -2.3 55.8 92	23.4 -30.1 31.0 43.3 49.2	
	3	30.0	20.0	32.7	59	40.4 9.2 45.9 79	10.4 -10.7 13.2 17.1 20.0	
	4	36.7	11.0	41.8	75	31.9 23.1 34.8 56	-4.7 12.1 -6.9 14.0 14.8	
J	5	46.3	-1.8	54.9	92	54.9 -14.0 66.1 102	8.6 -12.1 11.2 16.5 18.6	
	6	37.6	-14.6	41.6	109	50.9 -23.6 59.8 112	13.3 -8.9 18.2 20.3 24.3	
	7	31.2	-23.8	31.7	127	46.5 -32.8 53.0 122	15.3 -8.9 21.3 23.1 27.7	
	8	26.7	-29.5	21.1	145	41.8 -42.0 45.4 133	15.1 -12.4 24.3 27.3 31.2	
G	9	28.3	-24.1	7.9	162	36.2 -49.6 37.9 143	7.9 -25.4 30.0 39.4 40.2	
	10	29.7	-19.5	-3.2	190	38.9 -41.3 5.4 173	9.2 -21.7 8.7 23.4 25.2	
C	11	30.7	-15.9	-12.0	217	40.8 -28.6 -15.6 209	10.1 -12.6 -3.5 13.2 16.6	(Red-Yellow-Green-Blue)n
	12	28.3	-8.5	-17.9	245	28.3 -1.5 -29.7 267	0.0 7.0 -11.7 13.7 13.7	
B	13	23.8	0.7	-21.2	272	11.9 34.7 -43.9 308	-11.8 34.0 -22.6 40.9 42.6	rgb: (R-J-G-B-R)n
	14	16.7	15.5	-26.4	300	18.8 42.6 -38.8 318	2.1 27.1 -12.3 29.8 29.9	
M	15	19.8	35.2	-21.4	329	26.0 52.6 -29.9 330	6.3 17.4 -8.4 19.4 20.4	Mean CIELAB difference (17 steps)
	16	23.1	36.0	-1.9	357	24.5 43.6 -10.0 347	1.3 7.6 -8.0 11.1 11.1	
R	17	22.5	32.1	14.9	25	23.0 35.3 23.8 34	0.4 3.2 8.9 9.4 9.4	ΔH* _{CIELAB} = 21.3 ΔE* _{CIELAB} = 23.8
	18	22.5	32.1	14.9	25	24.2 35.8 24.5 34	1.7 3.7 9.6 10.3 10.4	
J	19	46.3	-1.8	54.9	92	54.9 -14.0 66.1 102	8.6 -12.1 11.2 16.5 18.6	
G	20	28.3	-24.1	7.9	162	36.2 -49.6 37.9 143	7.9 -25.4 30.0 39.4 40.2	
B	21	23.8	0.7	-21.2	272	11.9 34.7 -43.9 308	-11.8 34.0 -22.6 40.9 42.6	Mean CIELAB difference (5 steps)
	22	22.5	32.1	14.9	25	23.0 35.3 23.8 34	0.4 3.2 8.9 9.4 9.4	
R	23	22.5	32.1	14.9	25	24.2 35.8 24.5 34	1.7 3.7 9.6 10.3 10.4	ΔH* _{CIELAB} = 21.4 ΔE* _{CIELAB} = 24.2
	24	22.5	32.1	14.9	25	24.2 35.8 24.5 34	1.7 3.7 9.6 10.3 10.4	


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out-ref		$\Delta H^* \Delta E^*$		Start output S1			
R	1	34.0	31.3	14.6	25	35.8	34.4	29.4	41	1.9	3.1	14.8	15.1	15.2	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	36.1	26.4	23.6	42	36.9	30.7	31.1	45	0.8	4.3	7.5	8.7	8.7	
	3	40.5	18.8	30.7	58	41.3	20.1	38.2	62	0.8	1.3	7.5	7.6	7.7	
	4	45.5	10.2	38.7	75	51.7	0.1	54.2	90	6.2	-10.0	15.5	18.5	19.5	
J	5	52.4	-1.6	49.9	92	59.6	-11.9	66.0	100	7.3	-10.2	16.1	19.1	20.4	
	6	49.6	-15.8	45.0	110	55.0	-21.3	57.0	111	5.4	-5.4	12.0	13.2	14.2	
	7	42.1	-24.2	32.3	127	45.6	-37.7	39.7	134	3.5	-13.4	7.4	15.4	15.7	
	8	36.1	-31.0	22.2	145	40.7	-47.2	30.7	147	4.6	-16.1	8.5	18.3	18.9	
G	9	34.2	-28.5	9.3	162	38.5	-49.9	26.9	152	4.2	-21.3	17.6	27.7	28.0	
	10	35.0	-21.1	-3.4	190	33.8	-38.0	16.0	157	-1.1	-16.8	19.5	25.9	25.9	
C	11	35.5	-16.0	-12.1	217	37.0	-19.8	-26.7	233	1.4	-3.7	-14.5	15.1	15.2	(Red-Yellow-Green-Blue)n rgb: (R-J-G-B-R)n
	12	36.1	-10.4	-21.8	245	32.2	-4.0	-35.3	263	-3.9	6.4	-13.4	14.9	15.4	
B	13	30.0	0.9	-24.5	272	28.4	1.4	-34.1	272	-1.5	0.5	-9.5	9.6	9.8	
	14	31.1	10.8	-18.4	300	26.0	15.0	-40.0	291	-4.9	4.2	-21.5	22.0	22.6	
M	15	32.2	20.5	-12.4	329	30.4	41.8	-20.6	334	-1.7	21.3	-8.1	22.8	22.9	Mean CIELAB difference (17 steps)
	16	33.9	35.4	-1.9	357	31.8	40.2	1.2	2	-2.0	4.8	3.2	5.8	6.2	
R	17	34.0	31.3	14.6	25	36.1	34.0	29.6	41	2.2	2.7	15.0	15.2	15.4	$\Delta H^*_{CIELAB} = 15.3$ $\Delta E^*_{CIELAB} = 16.6$
	18	34.0	31.3	14.6	25	35.8	34.4	29.4	41	1.9	3.1	14.8	15.1	15.2	
J	19	52.4	-1.6	49.9	92	59.6	-11.9	66.0	100	7.3	-10.2	16.1	19.1	20.4	
G	20	34.2	-28.5	9.3	162	38.5	-49.9	26.9	152	4.2	-21.3	17.6	27.7	28.0	
B	21	30.0	0.9	-24.5	272	28.4	1.4	-34.1	272	-1.5	0.5	-9.5	9.6	9.8	Mean CIELAB difference (5 steps)
	22	34.0	31.3	14.6	25	36.1	34.0	29.6	41	2.2	2.7	15.0	15.2	15.4	
															$\Delta E^*_{CIELAB} = 17.6$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

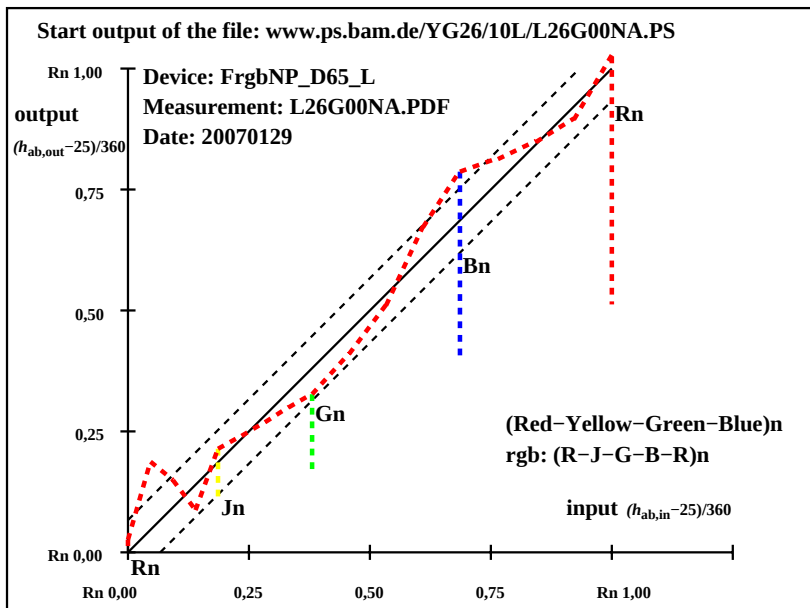

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

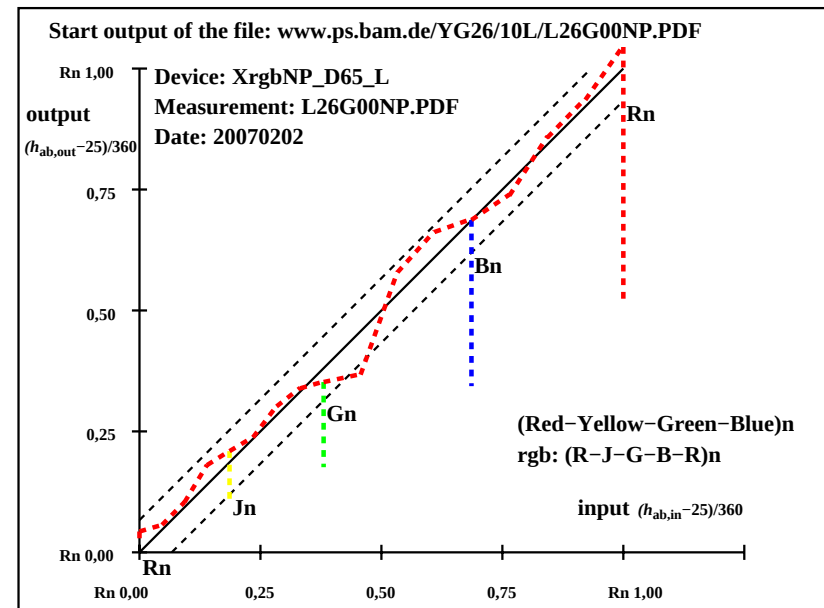

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH^*	ΔE^*	Start output S1						
R	1	64.5	32.1	14.9	25	70.6	25.0	11.9	25	6.0	-7.0	-2.9	7.7	9.8	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	66.2	27.8	24.8	42	90.4	-7.3	39.2	101	24.2	-35.1	14.4	38.0	45.1	
	3	72.0	20.0	32.7	59	84.4	2.3	30.8	86	12.4	-17.6	-1.8	17.8	21.7	
	4	78.7	11.0	41.8	75	77.7	13.1	22.0	59	-0.9	2.1	-19.7	19.9	20.0	
J	5	88.3	-1.8	54.9	92	90.4	-7.8	39.8	101	2.1	-5.9	-15.0	16.3	16.4	(Red-Yellow-Green-Blue)w rgb: (R-J-G-B-R)w
	6	79.6	-14.6	41.6	109	90.1	-8.4	39.7	102	10.4	6.2	-1.8	6.5	12.3	
	7	73.2	-23.8	31.7	127	86.2	-16.9	34.7	116	13.0	6.9	3.0	7.5	15.0	
	8	68.7	-29.5	21.1	145	80.7	-26.3	28.0	133	12.0	3.2	6.9	7.6	14.2	
G	9	70.3	-24.1	7.9	162	74.9	-33.7	21.4	148	4.6	-9.5	13.5	16.6	17.2	Mean CIELAB difference (17 steps) $\Delta H^*_{CIELAB} = 11.6$ $\Delta E^*_{CIELAB} = 15.2$
	10	71.7	-19.5	-3.2	190	77.6	-25.1	-5.3	192	5.9	-5.5	-2.0	5.9	8.4	
C	11	72.7	-15.9	-12.0	217	78.5	-20.5	-15.4	217	5.8	-4.5	-3.3	5.7	8.1	
	12	70.3	-8.5	-17.9	245	73.2	-10.3	-21.1	244	2.9	-1.7	-3.1	3.7	4.7	
B	13	65.8	0.7	-21.2	272	60.3	13.5	-32.8	292	-5.4	12.8	-11.5	17.3	18.1	Mean CIELAB difference (5 steps) $\Delta H^*_{CIELAB} = 11.6$ $\Delta E^*_{CIELAB} = 13.5$
	14	58.6	15.5	-26.4	300	68.1	29.4	-25.1	319	9.4	13.9	1.3	14.0	16.9	
M	15	61.8	35.2	-21.4	329	71.2	37.2	-21.4	330	9.5	2.0	0.0	2.0	9.7	
	16	65.1	36.0	-1.9	357	70.5	33.8	-12.7	339	5.3	-2.1	-10.7	11.0	12.2	
R	17	64.5	32.1	14.9	25	69.4	26.3	12.6	26	4.9	-5.7	-2.2	6.2	7.9	
R	18	64.5	32.1	14.9	25	70.6	25.0	11.9	25	6.0	-7.0	-2.9	7.7	9.8	
J	19	88.3	-1.8	54.9	92	90.4	-7.8	39.8	101	2.1	-5.9	-15.0	16.3	16.4	
G	20	70.3	-24.1	7.9	162	74.9	-33.7	21.4	148	4.6	-9.5	13.5	16.6	17.2	
B	21	65.8	0.7	-21.2	272	60.3	13.5	-32.8	292	-5.4	12.8	-11.5	17.3	18.1	
R	22	64.5	32.1	14.9	25	69.4	26.3	12.6	26	4.9	-5.7	-2.2	6.2	7.9	

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out-ref		ΔH^*	ΔE^*	Start output S1			
R	1	70.9	31.3	14.6	25	61.7	40.1	18.3	25	-9.1	8.8	3.7	9.5	13.2	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	73.0	26.4	23.6	42	70.5	23.3	29.4	52	-2.4	-3.0	5.8	6.6	7.1	
	3	77.4	18.8	30.7	58	78.0	9.4	42.3	77	0.6	-9.3	11.6	14.9	15.0	
	4	82.4	10.2	38.7	75	86.6	-4.7	54.9	95	4.2	-14.9	16.2	22.1	22.5	
J	5	89.3	-1.6	49.9	92	92.1	-16.1	74.7	102	2.9	-14.4	24.8	28.7	28.9	
	6	86.5	-15.8	45.0	110	84.8	-23.4	64.8	110	-1.6	-7.5	19.8	21.2	21.3	
	7	79.0	-24.2	32.3	127	72.7	-34.2	52.4	123	-6.2	-9.9	20.1	22.4	23.3	
G	8	73.0	-31.0	22.2	145	61.7	-46.1	41.5	138	-11.2	-15.0	19.3	24.6	27.0	
	9	71.1	-28.5	9.3	162	56.1	-53.3	38.6	144	-14.9	-24.7	29.3	38.4	41.2	
	10	71.9	-21.1	-3.4	190	59.5	-43.4	12.4	164	-12.3	-22.2	15.9	27.5	30.1	
C	11	72.4	-16.0	-12.1	217	60.8	-15.7	-38.9	248	-11.5	0.3	-26.7	26.8	29.3	
	12	73.0	-10.4	-21.8	245	62.9	-8.2	-28.6	254	-10.0	2.2	-6.7	7.1	12.4	
B	13	66.9	0.9	-24.5	272	58.8	-0.2	-35.4	270	-8.0	-1.1	-10.8	11.0	13.7	
	14	68.0	10.8	-18.4	300	54.8	23.8	-26.4	312	-13.1	13.0	-7.9	15.3	20.2	
M	15	69.1	20.5	-12.4	329	61.0	47.4	-11.6	346	-7.9	26.9	0.8	26.9	28.1	
	16	70.8	35.4	-1.9	357	59.0	43.8	-3.7	355	-11.7	8.4	-1.7	8.6	14.7	
R	17	70.9	31.3	14.6	25	63.0	38.0	17.6	25	-7.8	6.7	3.0	7.3	10.8	
R	18	70.9	31.3	14.6	25	61.7	40.1	18.3	25	-9.1	8.8	3.7	9.5	13.2	
J	19	89.3	-1.6	49.9	92	92.1	-16.1	74.7	102	2.9	-14.4	24.8	28.7	28.9	
G	20	71.1	-28.5	9.3	162	56.1	-53.3	38.6	144	-14.9	-24.7	29.3	38.4	41.2	
B	21	66.9	0.9	-24.5	272	58.8	-0.2	-35.4	270	-8.0	-1.1	-10.8	11.0	13.7	
R	22	70.9	31.3	14.6	25	63.0	38.0	17.6	25	-7.8	6.7	3.0	7.3	10.8	


Mean CIELAB difference (17 steps)

$\Delta H^*_{CIELAB} = 18.3$
 $\Delta E^*_{CIELAB} = 21.1$


Mean CIELAB difference (5 steps)

$\Delta H^*_{CIELAB} = 17.5$
 $\Delta E^*_{CIELAB} = 19.5$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

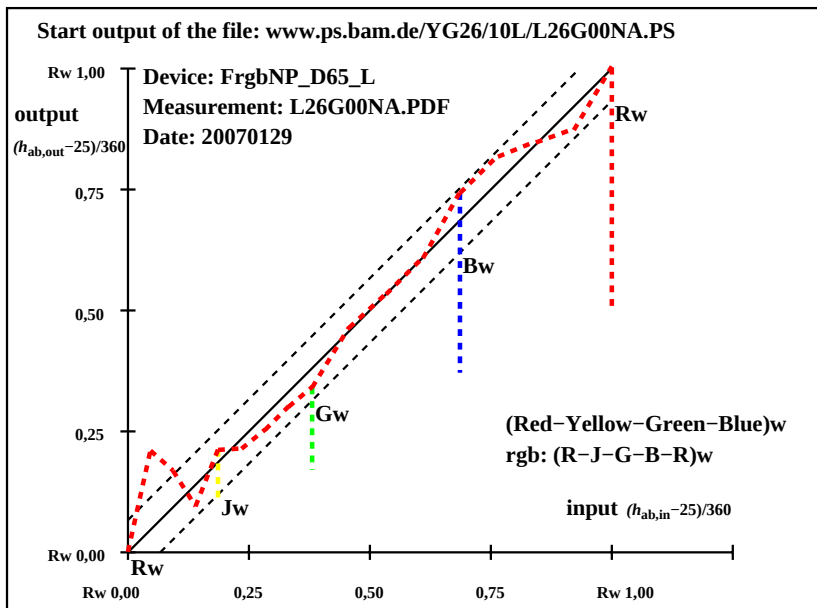

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

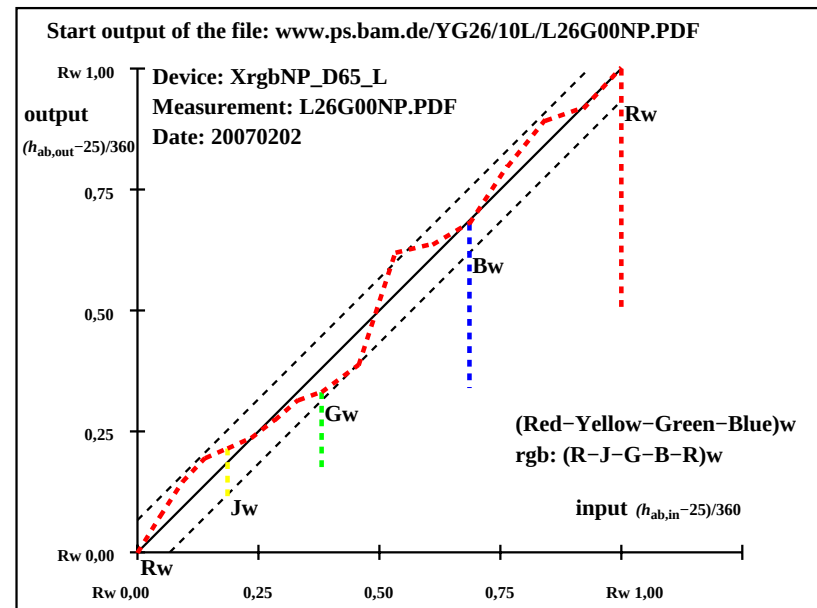

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	9.1	0.0	0.2	90	9.1	0.0	0.2
	2	14.4	0.0	0.2	90	14.6	0.3	-1.7
	3	19.6	0.0	0.2	90	21.7	-0.4	-2.7
	4	24.8	0.0	0.2	90	28.4	-1.8	-1.9
	5	30.0	0.0	0.2	90	35.5	-2.1	-2.3
	6	35.3	0.0	0.1	90	41.3	-2.6	-0.4
	7	40.5	0.0	0.1	90	46.8	-2.6	-0.7
	8	45.7	0.0	0.1	90	52.9	-3.7	-0.2
Z	9	51.0	0.0	0.1	90	58.3	-3.7	-0.8
	10	56.2	0.0	0.1	90	63.8	-3.2	-1.2
	11	61.4	0.0	0.1	90	69.8	-1.8	-1.5
	12	66.7	0.0	0.1	90	75.6	-0.8	-1.6
	13	71.9	0.0	0.1	90	81.6	0.0	-1.1
	14	77.1	0.0	0.0	90	87.1	0.0	0.0
	15	82.3	0.0	0.0	90	92.1	-0.6	1.1
	16	87.6	0.0	0.0	90	92.9	0.0	0.0
W	17	92.8	0.0	0.0	0	92.8	0.0	0.0
N	18	9.1	0.0	0.2	90	9.1	0.0	0.2
	19	30.0	0.0	0.2	90	35.5	-2.1	-2.3
Z	20	51.0	0.0	0.1	90	58.3	-3.7	-0.8
	21	71.9	0.0	0.1	90	81.6	0.0	-1.1
W	22	92.8	0.0	0.0	0	92.8	0.0	0.0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.81 - 9.12$
Regularity
 $g^* = 42.5$
Lightness gamut relative to offset
 $f^* = 108.1$
Black - White
000n: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.1$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 1.7$
 $\Delta E^*_{CIELAB} = 4.9$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	22.6	0.2	7.1	88	22.6	0.2	7.1
	2	27.2	0.2	6.7	88	25.1	0.3	7.2
	3	31.7	0.2	6.2	88	28.1	0.3	6.9
	4	36.3	0.2	5.8	88	33.3	0.2	6.3
	5	40.8	0.2	5.4	88	37.9	0.2	5.9
	6	45.4	0.1	4.9	88	43.2	0.1	5.3
	7	49.9	0.1	4.5	88	47.2	0.1	4.8
	8	54.5	0.1	4.1	88	52.6	0.1	4.4
Z	9	59.0	0.1	3.7	88	58.4	0.0	3.9
	10	63.6	0.1	3.2	88	63.4	0.1	3.2
	11	68.1	0.1	2.8	88	68.8	0.0	2.7
	12	72.7	0.1	2.4	88	73.5	0.0	2.5
	13	77.2	0.1	1.9	89	76.9	0.1	1.9
	14	81.8	0.0	1.5	89	81.7	0.0	1.6
	15	86.3	0.0	1.1	89	85.4	0.0	1.0
	16	90.9	0.0	0.6	89	88.9	0.0	0.7
W	17	95.4	0.0	0.2	90	95.4	0.0	0.2
N	18	22.6	0.2	7.1	88	22.6	0.2	7.1
	19	40.8	0.2	5.4	88	37.9	0.2	5.9
Z	20	59.0	0.1	3.7	88	58.4	0.0	3.9
	21	77.2	0.1	1.9	89	76.9	0.1	1.9
W	22	95.4	0.0	0.2	90	95.4	0.0	0.2

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.42 - 22.63$
Regularity
 $g^* = 74.4$
Lightness gamut relative to offset
 $f^* = 94.0$
Black - White
000n: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 1.4$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 0.8$
Mean colour reproduction index: $R^*_{ab,m} = 94$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

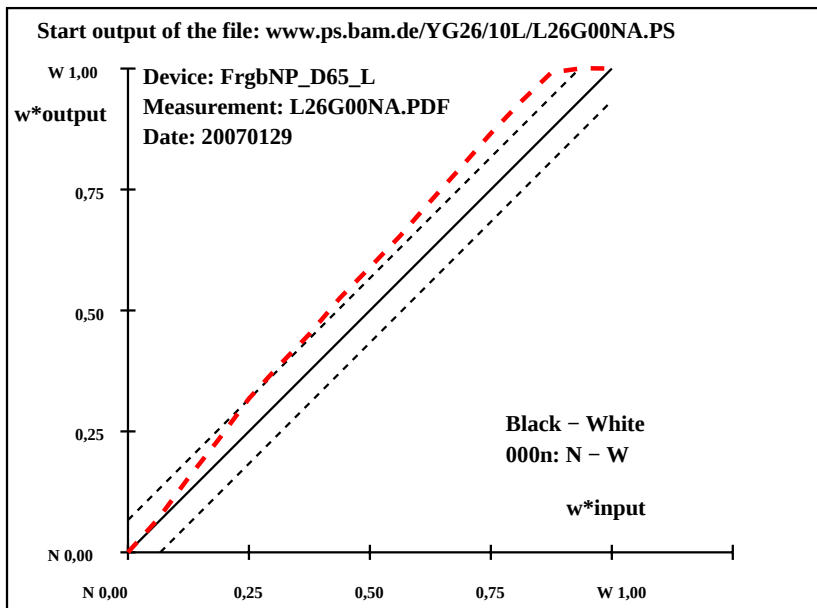

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

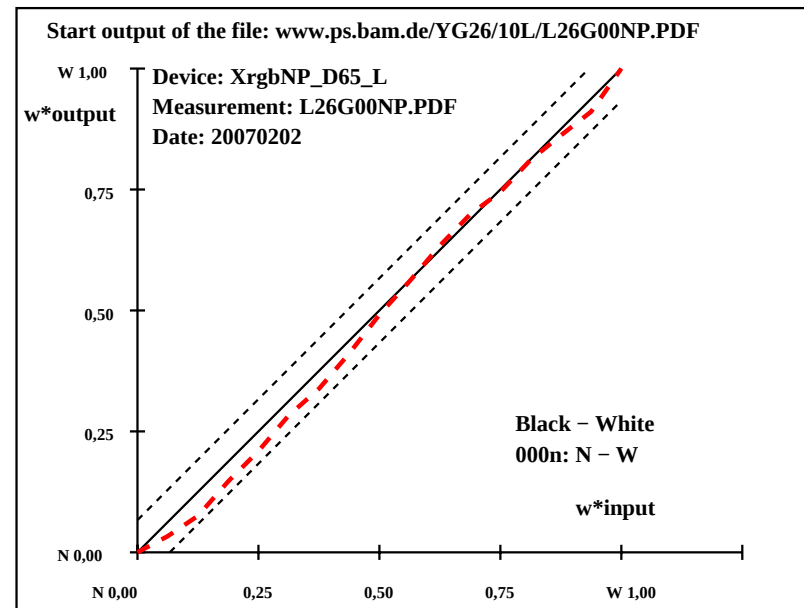

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.7	0.0	0.0	0	8.7	0.0	0.0
	2	13.9	0.0	0.0	0	13.9	0.7	-2.5
	3	19.1	0.0	0.0	0	20.8	-0.2	-3.9
	4	24.4	0.0	0.0	0	27.4	-1.8	-3.0
	5	29.6	0.0	0.0	0	34.4	-2.2	-3.4
	6	34.9	0.0	0.0	0	40.2	-2.7	-1.7
	7	40.1	0.0	0.0	0	45.9	-3.1	-1.5
	8	45.4	0.0	0.0	0	52.0	-3.9	-1.1
Z	9	50.6	0.0	0.0	0	57.5	-3.9	-1.5
	10	55.9	0.0	0.0	0	63.4	-3.1	-1.9
	11	61.1	0.0	0.0	0	69.1	-1.8	-2.1
	12	66.4	0.0	0.0	0	75.2	-0.6	-2.1
	13	71.6	0.0	0.0	0	81.2	0.1	-1.4
	14	76.9	0.0	0.0	0	86.9	0.0	-0.1
	15	82.1	0.0	0.0	0	92.0	-0.7	1.1
	16	87.4	0.0	0.0	0	92.7	0.0	0.0
W	17	92.6	0.0	0.0	0	92.6	0.0	0.0
N	18	8.7	0.0	0.0	0	8.7	0.0	0.0
	19	29.6	0.0	0.0	0	34.4	-2.2	-3.4
Z	20	50.6	0.0	0.0	0	57.5	-3.9	-1.5
	21	71.6	0.0	0.0	0	81.2	0.1	-1.4
W	22	92.6	0.0	0.0	0	92.6	0.0	0.0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.63 - 8.65$
Regularity
 $g^* = 44.4$
Lightness gamut relative to offset
 $f^* = 108.5$
Black - White
w: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.5$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.0$
 $\Delta E^*_{CIELAB} = 4.8$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	21.3	0.0	-0.1	243	21.3	0.0	0.0
	2	25.9	0.0	-0.1	242	24.0	0.0	270
	3	30.6	0.0	-0.1	240	26.6	0.0	0
	4	35.2	0.0	-0.1	238	32.1	0.0	0
	5	39.8	0.0	-0.1	236	36.8	0.0	0
	6	44.5	0.0	0.0	234	42.6	0.0	270
	7	49.1	0.0	0.0	231	47.2	0.0	0
	8	53.8	0.0	0.0	228	51.9	0.0	0
Z	9	58.4	0.0	0.0	225	56.8	0.0	0
	10	63.0	0.0	0.0	221	63.2	0.0	180
	11	67.7	0.0	0.0	217	67.4	0.0	0
	12	72.3	0.0	0.0	212	71.7	0.0	0
	13	77.0	0.0	0.0	207	75.9	0.0	0
	14	81.6	0.0	0.0	201	81.1	0.0	0
	15	86.2	0.0	0.0	194	85.1	0.0	0
	16	90.9	0.0	0.0	187	89.1	0.0	0
W	17	95.5	0.0	0.0	180	95.5	0.0	0
N	18	21.3	0.0	-0.1	243	21.3	0.0	0
	19	39.8	0.0	-0.1	236	36.8	0.0	0
Z	20	58.4	0.0	0.0	225	56.8	0.0	0
	21	77.0	0.0	0.0	207	75.9	0.0	0
W	22	95.5	0.0	0.0	180	95.5	0.0	0

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.51 - 21.27$
Regularity
 $g^* = 77.3$
Lightness gamut relative to offset
 $f^* = 95.9$
Black - White
w: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 1.5$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 1.1$
Mean colour reproduction index: $R^*_{ab,m} = 94$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

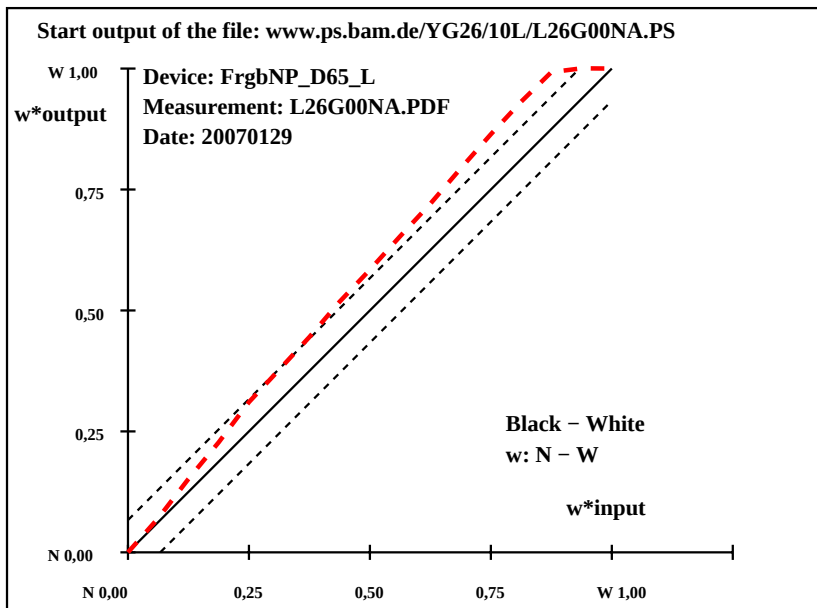

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

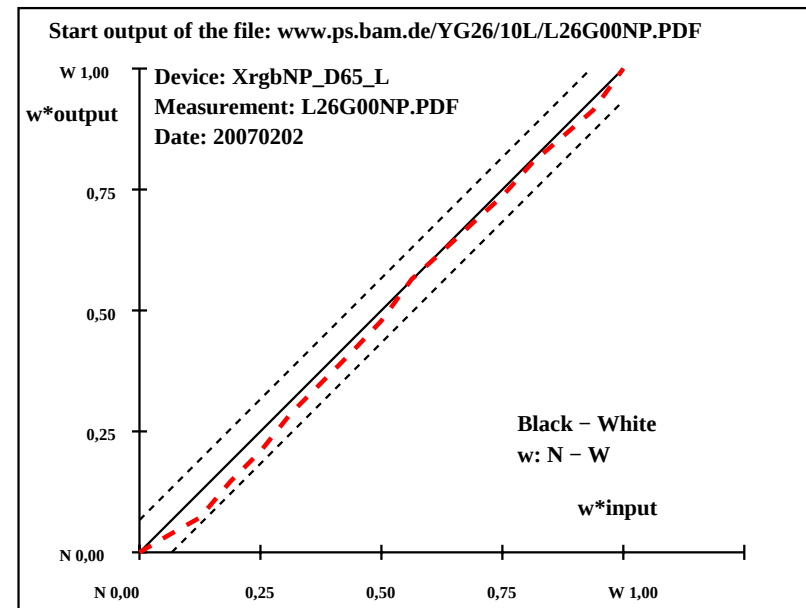


YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

See for similar files: <http://www.ps.bam.de/YE30/>; www.ps.bam.de/YE.HTM
 Technical information: <http://www.ps.bam.de> Version 2.1, io=1,1

T	i	LAB*a _{ref}		hab _{ref}	LAB*a _{out}		hab _{out}	LAB*a _{out} /c-refΔH* ΔE*				Start output S1			
N	1	9.1	0.0	0.2	90	9.1	0.0	0.2	90	0.0	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" ΔL* = 92.81 – 9.12 Regularity g* = 42.5
	2	14.4	0.0	0.2	90	14.6	0.3	-1.7	279	0.2	0.3	-1.9	2.0	2.0	
	3	19.6	0.0	0.2	90	21.7	-0.4	-2.7	260	2.1	-0.4	-2.9	3.0	3.7	
	4	24.8	0.0	0.2	90	28.4	-1.8	-1.9	226	3.6	-1.8	-2.1	2.9	4.6	
	5	30.0	0.0	0.2	90	35.5	-2.1	-2.3	227	5.5	-2.1	-2.5	3.4	6.4	
	6	35.3	0.0	0.1	90	41.3	-2.6	-0.4	190	6.1	-2.6	-0.5	2.8	6.7	
	7	40.5	0.0	0.1	90	46.8	-2.6	-0.7	197	6.3	-2.6	-0.8	2.9	6.9	
	8	45.7	0.0	0.1	90	52.9	-3.7	-0.2	185	7.2	-3.7	-0.3	3.8	8.1	
Z	9	51.0	0.0	0.1	90	58.3	-3.7	-0.8	193	7.3	-3.7	-0.9	3.9	8.3	Lightness gamut relative to offset f* = 108.1 Black – White cmy0: N – W Mean CIELAB difference (17 steps) ΔH*CIELAB = 2.1 ΔE*CIELAB = 6.3
	10	56.2	0.0	0.1	90	63.8	-3.2	-1.2	202	7.6	-3.2	-1.3	3.6	8.4	
	11	61.4	0.0	0.1	90	69.8	-1.8	-1.5	220	8.4	-1.8	-1.6	2.5	8.7	
	12	66.7	0.0	0.1	90	75.6	-0.8	-1.6	242	9.0	-0.8	-1.7	2.0	9.2	
	13	71.9	0.0	0.1	90	81.6	0.0	-1.1	270	9.7	0.0	-1.2	1.3	9.8	
	14	77.1	0.0	0.0	90	87.1	0.0	0.0	270	10.0	0.0	0.0	0.1	10.0	
	15	82.3	0.0	0.0	90	92.1	-0.6	1.1	122	9.8	-0.6	1.1	1.3	9.8	
	16	87.6	0.0	0.0	90	92.9	0.0	0.0	0	5.3	0.0	0.0	0.0	5.3	
W	17	92.8	0.0	0.0	0	92.8	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	
N	18	9.1	0.0	0.2	90	9.1	0.0	0.2	90	0.0	0.0	0.0	0.0	0.0	
	19	30.0	0.0	0.2	90	35.5	-2.1	-2.3	227	5.5	-2.1	-2.5	3.4	6.4	
Z	20	51.0	0.0	0.1	90	58.3	-3.7	-0.8	193	7.3	-3.7	-0.9	3.9	8.3	Mean CIELAB difference (5 steps) ΔH*CIELAB = 1.7 ΔE*CIELAB = 4.9
	21	71.9	0.0	0.1	90	81.6	0.0	-1.1	270	9.7	0.0	-1.2	1.3	9.8	
W	22	92.8	0.0	0.0	0	92.8	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	
Mean colour reproduction index: R* _{ab,m} = 72															

YE300-3N.: Device: ErgbNP D65 L: Measurement: L26G00NA.PDF: Date: 20070129

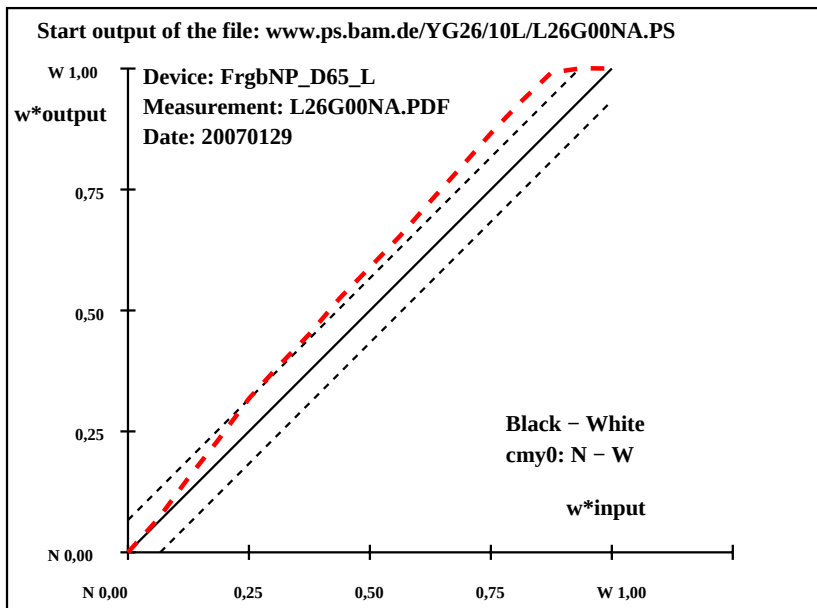


YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

BAM-test chart YE30; Relative colour reproduction, 2 devices
Measurement; 17 step colour scales; rgb input data, Page 23/24

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1										
N	1	26.9	0.0	0.0	0	26.9	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	Specification according to				
	2	31.2	0.0	0.0	0	29.2	-0.6	1.1	122	-1.9	-0.6	1.1	1.3	2.4	ISO/IEC 15775 Annex G				
	3	35.5	0.0	0.0	0	31.4	-1.5	1.0	148	-4.0	-1.5	1.0	1.9	4.5	and DIN 33866-1 Annex G				
	4	39.8	0.0	0.0	0	34.1	-1.7	0.5	164	-5.6	-1.7	0.5	1.9	6.0	relative CIELAB data used for "out"				
	5	44.1	0.0	0.0	0	36.2	-1.9	2.0	135	-7.7	-1.9	2.0	2.8	8.3	$\Delta L^* = 95.41 - 26.94$				
	6	48.3	0.0	0.0	0	38.8	-1.7	2.1	131	-9.4	-1.7	2.1	2.8	9.9	Regularity				
	7	52.6	0.0	0.0	0	42.6	-1.3	3.0	115	-9.9	-1.3	3.0	3.3	10.6	$g^* = 36.6$				
	8	56.9	0.0	0.0	0	47.3	-2.5	4.6	119	-9.5	-2.5	4.6	5.3	11.0					
	9	61.2	0.0	0.0	0	51.9	-1.7	6.1	106	-9.2	-1.7	6.1	6.4	11.3	Lightness gamut relative to offset				
Z	10	65.5	0.0	0.0	0	56.7	-1.3	7.2	101	-8.6	-1.3	7.2	7.3	11.4	$f^* = 88.5$				
	11	69.7	0.0	0.0	0	61.3	-0.7	7.2	96	-8.3	-0.7	7.2	7.2	11.1					
	12	74.0	0.0	0.0	0	65.4	-0.8	6.5	98	-8.6	-0.8	6.5	6.6	10.9	Black – White				
	13	78.3	0.0	0.0	0	70.0	-0.3	6.3	94	-8.2	-0.3	6.3	6.3	10.4	cmy0: N – W				
	14	82.6	0.0	0.0	0	75.3	-0.1	5.9	92	-7.2	-0.1	5.9	5.9	9.4					
	15	86.9	0.0	0.0	0	80.8	-1.2	5.2	104	-6.0	-1.2	5.2	5.4	8.1	Mean CIELAB difference (17 steps)				
	16	91.1	0.0	0.0	0	85.1	0.3	1.9	81	-5.9	0.3	1.9	1.9	6.3	$\Delta H^*_{CIELAB} = 3.9$				
	17	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 7.7$				
	18	26.9	0.0	0.0	0	26.9	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0					
Z	19	44.1	0.0	0.0	0	36.2	-1.9	2.0	135	-7.7	-1.9	2.0	2.8	8.3					
	20	61.2	0.0	0.0	0	51.9	-1.7	6.1	106	-9.2	-1.7	6.1	6.4	11.3	Mean CIELAB difference (5 steps)				
	21	78.3	0.0	0.0	0	70.0	-0.3	6.3	94	-8.2	-0.3	6.3	6.3	10.4	$\Delta H^*_{CIELAB} = 3.1$				
W	22	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 6.0$				
Mean colour reproduction index:																	$R^*_{ab,m} = 66$		

YE301-3N.: Device: XrgbNP D65 L: Measurement: L26G00NP.PDF: Date: 20070202

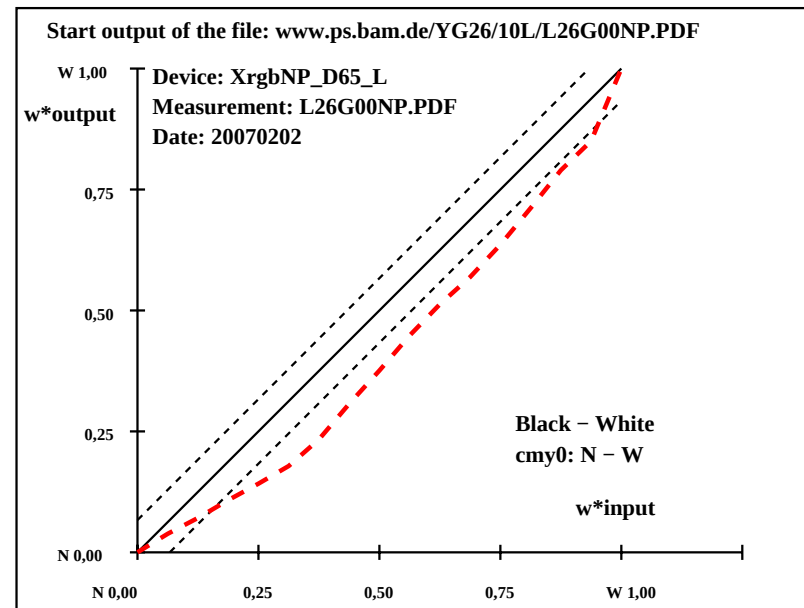

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

input: *rgb (->olv*) setrgbcolor*
output: no change compared to input

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.7	0.0	0.0	0	8.7	0.0	0.0
	2	13.9	0.0	0.0	0	13.9	0.7	-2.5
	3	19.1	0.0	0.0	0	20.8	-0.2	-3.9
	4	24.4	0.0	0.0	0	27.4	-1.8	-3.0
	5	29.6	0.0	0.0	0	34.4	-2.2	-3.4
	6	34.9	0.0	0.0	0	40.2	-2.7	-1.7
	7	40.1	0.0	0.0	0	45.9	-3.1	-1.5
	8	45.4	0.0	0.0	0	52.0	-3.9	-1.1
Z	9	50.6	0.0	0.0	0	57.5	-3.9	-1.5
	10	55.9	0.0	0.0	0	63.4	-3.1	-1.9
	11	61.1	0.0	0.0	0	69.1	-1.8	-2.1
	12	66.4	0.0	0.0	0	75.2	-0.6	-2.1
	13	71.6	0.0	0.0	0	81.2	0.1	-1.4
	14	76.9	0.0	0.0	0	86.9	0.0	-0.1
	15	82.1	0.0	0.0	0	92.0	-0.7	1.1
	16	87.4	0.0	0.0	0	92.7	0.0	0.0
W	17	92.6	0.0	0.0	0	92.6	0.0	0.0
N	18	8.7	0.0	0.0	0	8.7	0.0	0.0
	19	29.6	0.0	0.0	0	34.4	-2.2	-3.4
Z	20	50.6	0.0	0.0	0	57.5	-3.9	-1.5
	21	71.6	0.0	0.0	0	81.2	0.1	-1.4
W	22	92.6	0.0	0.0	0	92.6	0.0	0.0


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.63 - 8.65$
Regularity
 $g^* = 44.4$
Lightness gamut relative to offset
 $f^* = 108.5$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.5$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.0$
 $\Delta E^*_{CIELAB} = 4.8$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	21.7	0.0	0.0	0	21.7	0.0	0.0
	2	26.3	0.0	0.0	0	22.6	0.0	0.0
	3	30.9	0.0	0.0	0	24.8	0.0	0.1
	4	35.5	0.0	0.0	0	29.1	0.0	0.0
	5	40.1	0.0	0.0	0	34.7	0.0	0.0
	6	44.7	0.0	0.0	0	40.8	0.0	0.0
	7	49.3	0.0	0.0	0	45.6	0.0	0.2
	8	53.9	0.0	0.0	0	52.5	0.0	0.1
Z	9	58.6	0.0	0.0	0	58.7	0.0	0.2
	10	63.2	0.0	0.0	0	64.5	0.0	0.2
	11	67.8	0.0	0.0	0	69.4	0.0	0.2
	12	72.4	0.0	0.0	0	74.3	0.0	0.2
	13	77.0	0.0	0.0	0	79.1	0.0	0.1
	14	81.6	0.0	0.0	0	83.0	0.0	0.0
	15	86.2	0.0	0.0	0	86.4	0.0	0.1
	16	90.8	0.0	0.0	0	89.7	0.0	0.2
W	17	95.5	0.0	0.0	0	95.5	0.0	0.0
N	18	21.7	0.0	0.0	0	21.7	0.0	0.0
	19	40.1	0.0	0.0	0	34.7	0.0	0.0
Z	20	58.6	0.0	0.0	0	58.7	0.0	0.2
	21	77.0	0.0	0.0	0	79.1	0.0	0.1
W	22	95.5	0.0	0.0	0	95.5	0.0	0.0

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.46 - 21.66$
Regularity
 $g^* = 54.2$
Lightness gamut relative to offset
 $f^* = 95.3$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 2.4$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 1.6$
Mean colour reproduction index: $R^*_{ab,m} = 90$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

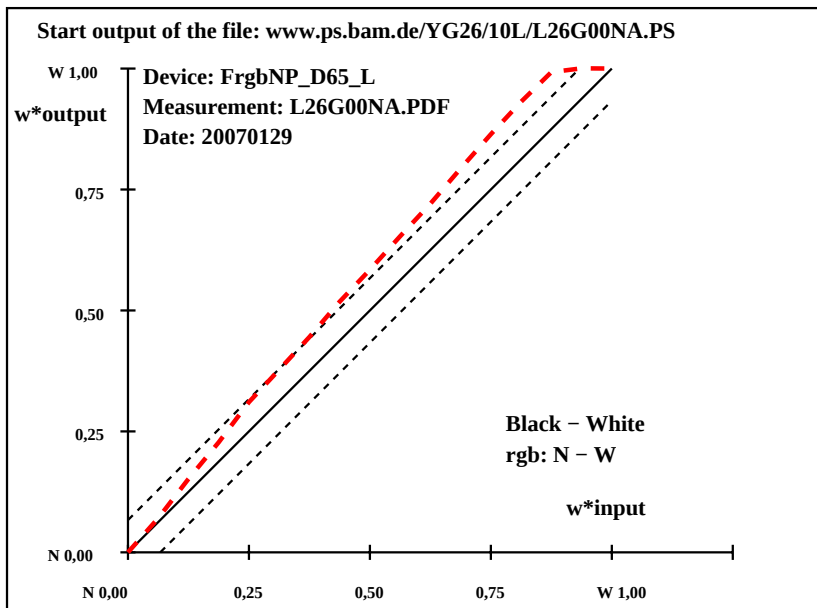

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

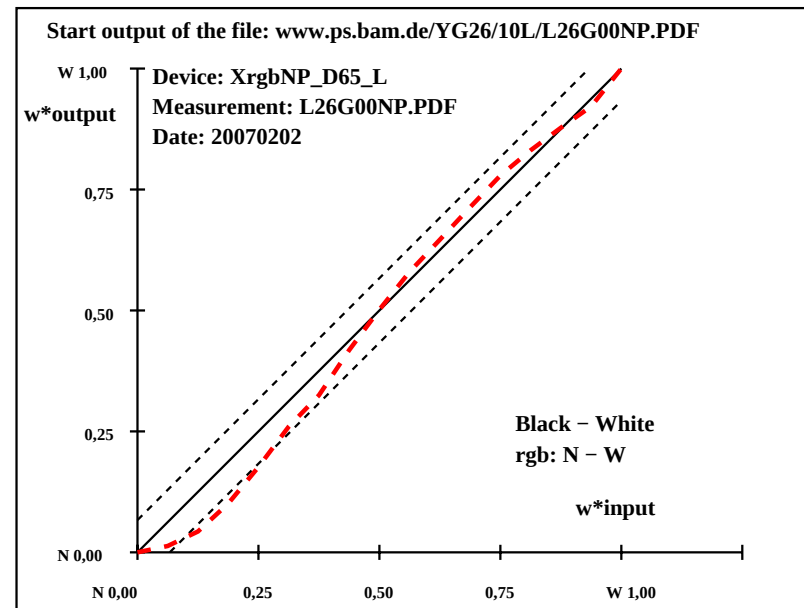

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202