


T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out/c-ref				ΔH^*	ΔE^*	Start output S1	
N	1	8.3	0.1	-0.1	297	8.3	0.1	-0.1	297	0.0	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 35.11 - 8.34$ Regularity $g^* = 28.8$ Lightness gamut relative to offset $l^* = 34.6$ Black – Orange red rgb: N – O Mean CIELAB difference (17 steps) $\Delta H^*_{CIELAB} = 4.4$ $\Delta E^*_{CIELAB} = 4.6$
	2	10.0	3.9	2.6	34	9.7	3.9	1.8	25	-0.3	0.0	-0.7	0.8	0.9	
	3	11.7	7.7	5.4	35	11.3	8.2	4.5	29	-0.3	0.5	-0.8	1.0	1.1	
	4	13.4	11.5	8.2	35	13.0	12.5	7.3	30	-0.3	1.0	-0.8	1.3	1.4	
	5	15.0	15.3	11.0	36	14.9	17.1	10.2	31	-0.1	1.8	-0.7	2.0	2.0	
	6	16.7	19.1	13.8	36	16.6	21.7	13.2	31	0.0	2.6	-0.5	2.7	2.7	
	7	18.4	22.9	16.6	36	18.4	26.0	16.1	32	0.0	3.1	-0.4	3.1	3.1	
	8	20.1	26.7	19.4	36	20.5	30.2	19.4	33	0.4	3.5	0.0	3.5	3.5	
	9	21.7	30.5	22.2	36	22.4	34.9	23.0	33	0.7	4.4	0.8	4.5	4.5	
	10	23.4	34.3	25.0	36	25.1	39.2	26.1	34	1.7	4.9	1.1	5.0	5.3	
	11	25.1	38.1	27.8	36	27.3	44.2	30.5	35	2.2	6.1	2.7	6.7	7.0	
	12	26.7	41.9	30.6	36	29.8	49.1	34.6	35	3.1	7.2	4.0	8.2	8.8	
	13	28.4	45.7	33.4	36	32.3	54.6	39.7	36	3.9	8.9	6.3	10.9	11.6	
	14	30.1	49.5	36.2	36	34.0	58.1	42.7	36	3.9	8.6	6.5	10.8	11.5	
	15	31.8	53.3	39.0	36	35.1	60.5	44.7	36	3.4	7.2	5.7	9.2	9.8	
	16	33.4	57.1	41.8	36	35.2	60.7	44.7	36	1.7	3.6	2.9	4.6	4.9	
	O	17	35.1	60.9	44.6	36	35.1	60.9	44.6	36	0.0	0.0	0.0	0.0	
N	18	8.3	0.1	-0.1	297	8.3	0.1	-0.1	297	0.0	0.0	0.0	0.0	0.0	
	19	15.0	15.3	11.0	36	14.9	17.1	10.2	31	-0.1	1.8	-0.7	2.0	2.0	
	20	21.7	30.5	22.2	36	22.4	34.9	23.0	33	0.7	4.4	0.8	4.5	4.5	
	21	28.4	45.7	33.4	36	32.3	54.6	39.7	36	3.9	8.9	6.3	10.9	11.6	
O	22	35.1	60.9	44.6	36	35.1	60.9	44.6	36	0.0	0.0	0.0	0.0	0.0	
Mean colour reproduction index:														$R^*_{ab,m} = 80$	


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1						
N	1	22.0	0.0	0.0	0	22.0	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out"				
	2	23.5	3.8	2.4	32	21.6	2.1	-0.4	347	-1.9		-1.6	-2.8	3.3	3.9
	3	25.1	7.6	4.7	32	21.6	4.8	0.7	8	-3.3		-2.7	-3.9	4.9	6.0
	4	26.6	11.3	7.1	32	23.6	8.5	4.2	26	-2.9		-2.7	-2.8	4.1	5.1
	5	28.1	15.1	9.5	32	26.4	13.3	9.9	37	-1.6		-1.7	0.4	1.9	2.5
	6	29.6	18.9	11.8	32	30.4	16.7	18.0	47	0.8		-2.1	6.2	6.6	6.6
	7	31.1	22.7	14.2	32	33.1	22.8	23.4	46	1.9		0.1	9.2	9.2	9.4
	8	32.7	26.5	16.5	32	34.7	28.2	27.1	44	2.0		1.7	10.6	10.7	10.9
	9	34.2	30.3	18.9	32	36.4	33.4	29.7	42	2.2		3.2	10.8	11.3	11.5
	10	35.7	34.0	21.3	32	37.5	37.3	32.0	41	1.8		3.3	10.7	11.2	11.4
	11	37.2	37.8	23.6	32	38.7	41.6	34.0	39	1.5		3.8	10.4	11.0	11.1
	12	38.7	41.6	26.0	32	39.9	44.7	35.5	38	1.2		3.1	9.5	10.0	10.1
	13	40.2	45.4	28.4	32	41.4	48.6	36.7	37	1.2		3.2	8.4	9.0	9.0
	14	41.8	49.2	30.7	32	42.9	52.1	38.2	36	1.2		2.9	7.5	8.0	8.1
	15	43.3	52.9	33.1	32	44.3	54.9	38.0	35	1.0		2.0	4.9	5.3	5.4
	16	44.8	56.7	35.4	32	45.6	58.3	38.1	33	0.8		1.6	2.7	3.1	3.2
O	17	46.3	60.5	37.8	32	46.3	60.5	37.8	32	0.0	0.0	0.0	0.0	0.0	
N	18	22.0	0.0	0.0	0	22.0	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	
	19	28.1	15.1	9.5	32	26.4	13.3	9.9	37	-1.6	-1.7	0.4	1.9	2.5	
	20	34.2	30.3	18.9	32	36.4	33.4	29.7	42	2.2	3.2	10.8	11.3	11.5	
	21	40.2	45.4	28.4	32	41.4	48.6	36.7	37	1.2	3.2	8.4	9.0	9.0	
O	22	46.3	60.5	37.8	32	46.3	60.5	37.8	32	0.0	0.0	0.0	0.0	0.0	
Mean colour reproduction index:										$R^*_{ab,m} = 71$					

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

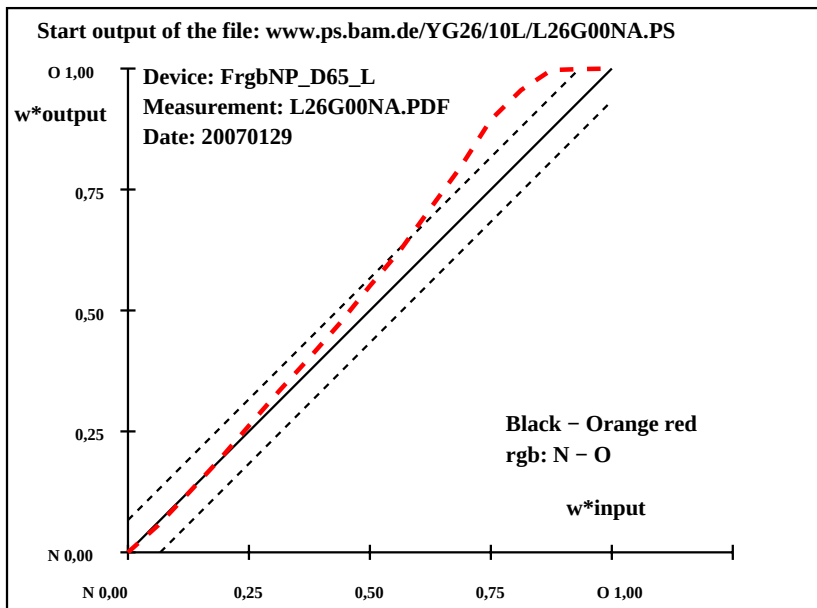

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

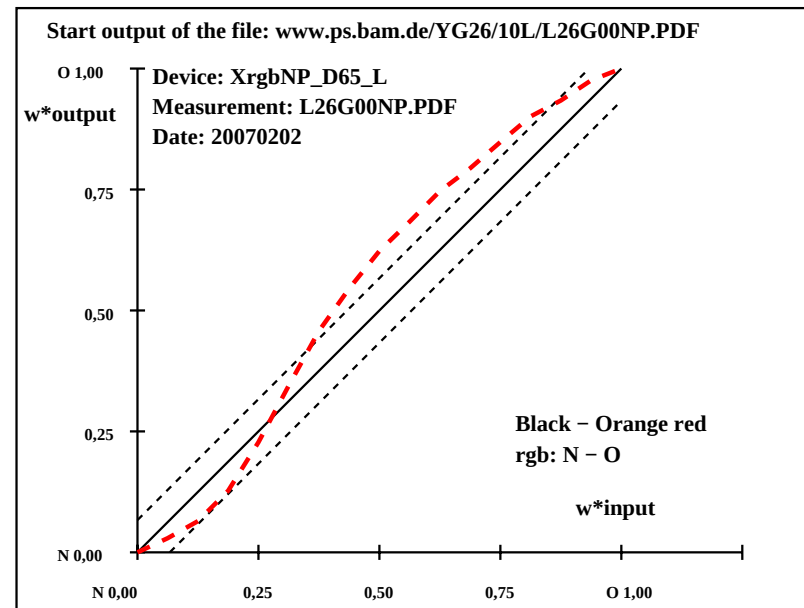

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202