

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.8	0.1	0.0	315	8.8	0.1	0.0
	2	11.6	-1.6	-2.0	230	12.3	-2.8	-4.2
	3	14.4	-3.4	-4.0	229	17.2	-7.3	-7.4
	4	17.2	-5.3	-5.9	228	21.8	-12.4	-8.6
	5	20.0	-7.1	-7.9	228	26.6	-15.9	-10.8
	6	22.8	-8.9	-9.9	228	30.0	-20.0	-11.4
	7	25.6	-10.7	-11.9	228	33.5	-22.9	-12.8
	8	28.4	-12.5	-13.9	228	37.3	-26.2	-14.1
	9	31.2	-14.4	-15.9	228	40.5	-28.1	-16.2
	10	34.0	-16.2	-17.8	228	43.4	-29.2	-18.7
	11	36.8	-18.0	-19.8	228	46.1	-29.5	-21.7
	12	39.6	-19.8	-21.8	228	48.4	-29.5	-24.5
	13	42.4	-21.6	-23.8	228	50.4	-29.4	-27.3
	14	45.2	-23.4	-25.8	228	52.1	-29.6	-29.1
	15	48.0	-25.3	-27.7	228	53.4	-29.8	-30.6
	16	50.8	-27.1	-29.7	228	53.7	-29.0	-31.6
C	17	53.6	-28.9	-31.7	228	53.6	-28.9	-31.7
N	18	8.8	0.1	0.0	315	8.8	0.1	0.0
	19	20.0	-7.1	-7.9	228	26.6	-15.9	-10.8
	20	31.2	-14.4	-15.9	228	40.5	-28.1	-16.2
	21	42.4	-21.6	-23.8	228	50.4	-29.4	-27.3
C	22	53.6	-28.9	-31.7	228	53.6	-28.9	-31.7


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 53.56 - 8.82$
Regularity
 $g^* = 18.1$
Lightness gamut relative to offset
 $f^* = 57.8$
Black - Cyan blue
rgb: N - C
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 7.9$
 $\Delta E^*_{CIELAB} = 9.8$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.3$
 $\Delta E^*_{CIELAB} = 7.9$
Mean colour reproduction index: $R^*_{ab,m} = 57$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	20.7	0.0	-0.2	252	20.7	0.0	-0.2
	2	22.5	-0.9	-3.5	254	20.3	-1.1	-4.3
	3	24.4	-1.9	-6.8	254	20.6	-1.8	-7.7
	4	26.3	-2.8	-10.1	254	22.7	-3.8	-12.9
	5	28.2	-3.8	-13.4	254	26.0	-6.8	-16.3
	6	30.1	-4.7	-16.7	254	27.8	-10.9	-18.1
	7	32.0	-5.6	-20.0	254	30.1	-15.0	-19.1
	8	33.9	-6.6	-23.3	254	32.7	-17.1	-22.4
	9	35.8	-7.5	-26.6	254	36.5	-19.8	-26.1
	10	37.6	-8.4	-29.8	254	39.6	-21.8	-29.3
	11	39.5	-9.4	-33.1	254	42.6	-22.9	-33.0
	12	41.4	-10.3	-36.4	254	45.4	-24.4	-35.7
	13	43.3	-11.3	-39.7	254	46.9	-24.6	-38.5
	14	45.2	-12.2	-43.0	254	48.3	-24.7	-40.3
	15	47.1	-13.1	-46.3	254	48.3	-23.6	-41.4
	16	49.0	-14.1	-49.6	254	49.3	-22.8	-43.3
C	17	50.9	-15.0	-52.9	254	50.9	-15.0	-52.9
N	18	20.7	0.0	-0.2	252	20.7	0.0	-0.2
	19	28.2	-3.8	-13.4	254	26.0	-6.8	-16.3
	20	35.8	-7.5	-26.6	254	36.5	-19.8	-26.1
	21	43.3	-11.3	-39.7	254	46.9	-24.6	-38.5
C	22	50.9	-15.0	-52.9	254	50.9	-15.0	-52.9

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 50.86 - 20.66$
Regularity
 $g^* = 38.2$
Lightness gamut relative to offset
 $f^* = 39.0$
Black - Cyan blue
rgb: N - C
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 8.1$
 $\Delta E^*_{CIELAB} = 8.6$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.0$
 $\Delta E^*_{CIELAB} = 6.2$
Mean colour reproduction index: $R^*_{ab,m} = 63$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

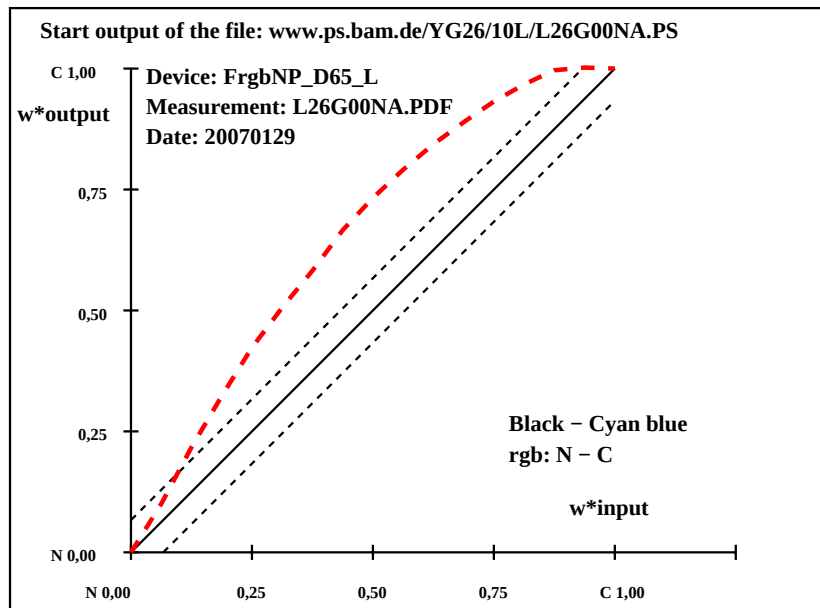

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

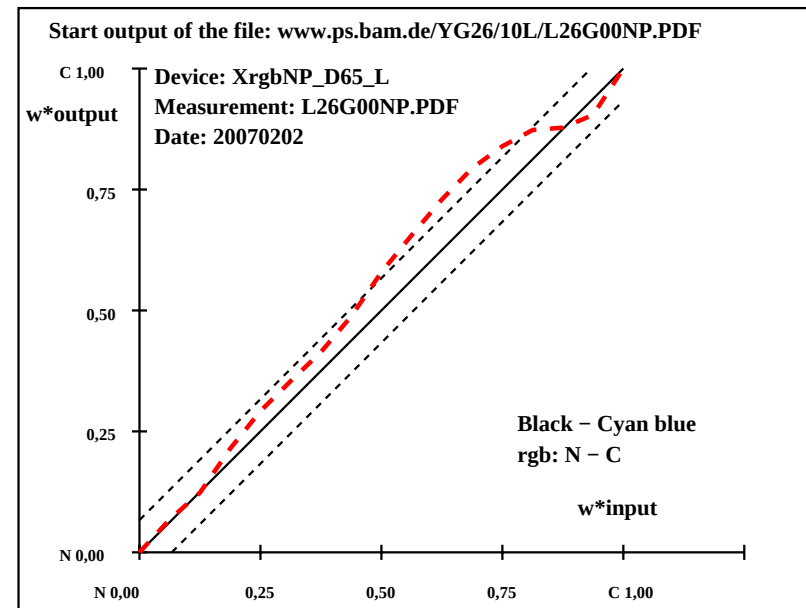

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202