

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.9	0.0	0.2	90	8.9	0.0	0.2
	2	10.7	5.0	-1.9	338	10.6	8.1	-6.4
	3	12.6	10.0	-4.1	337	12.8	16.4	-12.6
	4	14.4	14.9	-6.2	337	15.1	23.4	-16.7
	5	16.2	19.9	-8.4	337	17.6	30.4	-20.9
	6	18.1	24.9	-10.6	337	19.6	36.3	-23.0
	7	19.9	29.9	-12.8	337	21.6	41.9	-25.9
	8	21.7	34.9	-14.9	337	23.8	47.6	-28.4
	9	23.6	39.9	-17.1	337	25.9	52.8	-30.6
	10	25.4	44.8	-19.3	337	28.2	58.5	-33.0
	11	27.2	49.8	-21.5	337	30.5	63.6	-34.3
	12	29.1	54.8	-23.6	337	33.0	68.5	-35.1
	13	30.9	59.8	-25.8	337	35.5	72.8	-34.8
	14	32.7	64.8	-28.0	337	37.0	76.4	-34.6
	15	34.6	69.7	-30.1	337	38.2	78.7	-34.3
	16	36.4	74.7	-32.3	337	38.3	79.5	-34.6
M	17	38.2	79.7	-34.5	337	38.2	79.7	-34.5
N	18	8.9	0.0	0.2	90	8.9	0.0	0.2
	19	16.2	19.9	-8.4	337	17.6	30.4	-20.9
	20	23.6	39.9	-17.1	337	25.9	52.8	-30.6
	21	30.9	59.8	-25.8	337	35.5	72.8	-34.8
M	22	38.2	79.7	-34.5	337	38.2	79.7	-34.5


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 38.24 - 8.91$
Regularity
 $g^* = 29.3$
Lightness gamut relative to offset
 $f^* = 37.9$
Black - Magenta red
rgb: N - M
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 12.8$
 $\Delta E^*_{CIELAB} = 13.1$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 10.2$
 $\Delta E^*_{CIELAB} = 10.3$
Mean colour reproduction index: $R^*_{ab,m} = 43$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	20.8	0.0	-0.2	252	20.8	0.0	-0.2
	2	22.3	4.4	-0.6	351	19.5	2.0	-4.1
	3	23.9	8.8	-1.0	353	19.9	6.6	-5.9
	4	25.5	13.3	-1.3	354	21.8	15.4	-10.0
	5	27.1	17.8	-1.7	354	23.7	22.3	-13.6
	6	28.7	22.2	-2.1	354	25.2	28.4	-16.7
	7	30.3	26.7	-2.5	355	27.0	32.9	-18.2
	8	31.9	31.1	-2.8	355	29.2	37.5	-19.3
	9	33.5	35.6	-3.2	355	30.7	41.7	-19.2
	10	35.1	40.1	-3.6	355	32.6	45.5	-18.5
	11	36.7	44.5	-4.0	355	34.8	49.9	-16.7
	12	38.2	49.0	-4.3	355	37.1	54.5	-15.7
	13	39.8	53.5	-4.7	355	39.3	58.9	-12.8
	14	41.4	57.9	-5.1	355	41.7	63.0	-11.6
	15	43.0	62.4	-5.5	355	43.6	66.7	-10.1
	16	44.6	66.8	-5.8	355	44.4	68.1	-9.1
M	17	46.2	71.3	-6.2	355	46.2	71.3	-6.2
N	18	20.8	0.0	-0.2	252	20.8	0.0	-0.2
	19	27.1	17.8	-1.7	354	23.7	22.3	-13.6
	20	33.5	35.6	-3.2	355	30.7	41.7	-19.2
	21	39.8	53.5	-4.7	355	39.3	58.9	-12.8
M	22	46.2	71.3	-6.2	355	46.2	71.3	-6.2

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 46.19 - 20.76$
Regularity
 $g^* = 34.3$
Lightness gamut relative to offset
 $f^* = 32.9$
Black - Magenta red
rgb: N - M
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 10.0$
 $\Delta E^*_{CIELAB} = 10.2$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 7.9$
 $\Delta E^*_{CIELAB} = 8.1$
Mean colour reproduction index: $R^*_{ab,m} = 55$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

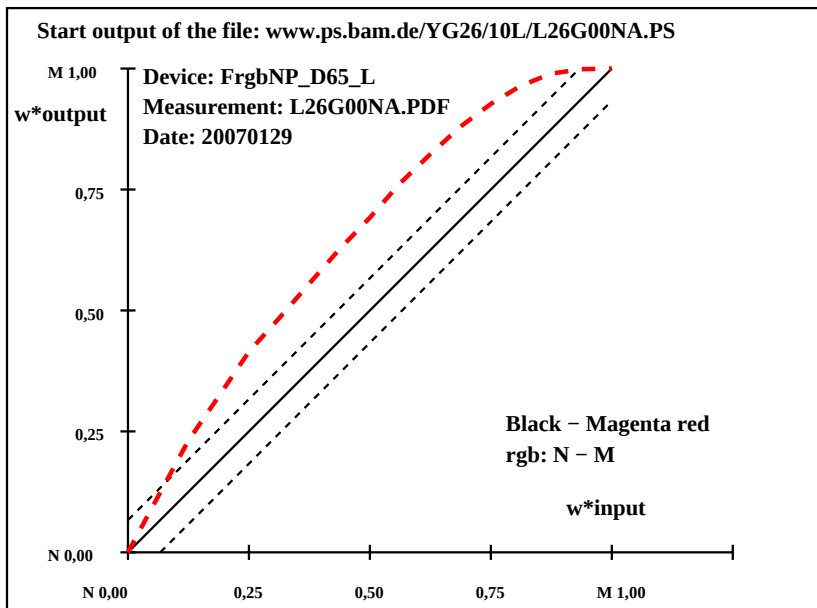

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

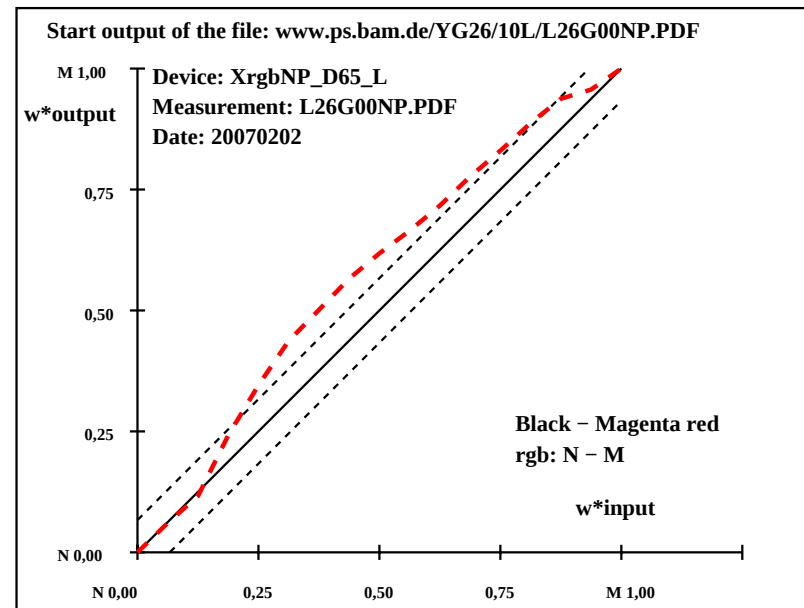

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202