


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH* ΔE*	Start output S1
R	1	36.4	64.1	29.9	25	36.6 60.6 43.8 36	0.2 -3.4 13.9 14.3 14.3	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	39.7	55.6	49.6	42	80.1 2.0 103.6 89	40.4 -53.5 54.0 76.1 86.1	
	3	51.3	40.1	65.4	59	68.2 18.3 86.4 78	16.8 -21.7 21.0 30.3 34.6	
	4	64.7	22.0	83.7	75	53.2 39.5 66.1 59	-11.4 17.5 -17.5 24.8 27.3	
J	5	84.0	-3.7	109.8	92	84.4 -3.9 110.0 92	0.4 -0.1 0.2 0.2 0.4	
	6	66.6	-29.3	83.2	109	80.3 -12.7 104.2 97	13.7 16.6 21.0 26.8 30.1	
	7	53.8	-47.7	63.5	127	68.5 -33.4 85.6 111	14.7 14.3 22.1 26.4 30.2	
	8	44.8	-59.1	42.3	145	57.9 -48.4 69.3 125	13.1 10.7 27.0 29.1 31.9	
G	9	48.0	-48.3	15.7	162	44.2 -61.5 48.9 142	-3.7 -13.1 33.2 35.7 35.9	
	10	50.7	-39.2	-6.5	190	50.6 -48.4 -3.7 184	0.0 -9.1 2.8 9.6 9.6	
C	11	52.8	-32.0	-24.1	217	53.9 -29.1 -31.5 227	1.1 2.9 -7.3 8.0 8.0	
	12	48.0	-17.0	-35.8	245	43.5 -6.9 -41.4 260	-4.4 10.1 -5.5 11.6 12.4	Red- Yellow-Green-Blue rgb: R-J-G-B-R
B	13	38.9	1.5	-42.4	272	14.2 52.2 -60.3 311	-24.6 50.7 -17.8 53.8 59.2	
	14	24.7	30.9	-52.9	300	27.8 65.1 -48.7 323	3.2 34.2 4.2 34.4 34.6	
M	15	30.9	70.3	-43.0	329	38.7 79.5 -34.4 337	7.8 9.2 8.6 12.6 14.8	
	16	37.6	72.0	-4.0	357	37.6 71.9 -15.5 348	0.0 0.0 -11.4 11.5 11.5	Mean CIELAB difference (17 steps)
	17	36.4	64.1	29.9	25	35.8 61.1 45.0 36	-0.5 -2.9 15.1 15.4 15.4	ΔH* _{CIELAB} = 23.8
	18	36.4	64.1	29.9	25	36.6 60.6 43.8 36	0.2 -3.4 13.9 14.3 14.3	ΔE* _{CIELAB} = 26.9
J	19	84.0	-3.7	109.8	92	84.4 -3.9 110.0 92	0.4 -0.1 0.2 0.2 0.4	
G	20	48.0	-48.3	15.7	162	44.2 -61.5 48.9 142	-3.7 -13.1 33.2 35.7 35.9	Mean CIELAB difference (5 steps)
B	21	38.9	1.5	-42.4	272	14.2 52.2 -60.3 311	-24.6 50.7 -17.8 53.8 59.2	ΔH* _{CIELAB} = 20.8
R	22	36.4	64.1	29.9	25	35.8 61.1 45.0 36	-0.5 -2.9 15.1 15.4 15.4	ΔE* _{CIELAB} = 25.1


YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out-ref		ΔH* ΔE*	Start output S1				
R	1	46.3	62.7	29.2	25	46.2	60.2	39.2	33	0.0	-2.4	10.0	10.3	10.3	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	50.5	52.8	47.1	42	47.0	58.3	45.9	38	-3.4	5.5	-1.1	5.6	6.6	
	3	59.3	37.6	61.3	58	56.4	41.7	62.8	56	-2.8	4.1	1.5	4.4	5.2	
	4	69.2	20.4	77.4	75	75.9	7.2	90.6	85	6.7	-13.1	13.2	18.6	19.8	
J	5	83.1	-3.4	99.8	92	90.8	-16.8	112.4	99	7.7	-13.3	12.6	18.4	20.0	
	6	77.6	-31.8	90.0	110	76.6	-31.4	88.0	110	-0.9	0.4	-1.9	2.0	2.2	
	7	62.6	-48.6	64.6	127	55.6	-54.4	52.3	136	-6.9	-5.7	-12.2	13.6	15.3	
	8	50.5	-62.0	44.3	145	48.6	-63.3	41.1	147	-1.8	-1.2	-3.1	3.5	3.9	
G	9	46.8	-57.2	18.6	162	47.3	-65.0	38.4	149	0.6	-7.7	19.8	21.3	21.3	
	10	48.4	-42.2	-7.0	190	48.2	-64.4	35.9	151	0.0	-22.1	43.0	48.4	48.4	
C	11	49.4	-32.2	-24.2	217	52.1	-16.3	-52.3	253	2.6	15.9	-28.0	32.3	32.4	Red-Yellow-Green-Blue
	12	50.6	-20.8	-43.7	245	46.0	-7.1	-50.1	262	-4.5	13.7	-6.3	15.1	15.8	
B	13	38.4	1.7	-49.1	272	39.2	1.1	-49.2	271	0.7	-0.5	0.0	0.6	1.0	rgb: R-J-G-B-R
	14	40.5	21.6	-36.9	300	33.5	19.1	-43.3	294	-6.9	-2.4	-6.3	6.8	9.8	
M	15	42.7	41.0	-25.0	329	46.2	71.5	-6.1	355	3.5	30.5	18.9	35.9	36.1	Mean CIELAB difference (17 steps)
	16	46.1	70.7	-3.9	357	46.0	67.5	7.0	6	0.0	-3.1	11.0	11.5	11.5	
R	17	46.3	62.7	29.2	25	46.2	60.8	36.4	31	0.0	-1.8	7.2	7.4	7.4	ΔH* _{CIELAB} = 14.6 ΔE* _{CIELAB} = 15.7
	18	46.3	62.7	29.2	25	46.2	60.2	39.2	33	0.0	-2.4	10.0	10.3	10.3	
J	19	83.1	-3.4	99.8	92	90.8	-16.8	112.4	99	7.7	-13.3	12.6	18.4	20.0	
G	20	46.8	-57.2	18.6	162	47.3	-65.0	38.4	149	0.6	-7.7	19.8	21.3	21.3	
B	21	38.4	1.7	-49.1	272	39.2	1.1	-49.2	271	0.7	-0.5	0.0	0.6	1.0	Mean CIELAB difference (5 steps) ΔH* _{CIELAB} = 10.1 ΔE* _{CIELAB} = 12.0
	22	46.3	62.7	29.2	25	46.2	60.8	36.4	31	0.0	-1.8	7.2	7.4	7.4	

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

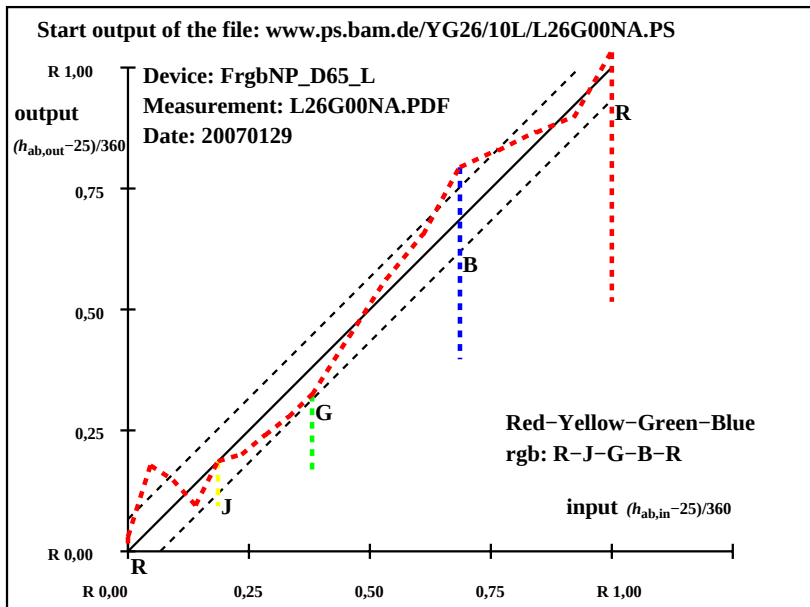

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

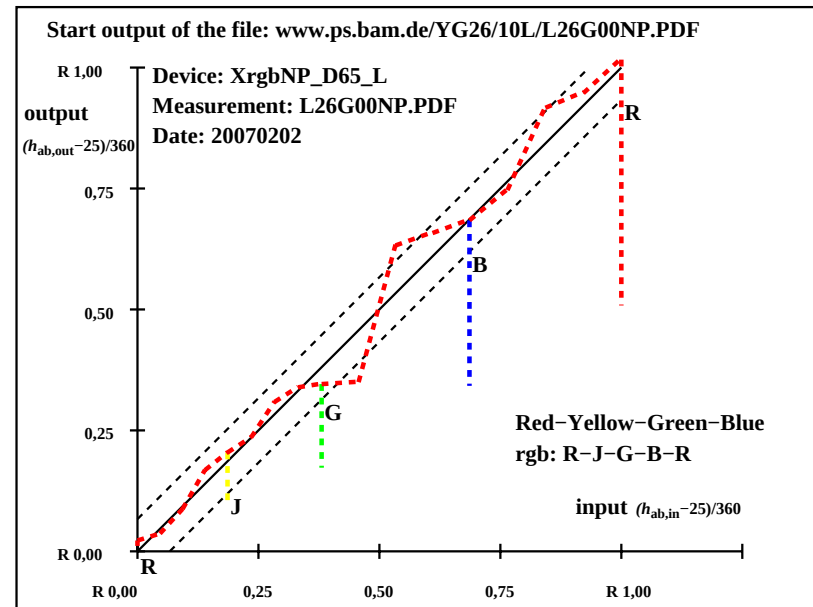

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202