

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	9.1	0.0	0.2	90	9.1	0.0	0.2
	2	14.4	0.0	0.2	90	14.6	0.3	-1.7
	3	19.6	0.0	0.2	90	21.7	-0.4	-2.7
	4	24.8	0.0	0.2	90	28.4	-1.8	-1.9
	5	30.0	0.0	0.2	90	35.5	-2.1	-2.3
	6	35.3	0.0	0.1	90	41.3	-2.6	-0.4
	7	40.5	0.0	0.1	90	46.8	-2.6	-0.7
	8	45.7	0.0	0.1	90	52.9	-3.7	-0.2
Z	9	51.0	0.0	0.1	90	58.3	-3.7	-0.8
	10	56.2	0.0	0.1	90	63.8	-3.2	-1.2
	11	61.4	0.0	0.1	90	69.8	-1.8	-1.5
	12	66.7	0.0	0.1	90	75.6	-0.8	-1.6
	13	71.9	0.0	0.1	90	81.6	0.0	-1.1
	14	77.1	0.0	0.0	90	87.1	0.0	0.0
	15	82.3	0.0	0.0	90	92.1	-0.6	1.1
	16	87.6	0.0	0.0	90	92.9	0.0	0.0
W	17	92.8	0.0	0.0	0	92.8	0.0	0.0
N	18	9.1	0.0	0.2	90	9.1	0.0	0.2
	19	30.0	0.0	0.2	90	35.5	-2.1	-2.3
Z	20	51.0	0.0	0.1	90	58.3	-3.7	-0.8
	21	71.9	0.0	0.1	90	81.6	0.0	-1.1
W	22	92.8	0.0	0.0	0	92.8	0.0	0.0


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.81 - 9.12$
Regularity
 $g^* = 42.5$
Lightness gamut relative to offset
 $f^* = 108.1$
Black - White
000n: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.1$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 1.7$
 $\Delta E^*_{CIELAB} = 4.9$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	22.6	0.2	7.1	88	22.6	0.2	7.1
	2	27.2	0.2	6.7	88	25.1	0.3	7.2
	3	31.7	0.2	6.2	88	28.1	0.3	6.9
	4	36.3	0.2	5.8	88	33.3	0.2	6.3
	5	40.8	0.2	5.4	88	37.9	0.2	5.9
	6	45.4	0.1	4.9	88	43.2	0.1	5.3
	7	49.9	0.1	4.5	88	47.2	0.1	4.8
	8	54.5	0.1	4.1	88	52.6	0.1	4.4
Z	9	59.0	0.1	3.7	88	58.4	0.0	3.9
	10	63.6	0.1	3.2	88	63.4	0.1	3.2
	11	68.1	0.1	2.8	88	68.8	0.0	2.7
	12	72.7	0.1	2.4	88	73.5	0.0	2.5
	13	77.2	0.1	1.9	89	76.9	0.1	1.9
	14	81.8	0.0	1.5	89	81.7	0.0	1.6
	15	86.3	0.0	1.1	89	85.4	0.0	1.0
	16	90.9	0.0	0.6	89	88.9	0.0	0.7
W	17	95.4	0.0	0.2	90	95.4	0.0	0.2
N	18	22.6	0.2	7.1	88	22.6	0.2	7.1
	19	40.8	0.2	5.4	88	37.9	0.2	5.9
Z	20	59.0	0.1	3.7	88	58.4	0.0	3.9
	21	77.2	0.1	1.9	89	76.9	0.1	1.9
W	22	95.4	0.0	0.2	90	95.4	0.0	0.2

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.42 - 22.63$
Regularity
 $g^* = 74.4$
Lightness gamut relative to offset
 $f^* = 94.0$
Black - White
000n: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 1.4$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 0.8$
Mean colour reproduction index: $R^*_{ab,m} = 94$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

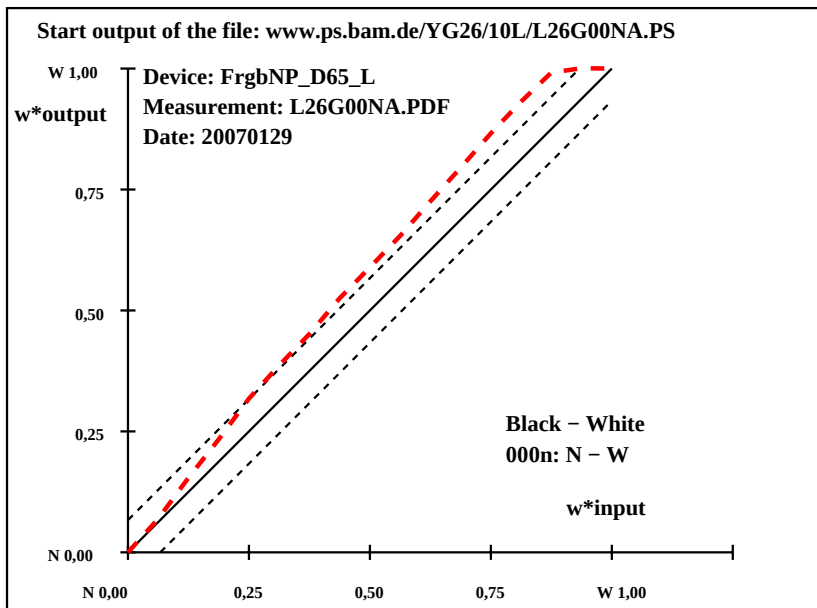

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

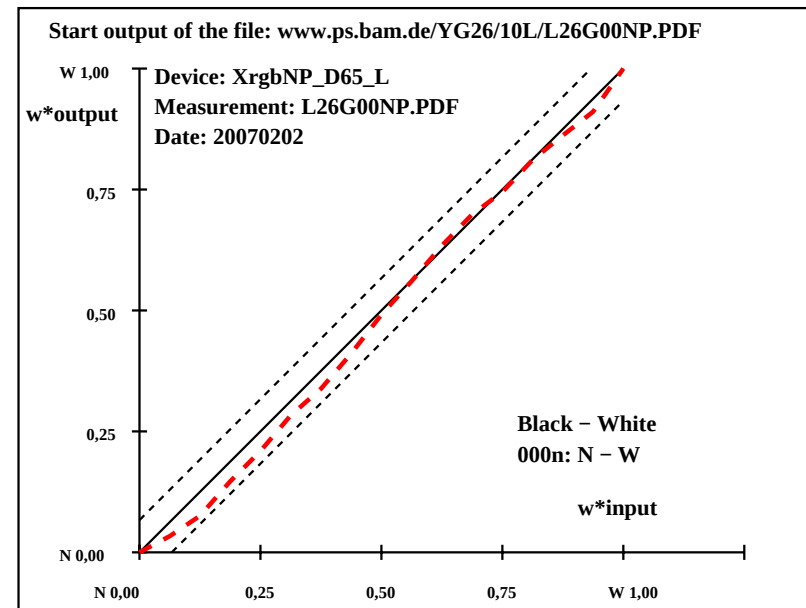

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202