

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.7	0.0	0.0	0.0	0.0	0.0	0.0
	2	13.9	0.0	0.0	0.0	0.0	0.0	0.0
	3	19.1	0.0	0.0	0.0	0.0	0.0	0.0
	4	24.4	0.0	0.0	0.0	0.0	0.0	0.0
	5	29.6	0.0	0.0	0.0	0.0	0.0	0.0
	6	34.9	0.0	0.0	0.0	0.0	0.0	0.0
	7	40.1	0.0	0.0	0.0	0.0	0.0	0.0
	8	45.4	0.0	0.0	0.0	0.0	0.0	0.0
Z	9	50.6	0.0	0.0	0.0	0.0	0.0	0.0
	10	55.9	0.0	0.0	0.0	0.0	0.0	0.0
	11	61.1	0.0	0.0	0.0	0.0	0.0	0.0
	12	66.4	0.0	0.0	0.0	0.0	0.0	0.0
	13	71.6	0.0	0.0	0.0	0.0	0.0	0.0
	14	76.9	0.0	0.0	0.0	0.0	0.0	0.0
	15	82.1	0.0	0.0	0.0	0.0	0.0	0.0
	16	87.4	0.0	0.0	0.0	0.0	0.0	0.0
W	17	92.6	0.0	0.0	0.0	0.0	0.0	0.0
N	18	8.7	0.0	0.0	0.0	0.0	0.0	0.0
	19	29.6	0.0	0.0	0.0	0.0	0.0	0.0
Z	20	50.6	0.0	0.0	0.0	0.0	0.0	0.0
	21	71.6	0.0	0.0	0.0	0.0	0.0	0.0
W	22	92.6	0.0	0.0	0.0	0.0	0.0	0.0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.63 - 8.65$
Regularity
 $g^* = 44.4$
Lightness gamut relative to offset
 $f^* = 108.5$
Black - White
w: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.5$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.0$
 $\Delta E^*_{CIELAB} = 4.8$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	21.3	0.0	-0.1	243	21.3	0.0	0.0
	2	25.9	0.0	-0.1	242	24.0	0.0	0.0
	3	30.6	0.0	-0.1	240	26.6	0.0	0.0
	4	35.2	0.0	-0.1	238	32.1	0.0	0.0
	5	39.8	0.0	-0.1	236	36.8	0.0	0.0
	6	44.5	0.0	0.0	234	42.6	0.0	0.0
	7	49.1	0.0	0.0	231	47.2	0.0	0.0
	8	53.8	0.0	0.0	228	51.9	0.0	0.0
Z	9	58.4	0.0	0.0	225	56.8	0.0	0.0
	10	63.0	0.0	0.0	221	63.2	0.0	0.0
	11	67.7	0.0	0.0	217	67.4	0.0	0.0
	12	72.3	0.0	0.0	212	71.7	0.0	0.0
	13	77.0	0.0	0.0	207	75.9	0.0	0.0
	14	81.6	0.0	0.0	201	81.1	0.0	0.0
	15	86.2	0.0	0.0	194	85.1	0.0	0.0
	16	90.9	0.0	0.0	187	89.1	0.0	0.0
W	17	95.5	0.0	0.0	180	95.5	0.0	0.0
N	18	21.3	0.0	-0.1	243	21.3	0.0	0.0
	19	39.8	0.0	-0.1	236	36.8	0.0	0.0
Z	20	58.4	0.0	0.0	225	56.8	0.0	0.0
	21	77.0	0.0	0.0	207	75.9	0.0	0.0
W	22	95.5	0.0	0.0	180	95.5	0.0	0.0

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.51 - 21.27$
Regularity
 $g^* = 77.3$
Lightness gamut relative to offset
 $f^* = 95.9$
Black - White
w: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 1.5$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.2$
 $\Delta E^*_{CIELAB} = 1.1$
Mean colour reproduction index: $R^*_{ab,m} = 94$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

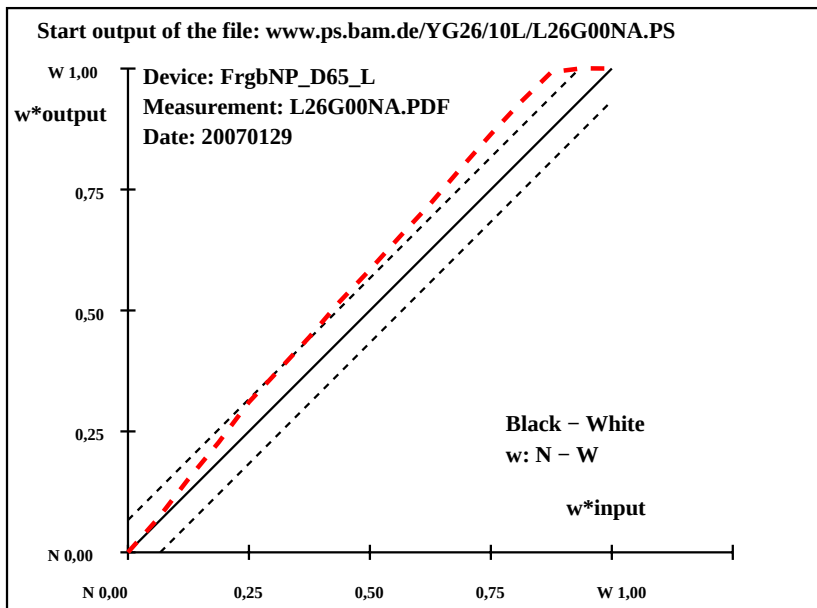

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

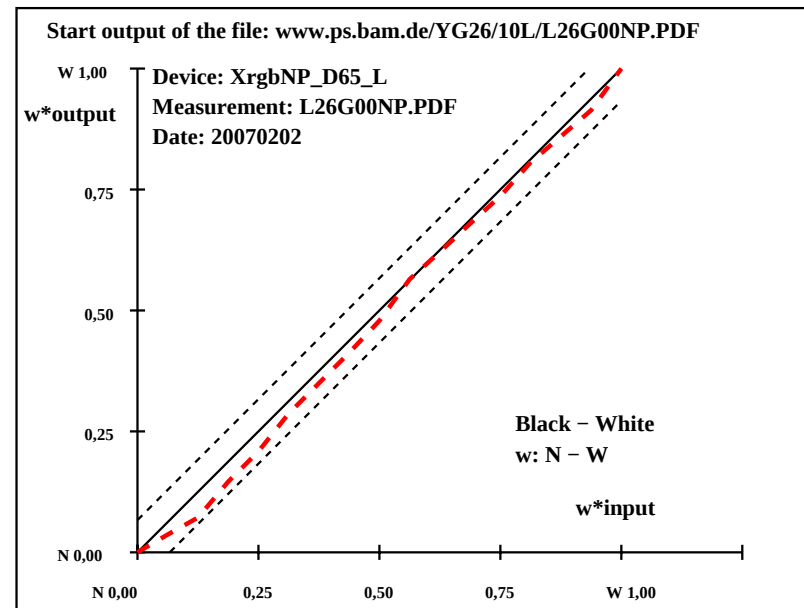

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202