

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	8.7	0.0	0.0	0	8.7	0.0	0.0
	2	13.9	0.0	0.0	0	13.9	0.7	-2.5
	3	19.1	0.0	0.0	0	20.8	-0.2	-3.9
	4	24.4	0.0	0.0	0	27.4	-1.8	-3.0
	5	29.6	0.0	0.0	0	34.4	-2.2	-3.4
	6	34.9	0.0	0.0	0	40.2	-2.7	-1.7
	7	40.1	0.0	0.0	0	45.9	-3.1	-1.5
	8	45.4	0.0	0.0	0	52.0	-3.9	-1.1
Z	9	50.6	0.0	0.0	0	57.5	-3.9	-1.5
	10	55.9	0.0	0.0	0	63.4	-3.1	-1.9
	11	61.1	0.0	0.0	0	69.1	-1.8	-2.1
	12	66.4	0.0	0.0	0	75.2	-0.6	-2.1
	13	71.6	0.0	0.0	0	81.2	0.1	-1.4
	14	76.9	0.0	0.0	0	86.9	0.0	-0.1
	15	82.1	0.0	0.0	0	92.0	-0.7	1.1
	16	87.4	0.0	0.0	0	92.7	0.0	0.0
W	17	92.6	0.0	0.0	0	92.6	0.0	0.0
N	18	8.7	0.0	0.0	0	8.7	0.0	0.0
	19	29.6	0.0	0.0	0	34.4	-2.2	-3.4
Z	20	50.6	0.0	0.0	0	57.5	-3.9	-1.5
	21	71.6	0.0	0.0	0	81.2	0.1	-1.4
W	22	92.6	0.0	0.0	0	92.6	0.0	0.0


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.63 - 8.65$
Regularity
 $g^* = 44.4$
Lightness gamut relative to offset
 $f^* = 108.5$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 2.5$
 $\Delta E^*_{CIELAB} = 6.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.0$
 $\Delta E^*_{CIELAB} = 4.8$
Mean colour reproduction index: $R^*_{ab,m} = 72$

YE300-3N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	21.7	0.0	0.0	0	21.7	0.0	0.0
	2	26.3	0.0	0.0	0	22.6	0.0	0.0
	3	30.9	0.0	0.0	0	24.8	0.0	0.1
	4	35.5	0.0	0.0	0	29.1	0.0	0.0
	5	40.1	0.0	0.0	0	34.7	0.0	0.0
	6	44.7	0.0	0.0	0	40.8	0.0	0.0
	7	49.3	0.0	0.0	0	45.6	0.0	0.2
	8	53.9	0.0	0.0	0	52.5	0.0	0.1
Z	9	58.6	0.0	0.0	0	58.7	0.0	0.2
	10	63.2	0.0	0.0	0	64.5	0.0	0.2
	11	67.8	0.0	0.0	0	69.4	0.0	0.2
	12	72.4	0.0	0.0	0	74.3	0.0	0.2
	13	77.0	0.0	0.0	0	79.1	0.0	0.1
	14	81.6	0.0	0.0	0	83.0	0.0	0.0
	15	86.2	0.0	0.0	0	86.4	0.0	0.1
	16	90.8	0.0	0.0	0	89.7	0.0	0.2
W	17	95.5	0.0	0.0	0	95.5	0.0	0.0
N	18	21.7	0.0	0.0	0	21.7	0.0	0.0
	19	40.1	0.0	0.0	0	34.7	0.0	0.0
Z	20	58.6	0.0	0.0	0	58.7	0.0	0.2
	21	77.0	0.0	0.0	0	79.1	0.0	0.1
W	22	95.5	0.0	0.0	0	95.5	0.0	0.0

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.46 - 21.66$
Regularity
 $g^* = 54.2$
Lightness gamut relative to offset
 $f^* = 95.3$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 2.4$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 1.6$
Mean colour reproduction index: $R^*_{ab,m} = 90$

YE301-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

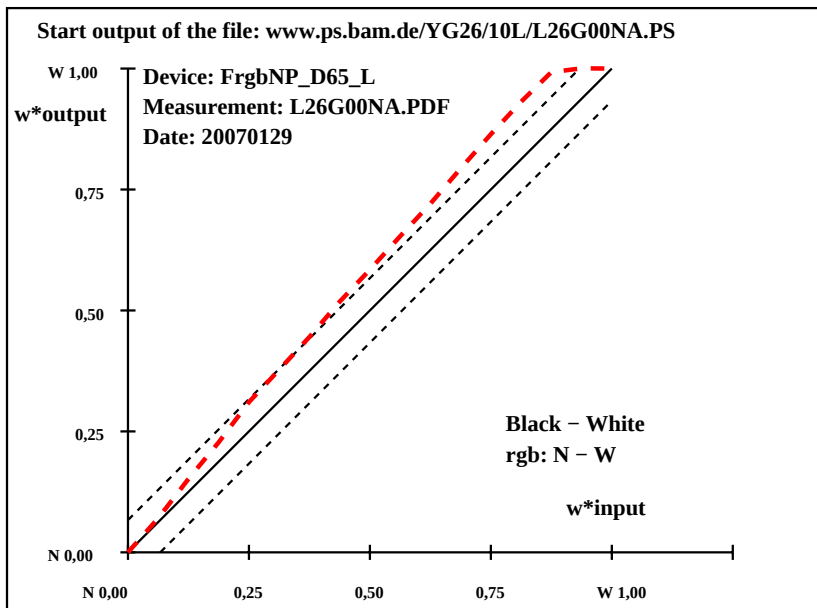

YE300-7N, ; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

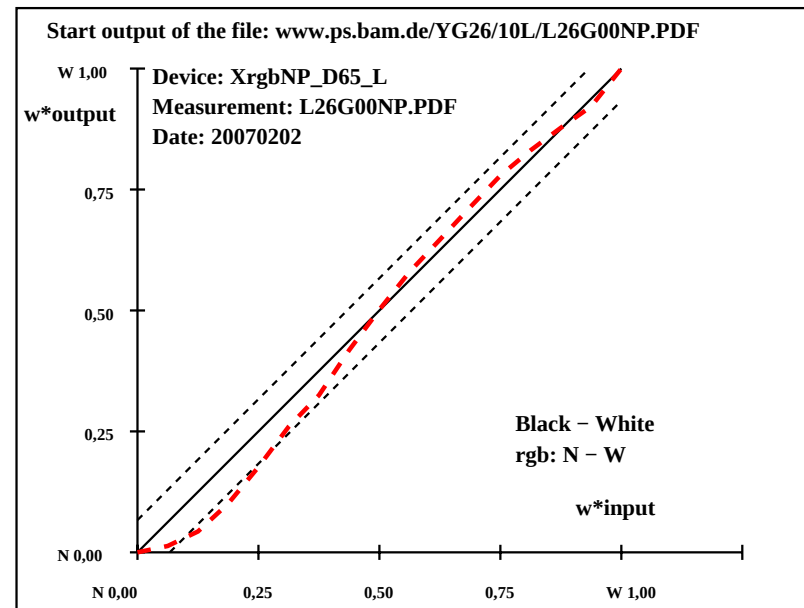

YE301-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202