

T	LAB*a _{ref}	lab*y _{ref}	LAB*a _{out}	lab*y _{out}	LAB*a _{out} -ref ΔE*	LAB*y _{out} -ref ΔE*
0	1 35.9	60.7	44.5	36	0.0	0.0
2	39.5	56.9	41.7	36	0.7	1.1
3	43.0	53.1	39.0	36	2.1	0.4
4	46.6	49.3	36.2	36	3.3	-1.0
5	50.1	45.5	33.4	36	5.4	-2.2
6	53.7	41.7	30.6	36	7.7	-3.1
7	57.2	37.9	27.9	36	10.0	-4.3
8	60.8	34.1	25.1	36	12.2	-5.1
9	64.3	30.3	22.3	36	14.6	-5.9
10	67.9	26.5	19.5	36	17.0	-6.7
11	71.4	22.7	16.8	36	19.5	-7.5
12	75.0	18.9	14.0	36	22.0	-8.3
13	78.5	15.1	11.2	37	24.5	-9.1
14	82.1	11.3	8.4	37	27.0	-9.9
15	85.6	7.5	5.6	37	29.5	-10.7
16	89.2	3.7	2.9	38	32.0	-11.5
17	92.7	0.0	0.1	135	34.5	-12.3
18	35.9	60.7	44.5	36	0.0	0.0
19	50.1	45.5	33.4	36	5.4	-2.2
20	64.3	30.3	22.3	36	12.2	-5.1
21	78.5	15.1	11.2	37	24.5	-9.1
22	92.7	0.0	0.1	135	34.5	-12.3

Start output S1

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

relative CIELAB data used for "out"

ΔE* = 92.71 - 35.94

Regularity

g* = 41.7

Lightness gamut relative to offset

f* = 73.3

Orange red - White

rgb: O - W

Mean CIELAB difference (17 steps)

ΔH*_{CIELAB} = 8.6

ΔE*_{CIELAB} = 9.6

Mean CIELAB difference (5 steps)

ΔH*_{CIELAB} = 6.6

ΔE*_{CIELAB} = 7.4

Mean colour reproduction index:

R*_{abm} = 58

YE300-3N; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

T	LAB*a _{ref}	lab*y _{ref}	LAB*a _{out}	lab*y _{out}	LAB*a _{out} -ref ΔE*	LAB*y _{out} -ref ΔE*
0	1 46.3	60.0	40.4	34	0.0	0.0
2	49.4	56.3	37.9	34	-3.0	4.0
3	52.4	52.5	35.4	34	-6.2	8.1
4	55.5	48.8	32.8	34	-12.7	11.3
5	58.6	45.0	30.3	34	-18.8	14.3
6	61.7	41.3	27.8	34	-24.9	17.3
7	64.7	37.5	25.3	34	-31.0	20.3
8	67.8	33.8	22.7	34	-37.1	23.3
9	70.9	30.0	20.2	34	-43.2	26.3
10	73.9	26.3	17.7	34	-49.3	29.3
11	77.0	22.5	15.2	34	-55.4	32.3
12	80.1	18.8	12.6	34	-61.5	35.3
13	83.1	15.0	10.1	34	-67.6	38.3
14	86.2	11.3	7.6	34	-73.7	41.3
15	89.3	7.5	5.0	34	-79.8	44.3
16	92.3	3.8	2.5	34	-85.9	47.3
17	95.4	0.0	0.0	0	-92.0	50.3
18	46.3	60.0	40.4	34	0.0	0.0
19	58.6	45.0	30.3	34	-18.8	14.3
20	70.9	30.0	20.2	34	-43.2	26.3
21	83.1	15.0	10.1	34	-67.6	38.3
22	95.4	0.0	0.0	0	-92.0	50.3

Start output S1

Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

relative CIELAB data used for "out"

ΔE* = 95.41 - 46.31

Regularity

g* = 11.8

Lightness gamut relative to offset

f* = 63.4

Orange red - White

rgb: O - W

Mean CIELAB difference (17 steps)

ΔH*_{CIELAB} = 6.6

ΔE*_{CIELAB} = 8.9

Mean CIELAB difference (5 steps)


ΔH*_{CIELAB} = 5.3

ΔE*_{CIELAB} = 7.1


Mean colour reproduction index:

R*_{abm} = 61

YE301-3N; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

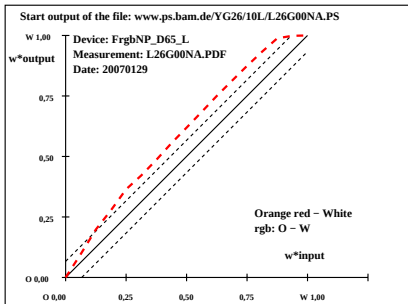

YE300-7N; Device: FrgbNP_D65_L; Measurement: L26G00NA.PDF; Date: 20070129

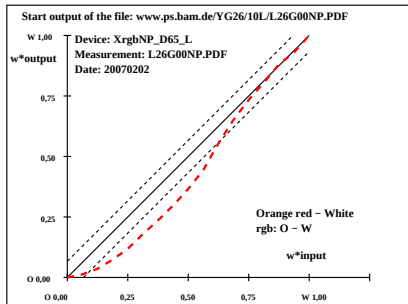

YE301-7N; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202