

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
C	1	51.2	-15.7	-52.5	253	51.2	-15.7	-52.5	253
	2	53.9	-14.7	-49.2	253	51.0	-15.5	-52.8	254
	3	56.7	-13.7	-45.9	253	50.8	-15.2	-52.8	254
	4	59.5	-12.7	-42.7	253	51.1	-15.3	-52.7	254
	5	62.2	-11.8	-39.4	253	51.7	-15.6	-52.4	253
	6	65.0	-10.8	-36.1	253	52.7	-16.2	-51.3	252
	7	67.7	-9.8	-32.8	253	55.1	-16.2	-48.9	252
	8	70.5	-8.8	-29.5	253	57.0	-16.3	-45.4	250
	9	73.3	-7.8	-26.3	253	58.6	-15.8	-40.9	249
	10	76.0	-6.8	-23.0	253	60.9	-15.4	-36.7	247
	11	78.8	-5.8	-19.7	253	64.9	-13.8	-30.9	246
	12	81.6	-4.8	-16.4	253	68.6	-12.1	-26.3	245
	13	84.3	-3.9	-13.1	253	74.3	-10.3	-21.2	244
	14	87.1	-2.9	-9.8	253	81.0	-8.3	-15.4	242
	15	89.9	-1.9	-6.6	253	87.0	-5.8	-9.9	239
	16	92.6	-0.9	-3.3	254	91.1	-3.2	-5.5	239
W	17	95.4	0.0	0.0	270	95.4	0.0	0.0	270
C	18	51.2	-15.7	-52.5	253	51.2	-15.7	-52.5	253
	19	62.2	-11.8	-39.4	253	51.7	-15.6	-52.4	253
	20	73.3	-7.8	-26.3	253	58.6	-15.8	-40.9	249
	21	84.3	-3.9	-13.1	253	74.3	-10.3	-21.2	244
W	22	95.4	0.0	0.0	270	95.4	0.0	0.0	270


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.39 - 51.16$
Regularity
 $g^* = 2.5$
Lightness gamut relative to offset
 $f^* = 57.1$
Cyan blue – White
rgb: C – W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 10.1$
 $\Delta E^*_{CIELAB} = 13.2$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 8.1$
 $\Delta E^*_{CIELAB} = 10.8$
Mean colour reproduction index: $R^*_{ab,m} = 42$

YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
C	1	55.7	-19.4	-41.4	245	55.7	-19.4	-41.4	245
	2	58.1	-18.2	-38.8	245	56.7	-20.0	-39.0	243
	3	60.6	-17.0	-36.2	245	58.1	-20.2	-36.8	241
	4	63.1	-15.7	-33.6	245	60.0	-20.9	-33.6	238
	5	65.6	-14.5	-31.0	245	61.4	-19.7	-31.8	238
	6	68.1	-13.3	-28.4	245	63.3	-18.1	-29.4	238
	7	70.6	-12.1	-25.8	245	65.9	-16.4	-26.1	238
	8	73.1	-10.9	-23.2	245	69.6	-15.7	-22.8	235
	9	75.5	-9.7	-20.7	245	72.6	-13.9	-19.1	234
	10	78.0	-8.4	-18.1	245	77.3	-12.6	-15.3	230
	11	80.5	-7.2	-15.5	245	80.2	-10.5	-13.6	232
	12	83.0	-6.0	-12.9	245	81.9	-9.0	-11.9	233
	13	85.5	-4.8	-10.3	245	83.9	-7.1	-10.3	235
	14	88.0	-3.6	-7.7	245	85.9	-5.4	-8.1	236
	15	90.4	-2.3	-5.1	245	88.7	-3.7	-6.0	238
	16	92.9	-1.1	-2.5	245	90.8	-2.2	-3.4	237
W	17	95.4	0.0	0.0	0	95.4	0.0	0.0	0
C	18	55.7	-19.4	-41.4	245	55.7	-19.4	-41.4	245
	19	65.6	-14.5	-31.0	245	61.4	-19.7	-31.8	238
	20	75.5	-9.7	-20.7	245	72.6	-13.9	-19.1	234
	21	85.5	-4.8	-10.3	245	83.9	-7.1	-10.3	235
W	22	95.4	0.0	0.0	0	95.4	0.0	0.0	0

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.41 - 55.66$
Regularity
 $g^* = 49.5$
Lightness gamut relative to offset
 $f^* = 51.4$
Cyan blue – White
cmy0: C – W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 3.1$
 $\Delta E^*_{CIELAB} = 3.9$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.4$
 $\Delta E^*_{CIELAB} = 3.0$
Mean colour reproduction index: $R^*_{ab,m} = 83$

YE311-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

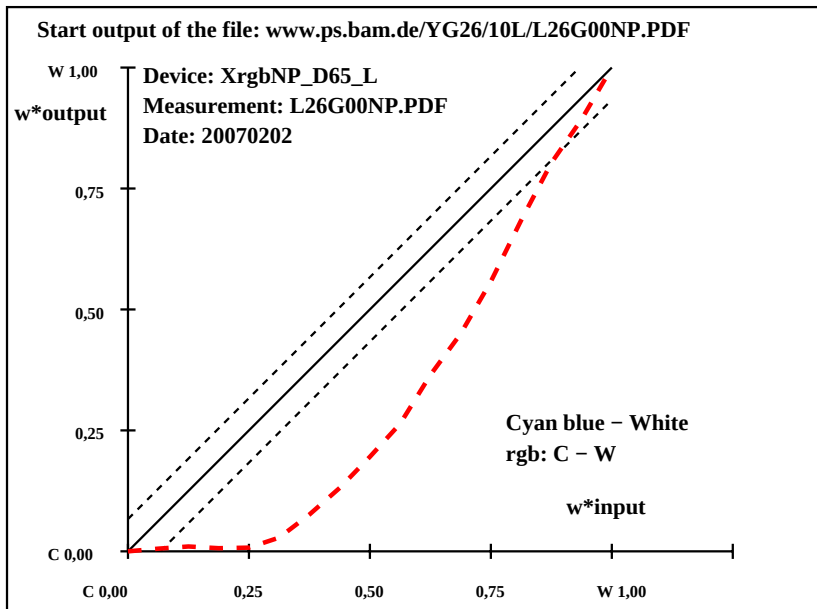

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

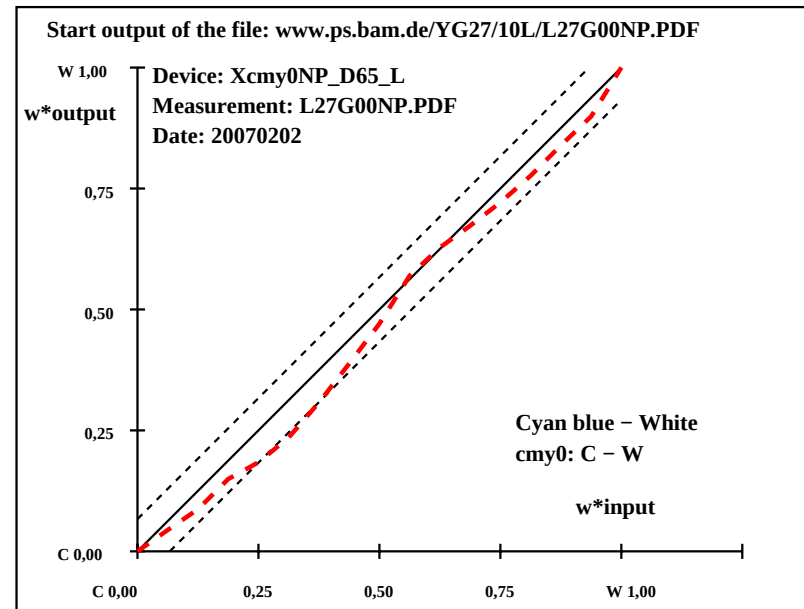

YE311-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202