

T	i	LAB*a _{ref}	hab _{ref}	LAB*a _{out}	hab _{out}	LAB*a _{out} /c-ref	ΔH*	ΔE*
N	1	21.7	0.0	0.0	0.0	0.0	0.0	0.0
	2	26.3	0.0	0.0	0.0	-3.5	0.0	3.6
	3	30.9	0.0	0.0	0.1	-5.9	0.1	6.0
	4	35.5	0.0	0.0	0.0	-6.3	0.0	6.4
	5	40.1	0.0	0.0	0.0	-5.3	0.0	5.4
	6	44.7	0.0	0.0	0.0	-3.8	0.0	3.9
	7	49.3	0.0	0.0	0.2	-3.6	0.2	3.7
	8	53.9	0.0	0.0	0.1	-1.3	0.1	1.4
Z	9	58.6	0.0	0.0	0.2	0.1	0.2	0.2
	10	63.2	0.0	0.0	0.2	1.3	0.2	1.3
	11	67.8	0.0	0.0	0.2	1.6	0.2	1.6
	12	72.4	0.0	0.0	0.2	1.9	0.2	1.9
	13	77.0	0.0	0.0	0.1	2.1	0.1	2.1
	14	81.6	0.0	0.0	0.0	1.4	0.0	1.4
	15	86.2	0.0	0.0	0.1	0.2	0.1	0.2
	16	90.8	0.0	0.0	0.2	-1.1	0.2	1.2
W	17	95.5	0.0	0.0	0.0	0.0	0.0	0.0
N	18	21.7	0.0	0.0	0.0	0.0	0.0	0.0
	19	40.1	0.0	0.0	0.0	-5.3	0.0	5.4
Z	20	58.6	0.0	0.0	0.2	0.1	0.2	0.2
	21	77.0	0.0	0.0	0.1	2.1	0.1	2.1
W	22	95.5	0.0	0.0	0.0	0.0	0.0	0.0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.46 - 21.66$
Regularity
 $g^* = 54.2$
Lightness gamut relative to offset
 $f^* = 95.3$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 2.4$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 1.6$
Mean colour reproduction index: $R^*_{ab,m} = 90$

YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202


T	i	LAB*a _{ref}	hab _{ref}	LAB*a _{out}	hab _{out}	LAB*a _{out} /c-ref	ΔH*	ΔE*
N	1	26.9	0.0	0.0	0.0	0.0	0.0	0.0
	2	31.2	0.0	0.0	0.0	-0.6	1.1	2.4
	3	35.5	0.0	0.0	0.0	-1.5	1.0	4.5
	4	39.8	0.0	0.0	0.0	-1.7	0.5	6.0
	5	44.1	0.0	0.0	0.0	-1.9	2.0	8.3
	6	48.3	0.0	0.0	0.0	-1.7	2.1	9.9
	7	52.6	0.0	0.0	0.0	-1.3	3.0	10.6
	8	56.9	0.0	0.0	0.0	-2.5	4.6	11.0
Z	9	61.2	0.0	0.0	0.0	-1.7	6.1	11.3
	10	65.5	0.0	0.0	0.0	-1.3	7.2	11.4
	11	69.7	0.0	0.0	0.0	-0.7	7.2	11.1
	12	74.0	0.0	0.0	0.0	-0.8	6.5	10.9
	13	78.3	0.0	0.0	0.0	-0.3	6.3	10.4
	14	82.6	0.0	0.0	0.0	-0.1	5.9	9.4
	15	86.9	0.0	0.0	0.0	-1.2	5.2	8.1
	16	91.1	0.0	0.0	0.0	0.3	1.9	6.3
W	17	95.4	0.0	0.0	0.0	0.0	0.0	0.0
N	18	26.9	0.0	0.0	0.0	0.0	0.0	0.0
	19	44.1	0.0	0.0	0.0	-1.9	2.0	8.3
Z	20	61.2	0.0	0.0	0.0	-1.7	6.1	11.3
	21	78.3	0.0	0.0	0.0	-0.3	6.3	10.4
W	22	95.4	0.0	0.0	0.0	0.0	0.0	0.0

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.41 - 26.94$
Regularity
 $g^* = 36.6$
Lightness gamut relative to offset
 $f^* = 88.5$
Black - White
cmy0: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 3.9$
 $\Delta E^*_{CIELAB} = 7.7$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 3.1$
 $\Delta E^*_{CIELAB} = 6.0$
Mean colour reproduction index: $R^*_{ab,m} = 66$

YE311-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

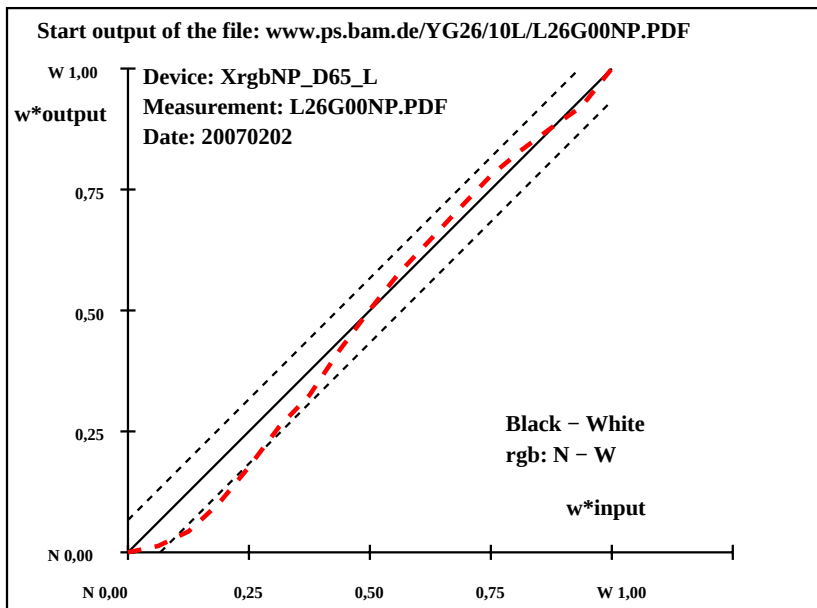

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

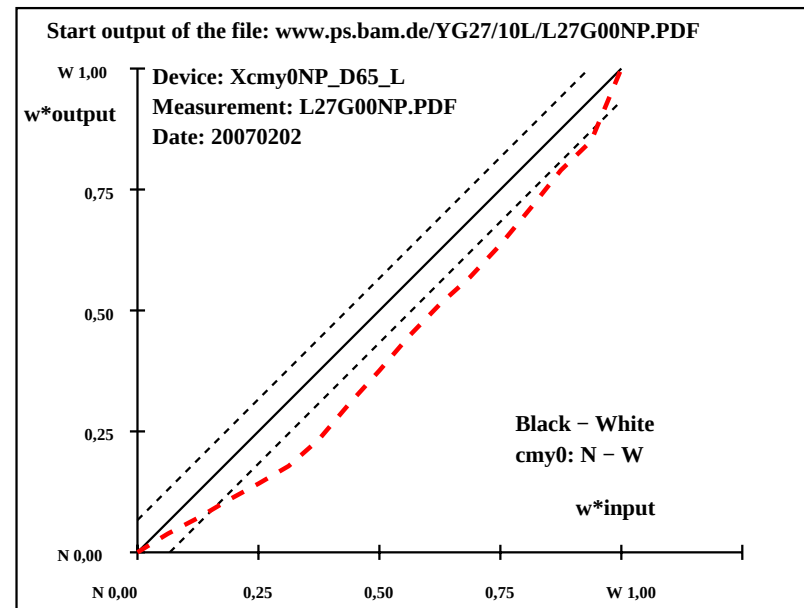

YE311-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202