

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
O	1	46.3	60.2	39.9	34	46.3	60.2	39.9	34
	2	47.8	52.7	34.9	34	45.8	58.4	36.2	32
	3	49.3	45.2	30.0	34	44.3	55.0	31.1	29
	4	50.8	37.6	25.0	34	43.6	50.4	23.8	25
	5	52.3	30.1	20.0	34	44.6	43.7	18.6	23
	6	53.8	22.6	15.0	34	46.1	32.9	13.8	23
	7	55.3	15.1	10.0	34	49.6	19.9	9.5	26
	8	56.8	7.5	5.1	34	55.4	7.8	2.8	20
Z	9	58.4	0.0	0.1	90	58.4	0.0	0.1	90
	10	57.3	-1.7	-6.5	255	57.3	-8.2	-8.0	224
	11	56.2	-3.4	-13.2	255	50.7	-15.3	-17.9	229
	12	55.1	-5.2	-19.9	255	47.3	-19.9	-26.5	233
	13	54.0	-7.0	-26.6	255	46.5	-22.0	-35.0	238
	14	52.9	-8.7	-33.3	255	48.0	-23.4	-40.1	240
	15	51.8	-10.5	-40.0	255	47.4	-20.5	-43.4	245
	16	50.7	-12.2	-46.7	255	47.9	-20.1	-45.0	246
C	17	49.6	-14.0	-53.4	255	49.6	-14.0	-53.4	255
O	18	46.3	60.2	39.9	34	46.3	60.2	39.9	34
	19	52.3	30.1	20.0	34	44.6	43.7	18.6	23
Z	20	58.4	0.0	0.1	90	58.4	0.0	0.1	90
	21	54.0	-7.0	-26.6	255	46.5	-22.0	-35.0	238
C	22	49.6	-14.0	-53.4	255	49.6	-14.0	-53.4	255

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Regularity
 $g^* = 12.5$

Orange red – Cyan blue
rgb: O – Z – C

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 8.7$
 $\Delta E^*_{CIELAB} = 9.7$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.2$
 $\Delta E^*_{CIELAB} = 6.9$

YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
O	1	48.3	58.2	45.6	38	48.3	58.2	45.6	38
	2	48.9	50.7	40.7	39	48.7	51.8	40.6	38
	3	49.5	43.2	35.9	40	49.3	47.3	35.8	37
	4	50.2	35.7	31.0	41	50.4	41.2	30.6	37
	5	50.8	28.2	26.2	43	51.3	33.0	26.5	39
	6	51.5	20.7	21.3	46	51.5	24.3	21.1	41
	7	52.1	13.2	16.4	51	52.4	14.4	17.2	50
	8	52.7	5.7	11.6	64	53.3	5.4	11.7	65
Z	9	53.4	-1.7	6.7	105	53.4	-1.7	6.7	105
	10	53.6	-4.0	0.8	169	53.5	-8.1	0.8	174
	11	53.9	-6.3	-5.0	218	53.5	-13.0	-3.3	195
	12	54.1	-8.6	-10.9	232	53.8	-16.8	-9.0	208
	13	54.4	-11.0	-16.8	237	52.9	-20.0	-14.8	217
	14	54.6	-13.3	-22.7	240	53.9	-21.8	-20.3	223
	15	54.9	-15.6	-28.6	241	53.9	-21.3	-26.5	231
	16	55.1	-17.9	-34.5	243	54.5	-21.3	-33.2	237
C	17	55.4	-20.2	-40.4	243	55.4	-20.2	-40.4	243
O	18	48.3	58.2	45.6	38	48.3	58.2	45.6	38
	19	50.8	28.2	26.2	43	51.3	33.0	26.5	39
Z	20	53.4	-1.7	6.7	105	53.4	-1.7	6.7	105
	21	54.4	-11.0	-16.8	237	52.9	-20.0	-14.8	217
C	22	55.4	-20.2	-40.4	243	55.4	-20.2	-40.4	243

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Regularity
 $g^* = 17.2$

Orange red – Cyan blue
cmy0: O – Z – C


Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 4.0$
 $\Delta E^*_{CIELAB} = 4.1$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.8$
 $\Delta E^*_{CIELAB} = 2.8$

YE311-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

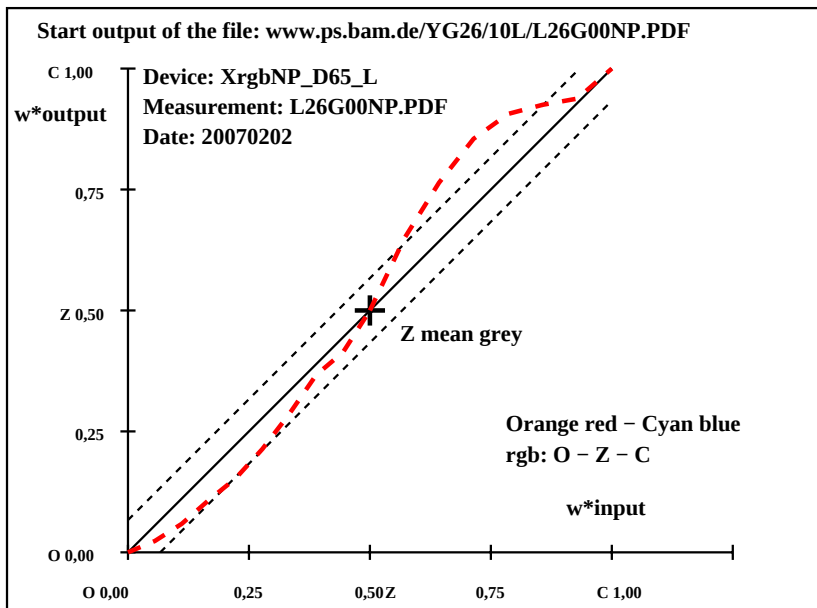

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

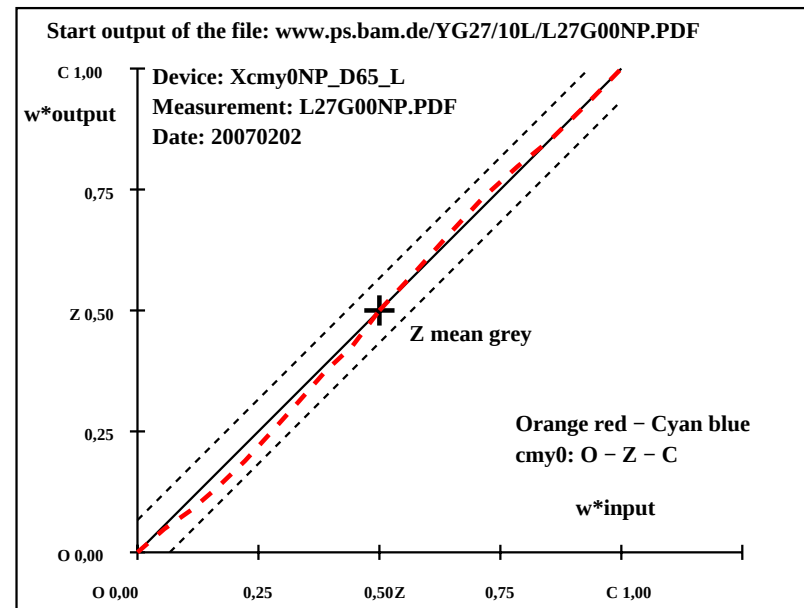

YE311-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202