

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	90.8	-16.9	112.2	99	90.8	-16.9	112.2	99
	2	86.7	-14.8	98.2	99	84.3	-15.2	101.7	99
	3	82.5	-12.7	84.1	99	81.2	-15.2	94.4	99
	4	78.3	-10.5	70.1	99	78.4	-14.6	84.6	100
	5	74.2	-8.4	56.1	99	75.0	-13.7	70.5	101
	6	70.0	-6.3	42.1	99	72.2	-11.7	52.0	103
	7	65.9	-4.2	28.1	99	68.1	-9.2	34.7	105
	8	61.7	-2.0	14.0	99	65.1	-5.6	18.7	107
Z	9	57.6	0.0	0.0	0	57.6	0.0	0.0	0
	10	55.1	0.2	-6.1	272	53.9	-0.1	-13.2	269
	11	52.7	0.4	-12.3	272	49.2	-1.6	-23.5	266
	12	50.3	0.6	-18.5	272	42.6	-0.2	-33.5	269
	13	47.9	0.8	-24.7	272	36.8	2.9	-41.4	274
	14	45.5	1.0	-30.9	272	34.5	5.3	-45.8	277
	15	43.1	1.2	-37.1	272	35.2	5.7	-48.2	277
	16	40.6	1.4	-43.3	272	36.5	4.2	-48.7	275
V	17	38.2	1.6	-49.5	272	38.2	1.6	-49.5	272
Y	18	90.8	-16.9	112.2	99	90.8	-16.9	112.2	99
	19	74.2	-8.4	56.1	99	75.0	-13.7	70.5	101
Z	20	57.6	0.0	0.0	0	57.6	0.0	0.0	0
	21	47.9	0.8	-24.7	272	36.8	2.9	-41.4	274
V	22	38.2	1.6	-49.5	272	38.2	1.6	-49.5	272

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G

Regularity
 $g^* = 6.9$

Yellow - Violet blue
rgb: Y - Z - V

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 9.1$
 $\Delta E^*_{CIELAB} = 10.0$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 6.4$
 $\Delta E^*_{CIELAB} = 7.1$

YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	90.9	-17.3	110.7	99	90.9	-17.3	110.7	99
	2	86.3	-15.2	97.7	99	83.1	-15.0	92.3	99
	3	81.6	-13.1	84.7	99	79.6	-14.6	82.6	100
	4	77.0	-11.0	71.7	99	75.2	-12.1	66.7	100
	5	72.3	-8.9	58.8	99	70.5	-9.4	50.7	101
	6	67.6	-6.7	45.8	98	65.8	-6.8	36.1	101
	7	63.0	-4.6	32.8	98	61.8	-4.2	25.2	100
	8	58.3	-2.5	19.8	98	57.8	-2.1	14.7	99
Z	9	53.7	-0.4	6.8	94	53.7	-0.4	6.8	94
	10	50.3	1.9	1.5	38	49.1	1.8	-0.8	333
	11	46.9	4.4	-3.7	319	45.3	6.0	-9.4	302
	12	43.5	6.8	-9.0	307	41.0	8.4	-17.8	295
	13	40.1	9.3	-14.3	303	37.2	11.5	-22.9	297
	14	36.8	11.7	-19.5	301	33.8	13.1	-27.4	295
	15	33.4	14.1	-24.8	300	31.7	15.3	-30.2	297
	16	30.0	16.6	-30.1	299	28.7	17.4	-32.9	298
V	17	26.6	19.0	-35.4	298	26.6	19.0	-35.4	298
Y	18	90.9	-17.3	110.7	99	90.9	-17.3	110.7	99
	19	72.3	-8.9	58.8	99	70.5	-9.4	50.7	101
Z	20	53.7	-0.4	6.8	94	53.7	-0.4	6.8	94
	21	40.1	9.3	-14.3	303	37.2	11.5	-22.9	297
V	22	26.6	19.0	-35.4	298	26.6	19.0	-35.4	298

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G


Regularity
 $g^* = 51.7$

Yellow - Violet blue
cmY0: Y - Z - V


Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 5.1$
 $\Delta E^*_{CIELAB} = 5.4$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 3.4$
 $\Delta E^*_{CIELAB} = 3.5$

YE311-3N, ; Device: XcmY0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

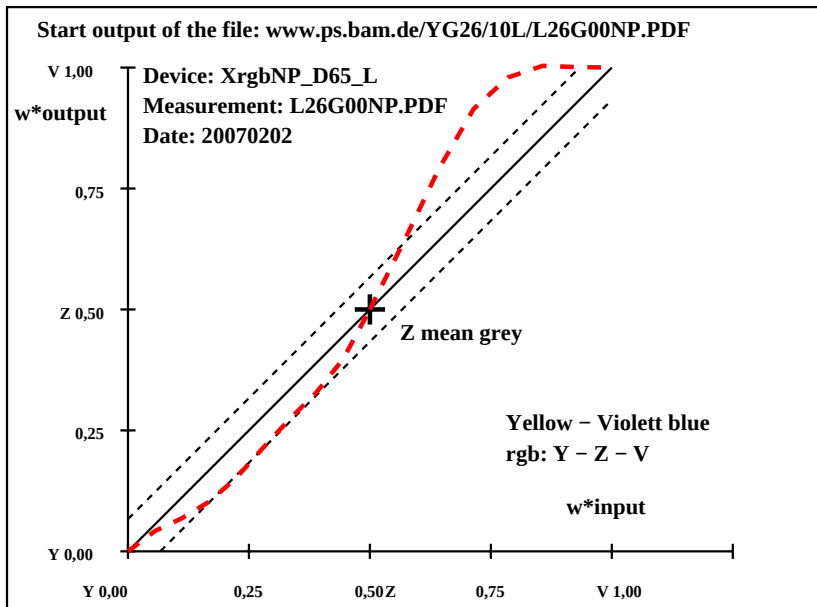

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

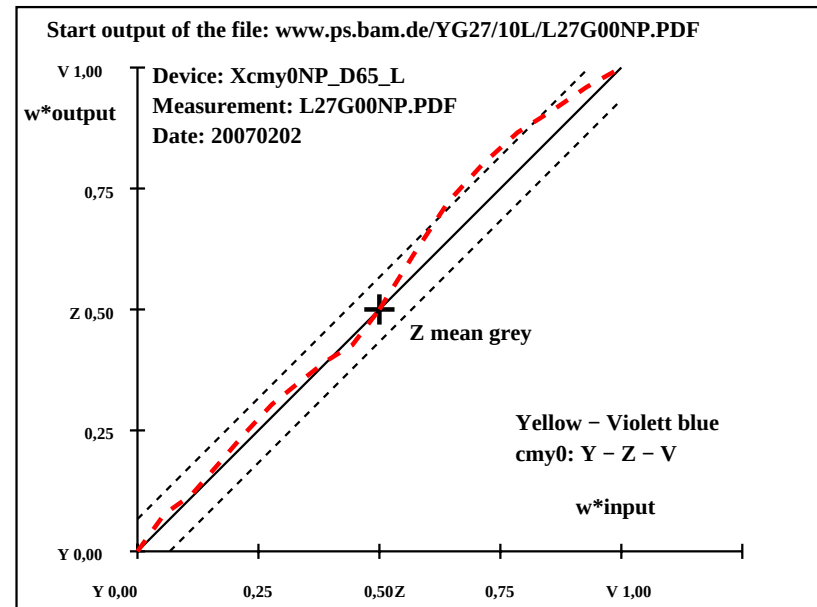

YE311-7N, ; Device: XcmY0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202