

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
L	1	47.5	-66.6	39.0	150	47.5	-66.6	39.0	150
	2	48.8	-58.3	34.1	150	47.8	-65.5	38.7	149
	3	50.1	-49.9	29.3	150	47.5	-66.1	38.0	150
	4	51.4	-41.6	24.4	150	48.0	-65.8	38.5	150
	5	52.7	-33.3	19.6	150	48.9	-58.8	35.8	149
	6	54.0	-24.9	14.7	150	50.7	-47.1	27.3	150
	7	55.3	-16.6	9.8	149	53.9	-31.5	18.3	150
	8	56.6	-8.2	5.0	149	58.0	-15.1	13.8	138
Z	9	57.9	0.0	0.1	90	57.9	0.0	0.1	90
	10	56.4	8.9	-0.5	356	51.9	9.7	-10.6	312
	11	54.9	17.9	-1.3	356	45.7	24.8	-17.1	325
	12	53.4	26.8	-2.0	355	42.7	37.7	-19.1	333
	13	51.9	35.8	-2.8	355	41.0	50.6	-17.3	341
	14	50.4	44.7	-3.5	355	41.4	59.2	-14.0	347
	15	48.9	53.6	-4.2	355	43.7	66.0	-11.3	350
	16	47.4	62.6	-5.0	355	44.0	68.3	-8.5	353
M	17	45.9	71.5	-5.7	355	45.9	71.5	-5.7	355
L	18	47.5	-66.6	39.0	150	47.5	-66.6	39.0	150
	19	52.7	-33.3	19.6	150	48.9	-58.8	35.8	149
Z	20	57.9	0.0	0.1	90	57.9	0.0	0.1	90
	21	51.9	35.8	-2.8	355	41.0	50.6	-17.3	341
M	22	45.9	71.5	-5.7	355	45.9	71.5	-5.7	355


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
Regularity
 $g^* = 8.5$
Leaf green - Magenta red
rgb: L - Z - M
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 14.5$
 $\Delta E^*_{CIELAB} = 15.3$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 10.2$
 $\Delta E^*_{CIELAB} = 10.8$

YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
L	1	51.5	-61.7	33.8	151	51.5	-61.7	33.8	151
	2	51.7	-54.2	30.3	151	53.1	-52.9	28.3	152
	3	52.0	-46.7	26.9	150	53.4	-44.7	23.0	153
	4	52.2	-39.2	23.4	149	53.9	-38.4	19.0	154
	5	52.5	-31.8	20.0	148	53.3	-31.9	16.6	153
	6	52.8	-24.3	16.5	146	53.1	-25.8	14.0	152
	7	53.0	-16.8	13.0	142	53.3	-18.8	11.3	149
	8	53.3	-9.3	9.6	134	53.8	-10.9	9.0	141
Z	9	53.5	-1.8	6.1	107	53.5	-1.8	6.1	107
	10	52.7	6.0	4.8	39	53.3	7.6	3.9	27
	11	51.8	13.9	3.4	14	52.7	18.3	1.8	6
	12	51.0	21.7	2.1	5	53.3	27.5	-1.0	358
	13	50.2	29.6	0.8	1	51.5	37.1	-3.6	354
	14	49.3	37.5	-0.5	359	50.5	43.4	-3.5	355
	15	48.5	45.4	-1.8	358	48.9	49.5	-5.0	354
	16	47.6	53.2	-3.2	356	47.9	55.4	-5.6	354
M	17	46.8	61.1	-4.5	356	46.8	61.1	-4.5	356
L	18	51.5	-61.7	33.8	151	51.5	-61.7	33.8	151
	19	52.5	-31.8	20.0	148	53.3	-31.9	16.6	153
Z	20	53.5	-1.8	6.1	107	53.5	-1.8	6.1	107
	21	50.2	29.6	0.8	1	51.5	37.1	-3.6	354
M	22	46.8	61.1	-4.5	356	46.8	61.1	-4.5	356

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
Regularity
 $g^* = 4.8$
Leaf green - Magenta red
cmy0: L - Z - M
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 3.5$
 $\Delta E^*_{CIELAB} = 3.6$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.4$
 $\Delta E^*_{CIELAB} = 2.5$

YE311-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

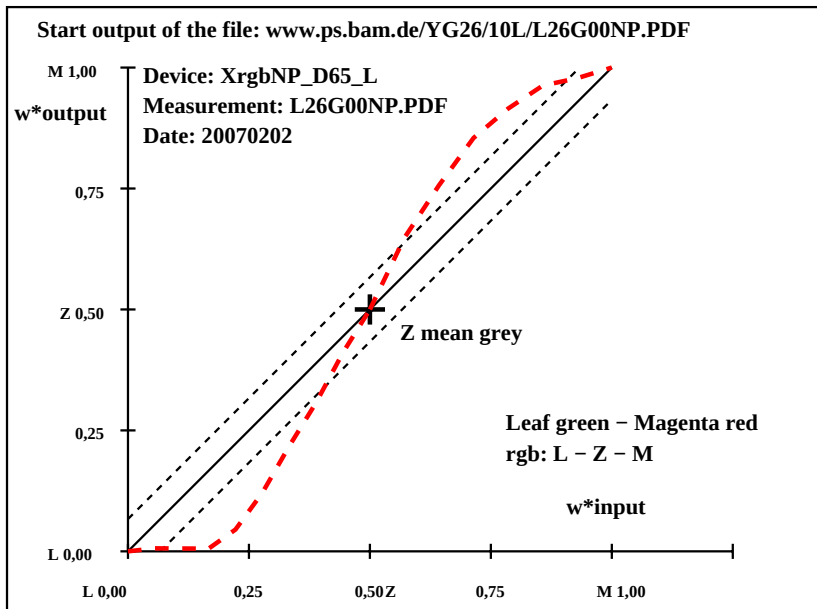

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

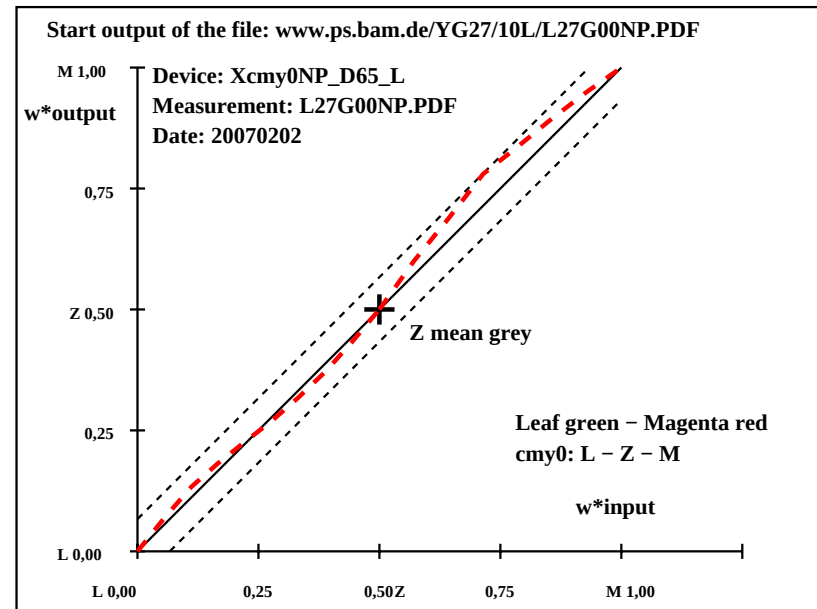

YE311-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202