


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH* ΔE*	Start output S1
R	1	34.0	31.3	14.6	25	35.8 34.4 29.4 41	1.9 3.1 14.8 15.1 15.2	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	36.1	26.4	23.6	42	36.9 30.7 31.1 45	0.8 4.3 7.5 8.7 8.7	
	3	40.5	18.8	30.7	58	41.3 20.1 38.2 62	0.8 1.3 7.5 7.6 7.7	
	4	45.5	10.2	38.7	75	51.7 0.1 54.2 90	6.2-10.0 15.5 18.5 19.5	
J	5	52.4	-1.6	49.9	92	59.6-11.9 66.0 100	7.3-10.2 16.1 19.1 20.4	
	6	49.6-15.8	45.0	110	55.0-21.3	57.0 111	5.4 -5.4 12.0 13.2 14.2	
	7	42.1-24.2	32.3	127	45.6-37.7	39.7 134	3.5-13.4 7.4 15.4 15.7	
	8	36.1-31.0	22.2	145	40.7-47.2	30.7 147	4.6-21.3 8.5 18.3 18.9	
G	9	34.2-28.5	9.3	162	38.5-49.9	26.9 152	4.2-16.1 17.6 27.7 28.0	
	10	35.0-21.1	-3.4	190	33.8-38.0	16.0 157	-1.1-16.8 19.5 25.9 25.9	
C	11	35.5-16.0	-12.1	217	37.0-19.8	-26.7 233	1.4 -3.7-14.5 15.1 15.2	
	12	36.1-10.4	-21.8	245	32.2 -4.0-35.3	263	-3.9 6.4-13.4 14.9 15.4	(Red-Yellow-Green-Blue)n
B	13	30.0 0.9-24.5	272	28.4 1.4-34.1	272	-1.5 0.5-9.5	9.6 9.8	rgb: (R-J-G-B-R)n
	14	31.1 10.8-18.4	300	26.0 15.0-40.0	291	-4.9 4.2-21.5	22.0 22.6	
M	15	32.2 20.5-12.4	329	30.4 41.8-20.6	334	-1.7 21.3 -8.1	22.8 22.9	Mean CIELAB difference (17 steps)
	16	33.9 35.4 -1.9	357	31.8 40.2 1.2	2	-2.0 4.8 3.2	5.8 6.2	ΔH*CIELAB = 15.3
R	17	34.0 31.3 14.6	25	36.1 34.0 29.6	41	2.2 2.7 15.0	15.2 15.4	ΔE*CIELAB = 16.6
R	18	34.0 31.3 14.6	25	35.8 34.4 29.4	41	1.9 3.1 14.8	15.1 15.2	
J	19	52.4 -1.6	49.9 92	59.6-11.9	66.0 100	7.3-10.2	16.1 19.1 20.4	
G	20	34.2-28.5	9.3 162	38.5-49.9	26.9 152	4.2-21.3	17.6 27.7 28.0	Mean CIELAB difference (5 steps)
B	21	30.0 0.9-24.5	272	28.4 1.4-34.1	272	-1.5 0.5-9.5	9.6 9.8	ΔH*CIELAB = 14.3
R	22	34.0 31.3 14.6	25	36.1 34.0 29.6	41	2.2 2.7 15.0	15.2 15.4	ΔE*CIELAB = 17.6


YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref		hab,ref	LAB*a,out		hab,out	LAB*a,out-ref		ΔH*	ΔE*	Start output S1				
R	1	36.7	30.5	14.2	25	39.2	34.5	20.8	31	2.4	4.0	6.6	7.7	8.1	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G	
	2	37.7	28.1	25.1	42	42.0	25.1	27.0	47	4.3	-2.9	1.9	3.6	5.6		
	3	42.5	19.8	32.3	58	45.8	14.1	34.7	68	3.2	-5.6	2.4	6.2	7.0		
	4	47.9	10.6	40.1	75	50.3	2.2	42.4	87	2.4	-8.3	2.3	8.7	9.0		
J	5	55.0	-1.7	50.7	92	53.5	-8.0	48.6	99	-1.4	-6.2	-2.0	6.7	6.8		
	6	52.4	-15.5	44.1	110	49.7	-15.8	40.0	112	-2.5	-0.2	-4.0	4.1	4.9		
	7	45.5	-23.2	31.0	127	46.5	-22.8	32.1	126	1.0	0.4	1.1	1.2	1.6		
	8	40.2	-29.1	20.9	145	43.1	-29.3	24.1	141	2.9	-0.1	3.2	3.2	4.3		
G	9	38.6	-27.2	8.9	162	40.3	-35.3	15.4	156	1.7	-8.0	6.5	10.4	10.6	(Red-Yellow-Green-Blue)n cmy0: (R-J-G-B-R)n	
	10	39.7	-19.9	-3.3	190	40.6	-30.5	0.0	180	0.9	-10.5	3.4	11.1	11.1		
C	11	40.5	-15.1	-11.4	217	41.5	-24.3	-10.5	203	1.0	-9.1	0.9	9.2	9.3		Mean CIELAB difference (17 steps)
	12	41.3	-9.7	-20.5	245	34.2	-8.9	-15.0	239	-7.0	0.8	5.5	5.6	9.0		
B	13	33.6	0.7	-19.1	272	27.3	9.4	-19.1	296	-6.2	8.7	0.0	8.7	10.7	Mean CIELAB difference (5 steps)	
	14	26.4	10.4	-17.7	300	30.8	21.9	-14.1	327	4.4	11.5	3.6	12.1	12.8		
M	15	30.6	19.0	-11.5	329	36.8	36.5	-3.1	355	6.2	17.5	8.4	19.4	20.4	ΔH*CIELAB = 7.5 ΔE*CIELAB = 8.6	
	16	36.9	31.3	-1.7	357	36.5	35.4	6.7	11	-0.3	4.1	8.5	9.4	9.4		
R	17	36.7	30.5	14.2	25	37.0	34.9	18.3	28	0.2	4.4	4.1	6.0	6.0		
	18	36.7	30.5	14.2	25	39.2	34.5	20.8	31	2.4	4.0	6.6	7.7	8.1		
J	19	55.0	-1.7	50.7	92	53.5	-8.0	48.6	99	-1.4	-6.2	-2.0	6.7	6.8		
G	20	38.6	-27.2	8.9	162	40.3	-35.3	15.4	156	1.7	-8.0	6.5	10.4	10.6		
B	21	33.6	0.7	-19.1	272	27.3	9.4	-19.1	296	-6.2	8.7	0.0	8.7	10.7	ΔH*CIELAB = 6.7 ΔE*CIELAB = 8.6	
	22	36.7	30.5	14.2	25	37.0	34.9	18.3	28	0.2	4.4	4.1	6.0	6.0		

YE311-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

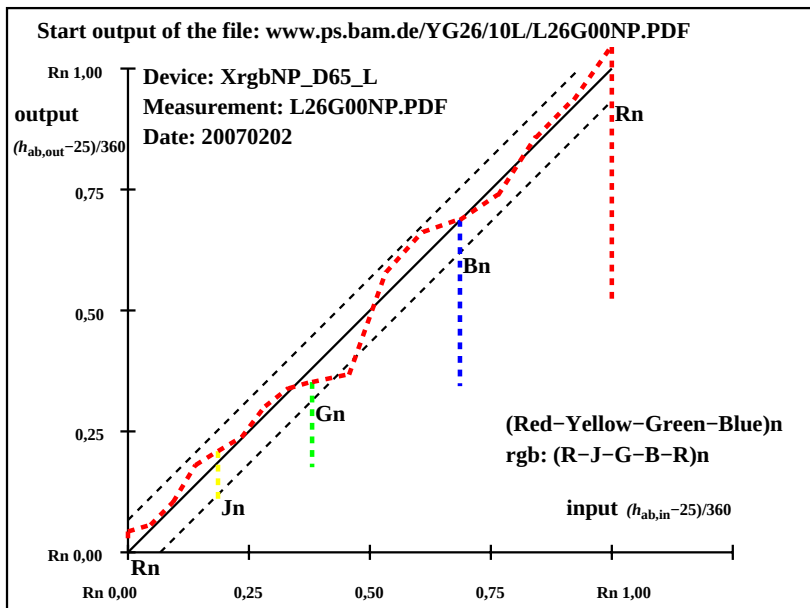

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

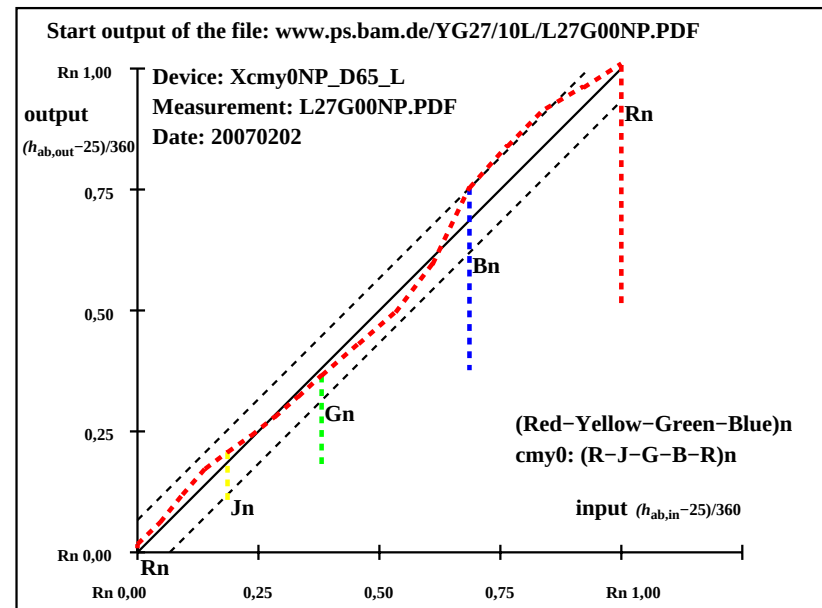

YE311-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202