

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH*	ΔE*
R	1	70.9	31.3	14.6	25	61.7	40.1	18.3
	2	73.0	26.4	23.6	42	70.5	23.3	29.4
	3	77.4	18.8	30.7	58	78.0	9.4	42.3
	4	82.4	10.2	38.7	75	86.6	-4.7	54.9
J	5	89.3	-1.6	49.9	92	92.1	-16.1	74.7
	6	86.5	-15.8	45.0	110	84.8	-23.4	64.8
	7	79.0	-24.2	32.3	127	72.7	-34.2	52.4
	8	73.0	-31.0	22.2	145	61.7	-46.1	41.5
G	9	71.1	-28.5	9.3	162	56.1	-53.3	38.6
	10	71.9	-21.1	-3.4	190	59.5	-43.4	12.4
C	11	72.4	-16.0	-12.1	217	60.8	-15.7	-38.9
	12	73.0	-10.4	-21.8	245	62.9	-8.2	-28.6
B	13	66.9	0.9	-24.5	272	58.8	-0.2	-35.4
	14	68.0	10.8	-18.4	300	54.8	23.8	-26.4
M	15	69.1	20.5	-12.4	329	61.0	47.4	-11.6
	16	70.8	35.4	-1.9	357	59.0	43.8	-3.7
R	17	70.9	31.3	14.6	25	63.0	38.0	17.6
	18	70.9	31.3	14.6	25	61.7	40.1	18.3
J	19	89.3	-1.6	49.9	92	92.1	-16.1	74.7
	20	71.1	-28.5	9.3	162	56.1	-53.3	38.6
G	21	66.9	0.9	-24.5	272	58.8	-0.2	-35.4
B	22	70.9	31.3	14.6	25	63.0	38.0	17.6

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

(Red-Yellow-Green-Blue)w
rgb: (R-J-G-B-R)w

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 18.3$
 $\Delta E^*_{CIELAB} = 21.1$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 17.5$
 $\Delta E^*_{CIELAB} = 19.5$

YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out-ref	ΔH*	ΔE*
R	1	71.0	30.5	14.2	25	68.2	26.2	32.5
	2	72.0	28.1	25.1	42	74.7	15.5	37.8
	3	76.8	19.8	32.3	58	80.4	4.7	42.7
	4	82.1	10.6	40.1	75	87.3	-5.0	49.1
J	5	89.2	-1.7	50.7	92	92.9	-13.7	54.2
	6	86.6	-15.5	44.1	110	85.5	-17.6	42.2
	7	79.7	-23.2	31.0	127	78.5	-18.0	33.0
	8	74.4	-29.1	20.9	145	72.6	-20.5	24.2
G	9	72.8	-27.2	8.9	162	68.6	-24.3	17.9
	10	74.0	-19.9	-3.3	190	70.6	-19.8	1.2
C	11	74.7	-15.1	-11.4	217	74.1	-13.4	-17.9
	12	75.5	-9.7	-20.5	245	64.4	-0.6	-19.9
B	13	67.8	0.7	-19.1	272	55.4	10.5	-24.2
	14	60.6	10.4	-17.7	300	63.0	17.3	-12.5
M	15	64.8	19.0	-11.5	329	70.0	23.0	-1.0
	16	71.1	31.3	-1.7	357	66.8	24.3	15.9
R	17	71.0	30.5	14.2	25	66.7	28.2	31.5
	18	71.0	30.5	14.2	25	68.2	26.2	32.5
J	19	89.2	-1.7	50.7	92	92.9	-13.7	54.2
	20	72.8	-27.2	8.9	162	68.6	-24.3	17.9
G	21	67.8	0.7	-19.1	272	55.4	10.5	-24.2
B	22	71.0	30.5	14.2	25	66.7	28.2	31.5


Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

(Red-Yellow-Green-Blue)w
cmy0: (R-J-G-B-R)w


Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 10.8$
 $\Delta E^*_{CIELAB} = 12.9$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 10.4$
 $\Delta E^*_{CIELAB} = 14.9$

YE311-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

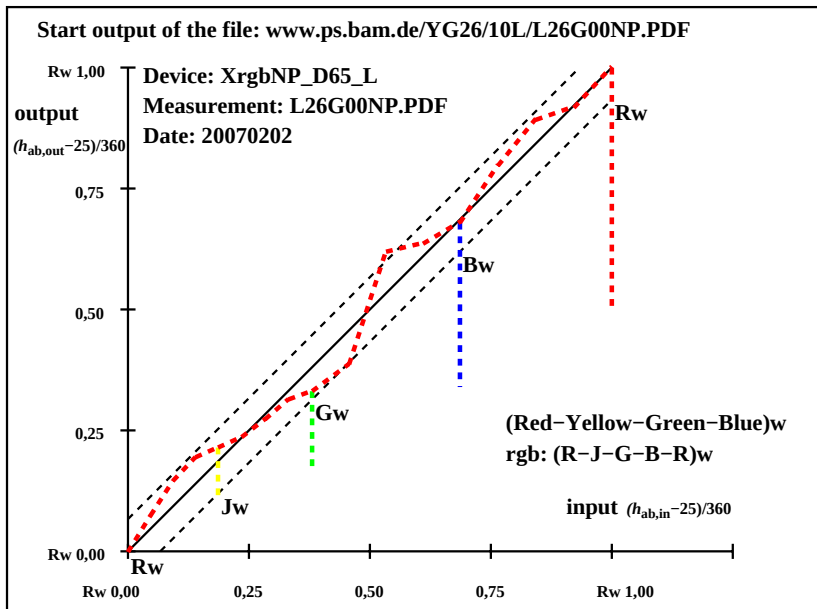

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

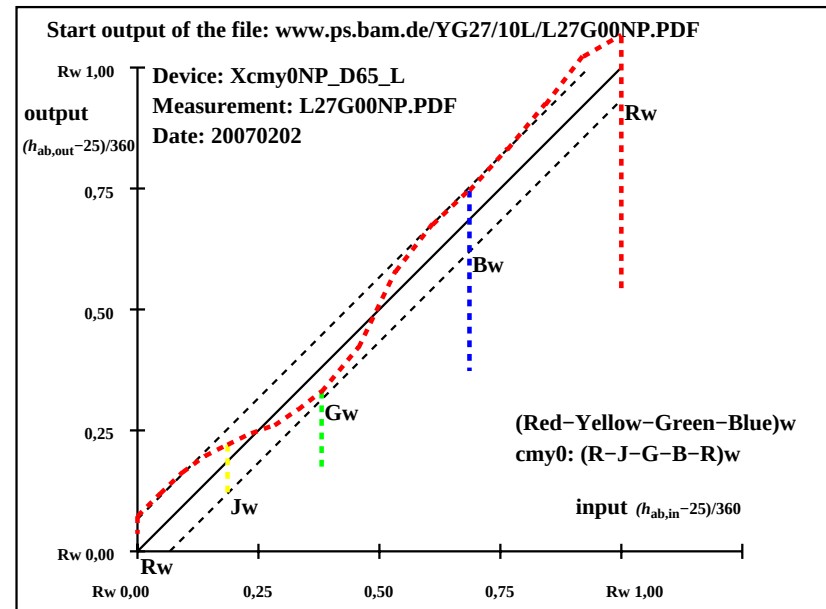

YE311-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202