

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	21.7	0.0	0.0	0.0	0.0	0.0	0.0
	2	26.3	0.0	0.0	0.0	-3.5	0.0	3.6
	3	30.9	0.0	0.0	0.1	-5.9	0.1	6.0
	4	35.5	0.0	0.0	0.0	-6.3	0.0	6.4
	5	40.1	0.0	0.0	0.0	-5.3	0.0	5.4
	6	44.7	0.0	0.0	0.0	-3.8	0.0	3.9
	7	49.3	0.0	0.0	0.2	-3.6	0.2	3.7
	8	53.9	0.0	0.0	0.1	-1.3	0.1	1.4
Z	9	58.6	0.0	0.0	0.2	0.1	0.2	0.2
	10	63.2	0.0	0.0	0.2	1.3	0.2	1.3
	11	67.8	0.0	0.0	0.2	1.6	0.2	1.6
	12	72.4	0.0	0.0	0.2	1.9	0.2	1.9
	13	77.0	0.0	0.0	0.1	2.1	0.1	2.1
	14	81.6	0.0	0.0	0.0	1.4	0.0	1.4
	15	86.2	0.0	0.0	0.1	0.2	0.1	0.2
	16	90.8	0.0	0.0	0.2	-1.1	0.2	1.2
W	17	95.5	0.0	0.0	0.0	0.0	0.0	0.0
N	18	21.7	0.0	0.0	0.0	0.0	0.0	0.0
	19	40.1	0.0	0.0	0.0	-5.3	0.0	5.4
Z	20	58.6	0.0	0.0	0.2	0.1	0.2	0.2
	21	77.0	0.0	0.0	0.1	2.1	0.1	2.1
W	22	95.5	0.0	0.0	0.0	0.0	0.0	0.0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.46 - 21.66$
Regularity
 $g^* = 54.2$
Lightness gamut relative to offset
 $f^* = 95.3$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 2.4$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 1.6$
Mean colour reproduction index: $R^*_{ab,m} = 90$

YE310-3N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*
N	1	21.7	0.0	0.0	0.0	0.0	0.0	0.0
	2	26.3	0.0	0.0	0.0	-3.5	0.0	3.6
	3	30.9	0.0	0.0	0.1	-5.9	0.1	6.0
	4	35.5	0.0	0.0	0.0	-6.3	0.0	6.4
	5	40.1	0.0	0.0	0.0	-5.3	0.0	5.4
	6	44.7	0.0	0.0	0.0	-3.8	0.0	3.9
	7	49.3	0.0	0.0	0.2	-3.6	0.2	3.7
	8	53.9	0.0	0.0	0.1	-1.3	0.1	1.4
Z	9	58.6	0.0	0.0	0.2	0.1	0.2	0.2
	10	63.2	0.0	0.0	0.2	1.3	0.2	1.3
	11	67.8	0.0	0.0	0.2	1.6	0.2	1.6
	12	72.4	0.0	0.0	0.2	1.9	0.2	1.9
	13	77.0	0.0	0.0	0.1	2.1	0.1	2.1
	14	81.6	0.0	0.0	0.0	1.4	0.0	1.4
	15	86.2	0.0	0.0	0.1	0.2	0.1	0.2
	16	90.8	0.0	0.0	0.2	-1.1	0.2	1.2
W	17	95.5	0.0	0.0	0.0	0.0	0.0	0.0
N	18	21.7	0.0	0.0	0.0	0.0	0.0	0.0
	19	40.1	0.0	0.0	0.0	-5.3	0.0	5.4
Z	20	58.6	0.0	0.0	0.2	0.1	0.2	0.2
	21	77.0	0.0	0.0	0.1	2.1	0.1	2.1
W	22	95.5	0.0	0.0	0.0	0.0	0.0	0.0

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.46 - 21.66$
Regularity
 $g^* = 54.2$
Lightness gamut relative to offset
 $f^* = 95.3$
Black - White
rgb: N - W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 2.4$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 0.1$
 $\Delta E^*_{CIELAB} = 1.6$
Mean colour reproduction index: $R^*_{ab,m} = 90$

YE311-3N, ; Device: XcmypNP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

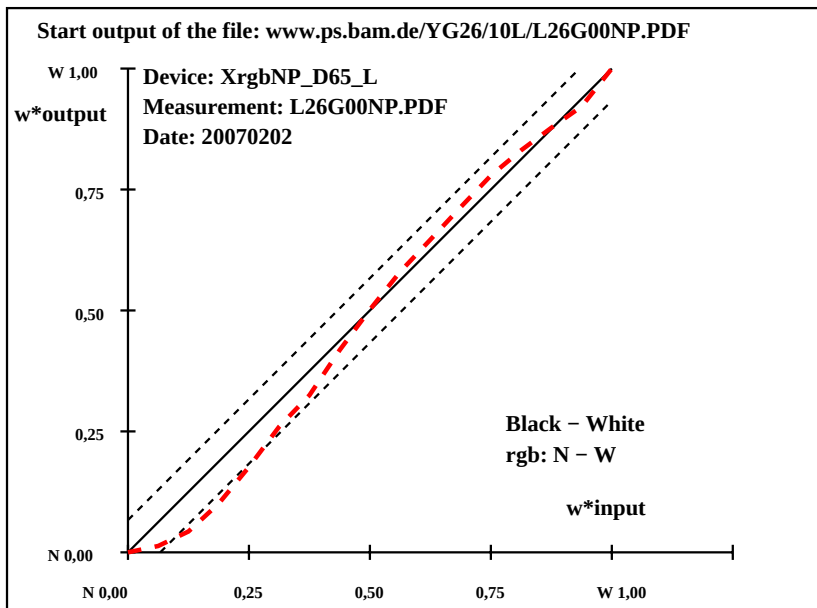

YE310-7N, ; Device: XrgbNP_D65_L; Measurement: L26G00NP.PDF; Date: 20070202

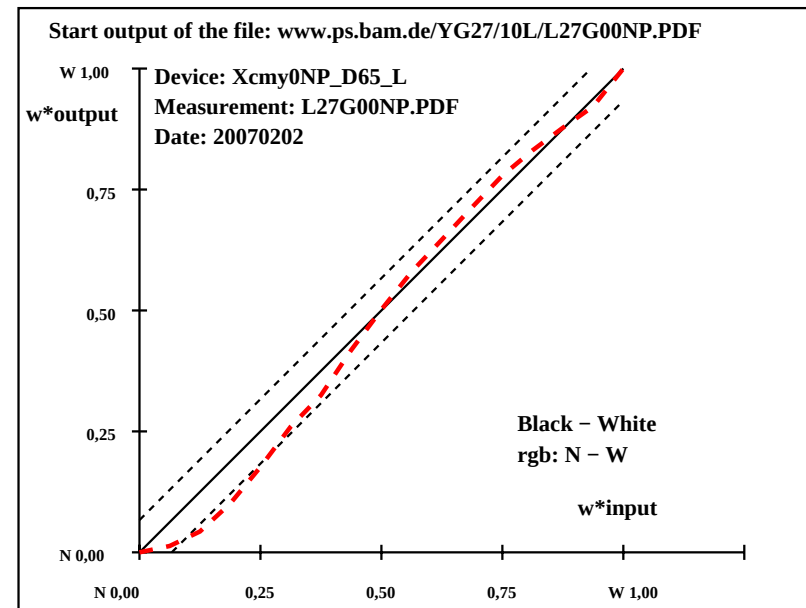

YE311-7N, ; Device: XcmypNP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202