

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
O	1	48.3	64.0	50.4	38	48.3	64.0	50.4	38
	2	51.2	60.0	47.3	38	49.9	61.7	49.7	39
	3	54.1	56.0	44.1	38	51.2	59.7	48.4	39
	4	57.1	52.0	41.0	38	53.2	56.4	44.4	38
	5	60.0	48.0	37.8	38	54.8	54.1	42.5	38
	6	62.9	44.0	34.7	38	57.5	49.8	40.2	39
	7	65.9	40.0	31.5	38	59.9	45.7	38.8	40
	8	68.8	36.0	28.4	38	63.9	39.2	37.2	44
	9	71.7	32.0	25.2	38	67.3	32.7	34.9	47
	10	74.7	28.0	22.1	38	71.1	25.4	33.5	53
	11	77.6	24.0	18.9	38	73.2	19.8	31.9	58
	12	80.5	20.0	15.8	38	76.4	13.8	29.1	65
	13	83.5	16.0	12.6	38	79.2	10.5	22.5	65
	14	86.4	12.0	9.5	38	82.1	7.5	16.8	66
	15	89.4	8.0	6.3	38	85.4	4.2	12.6	72
	16	92.3	4.0	3.2	38	88.4	3.7	5.7	57
W	17	95.2	0.0	0.0	0	95.2	0.0	0.0	0
O	18	48.3	64.0	50.4	38	48.3	64.0	50.4	38
	19	60.0	48.0	37.8	38	54.8	54.1	42.5	38
	20	71.7	32.0	25.2	38	67.3	32.7	34.9	47
	21	83.5	16.0	12.6	38	79.2	10.5	22.5	65
W	22	95.2	0.0	0.0	0	95.2	0.0	0.0	0


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.23 - 48.25$
Regularity
 $g^* = 40.8$
Lightness gamut relative to offset
 $f^* = 60.7$
Orange red – White
rgb: O – W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 7.6$
 $\Delta E^*_{CIELAB} = 8.5$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 5.8$
 $\Delta E^*_{CIELAB} = 6.4$
Mean colour reproduction index: $R^*_{ab,m} = 63$

YE320-3N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
O	1	46.3	60.1	47.0	38	46.3	60.1	47.0	38
	2	49.4	56.3	44.1	38	48.0	57.7	46.4	39
	3	52.4	52.6	41.1	38	49.4	55.6	45.1	39
	4	55.5	48.8	38.2	38	51.6	52.3	41.3	38
	5	58.6	45.1	35.3	38	53.2	49.9	39.4	38
	6	61.6	41.3	32.3	38	56.0	45.6	37.5	39
	7	64.7	37.6	29.4	38	58.5	41.5	36.2	41
	8	67.7	33.8	26.4	38	62.8	34.9	35.0	45
	9	70.8	30.1	23.5	38	66.3	28.5	33.0	49
	10	73.9	26.3	20.6	38	70.3	21.3	31.9	56
	11	76.9	22.5	17.6	38	72.5	15.9	30.7	63
	12	80.0	18.8	14.7	38	75.9	10.2	28.2	70
	13	83.1	15.0	11.8	38	78.8	7.6	21.7	71
	14	86.1	11.3	8.8	38	81.9	5.3	16.2	72
	15	89.2	7.5	5.9	38	85.2	2.6	12.2	78
	16	92.2	3.8	2.9	38	88.3	2.8	5.5	63
W	17	95.3	0.0	0.0	0	95.3	0.0	0.0	0
O	18	46.3	60.1	47.0	38	46.3	60.1	47.0	38
	19	58.6	45.1	35.3	38	53.2	49.9	39.4	38
	20	70.8	30.1	23.5	38	66.3	28.5	33.0	49
	21	83.1	15.0	11.8	38	78.8	7.6	21.7	71
W	22	95.3	0.0	0.0	0	95.3	0.0	0.0	0

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 95.3 - 46.32$
Regularity
 $g^* = 41.7$
Lightness gamut relative to offset
 $f^* = 63.3$
Orange red – White
cmy0: O – W
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 7.5$
 $\Delta E^*_{CIELAB} = 8.5$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 5.7$
 $\Delta E^*_{CIELAB} = 6.4$
Mean colour reproduction index: $R^*_{ab,m} = 63$

YE321-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

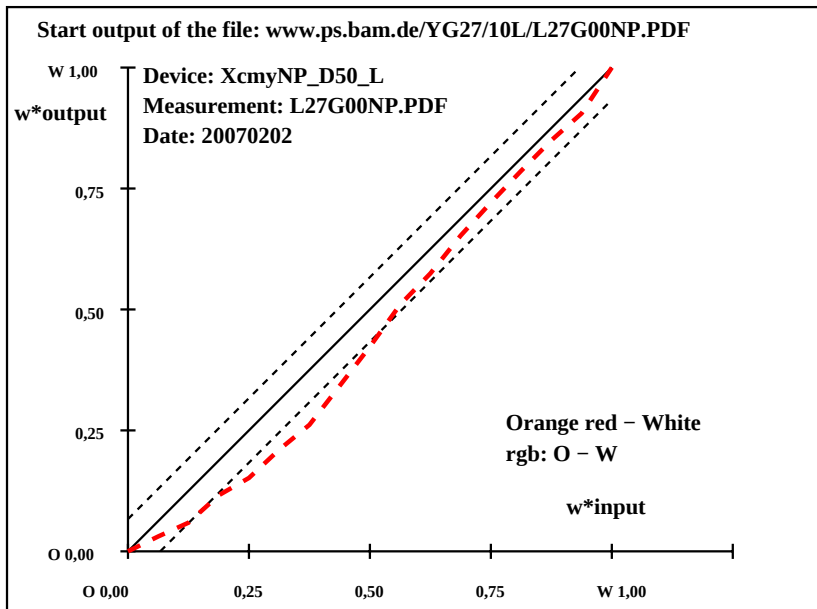

YE320-7N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

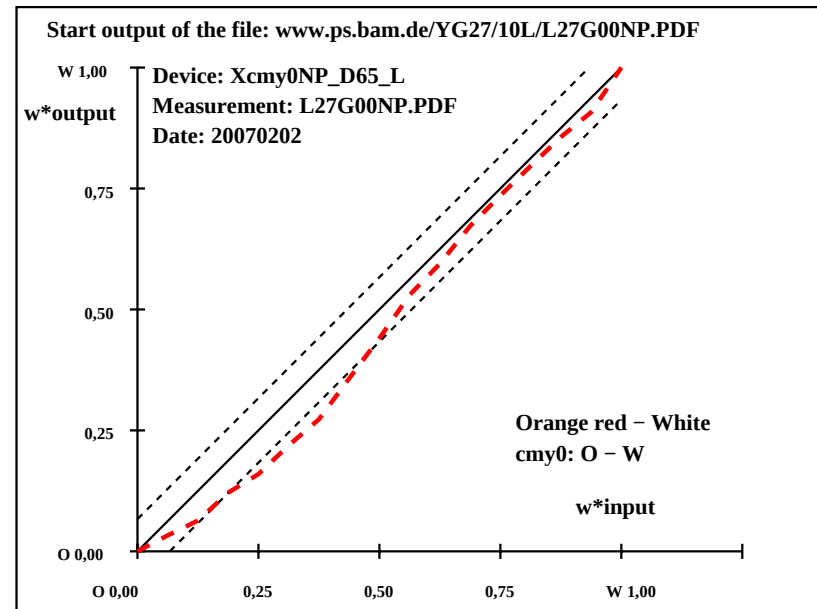

YE321-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202