


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start output S1								
L	1	48.1	-60.6	30.3	153	48.1	-60.6	30.3	153	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" ΔL* = 95.31 – 48.06 Regularity g* = 63.5 Lightness gamut relative to offset f* = 61.0		
	2	51.0	-56.8	28.4	153	50.8	-55.0	28.4	153	-0.2	1.8	0.0	1.8			
	3	54.0	-53.0	26.5	153	53.2	-51.0	25.2	154	-0.7	2.0	-1.2	2.4			
	4	56.9	-49.2	24.6	153	54.7	-45.6	18.9	158	-2.2	3.6	-5.6	6.8			
	5	59.9	-45.4	22.7	153	57.5	-39.9	18.2	156	-2.3	5.5	-4.4	7.1			
	6	62.8	-41.6	20.8	153	59.5	-35.7	16.2	156	-3.2	5.9	-4.5	7.5			
	7	65.8	-37.8	18.9	153	61.5	-30.6	16.2	152	-4.2	7.2	-2.6	7.7			
	8	68.7	-34.0	17.0	153	64.1	-26.2	16.8	147	-4.5	7.8	-0.1	7.8			
	9	71.7	-30.3	15.2	153	66.9	-22.8	16.3	145	-4.7	7.5	1.1	7.5			
	10	74.6	-26.5	13.3	153	69.7	-19.9	16.2	141	-4.9	6.6	2.9	7.2			
	11	77.6	-22.7	11.4	153	72.8	-17.1	17.4	135	-4.7	5.6	6.0	8.2			
	12	80.5	-18.9	9.5	153	76.0	-15.2	13.4	139	-4.4	3.7	3.9	5.4			
	13	83.5	-15.1	7.6	153	80.6	-13.9	11.4	141	-2.8	1.2	3.0	4.0			
	14	86.5	-11.3	5.7	153	84.1	-10.8	8.5	142	-2.3	0.5	2.8	2.9			
	15	89.4	-7.5	3.8	153	87.3	-8.0	6.3	142	-2.0	-0.4	2.5	2.6			
W	16	92.4	-3.7	1.9	153	90.0	-4.8	1.8	160	-2.2	-1.0	0.0	1.1	Mean CIELAB difference (17 steps) ΔH*CIELAB = 4.7 ΔE*CIELAB = 5.5		
	17	95.3	0.0	0.0	0	95.3	0.0	0.0	0	0.0	0.0	0.0	0.0			
	L	18	48.1	-60.6	30.3	153	48.1	-60.6	30.3	153	0.0	0.0	0.0		0.0	Mean CIELAB difference (5 steps) ΔH*CIELAB = 3.7 ΔE*CIELAB = 4.3
		19	59.9	-45.4	22.7	153	57.5	-39.9	18.2	156	-2.3	5.5	-4.4		7.1	
		20	71.7	-30.3	15.2	153	66.9	-22.8	16.3	145	-4.7	7.5	1.1		7.5	
21		83.5	-15.1	7.6	153	80.6	-13.9	11.4	141	-2.8	1.2	3.8	4.0			
W	22	95.3	0.0	0.0	0	95.3	0.0	0.0	0	0.0	0.0	0.0	0.0			
Mean colour reproduction index: R*ab,m = 76																


YE320-3N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH*	ΔE*	Start output S1					
L	1	48.9	-63.5	33.0	153	48.9	-63.5	33.0	153	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" ΔL* = 95.38 - 48.9 Regularity g* = 62.1 Lightness gamut relative to offset f* = 60.1 Leaf green – White cmy0: L – W Mean CIELAB difference (17 steps) ΔH*CIELAB = 4.6 ΔE*CIELAB = 5.5 Mean CIELAB difference (5 steps) ΔH*CIELAB = 3.6 ΔE*CIELAB = 4.2
	2	51.8	-59.5	30.9	153	51.5	-57.8	30.8	152	-0.2	1.7	0.0	1.7	
	3	54.7	-55.6	28.9	153	54.0	-53.6	27.4	153	-0.7	1.9	-1.4	2.4	
	4	57.6	-51.6	26.8	153	55.4	-47.5	21.0	156	-2.1	4.1	-5.7	7.1	
	5	60.5	-47.6	24.8	153	58.2	-41.9	20.1	154	-2.3	5.7	-4.5	7.4	
	6	63.4	-43.6	22.7	153	60.1	-37.5	17.9	155	-3.2	6.1	-4.7	7.8	
	7	66.3	-39.7	20.6	153	62.0	-32.4	17.6	152	-4.2	7.3	-2.9	7.9	
	8	69.2	-35.7	18.6	153	64.5	-28.1	18.0	147	-4.6	7.6	-0.5	7.6	
	9	72.1	-31.7	16.5	153	67.2	-24.7	17.4	145	-4.8	7.0	0.9	7.1	
	10	75.0	-27.7	14.4	153	70.0	-21.8	17.1	142	-5.0	5.9	2.7	6.5	
	11	78.0	-23.7	12.4	153	73.1	-19.2	18.2	137	-4.8	4.5	5.8	7.4	
	12	80.9	-19.8	10.3	153	76.3	-16.9	14.1	140	-4.5	2.9	3.8	4.8	
	13	83.8	-15.8	8.3	153	80.8	-15.3	12.0	142	-2.9	0.5	3.8	3.8	
	14	86.7	-11.8	6.2	153	84.3	-11.8	9.0	143	-2.3	0.0	2.8	2.8	
	15	89.6	-7.9	4.1	153	87.5	-8.7	6.7	143	-2.0	-0.7	2.6	2.7	
	16	92.5	-3.9	2.1	153	90.2	-5.0	2.0	159	-2.2	-1.0	0.0	1.1	
W	17	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	
L	18	48.9	-63.5	33.0	153	48.9	-63.5	33.0	153	0.0	0.0	0.0	0.0	
	19	60.5	-47.6	24.8	153	58.2	-41.9	20.1	154	-2.3	5.7	-4.5	7.4	
	20	72.1	-31.7	16.5	153	67.2	-24.7	17.4	145	-4.8	7.0	0.9	7.1	
	21	83.8	-15.8	8.3	153	80.8	-15.3	12.0	142	-2.9	0.5	3.8	3.8	
W	22	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	
Mean colour reproduction index:											R* _{ab,m} = 76			

YE321-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

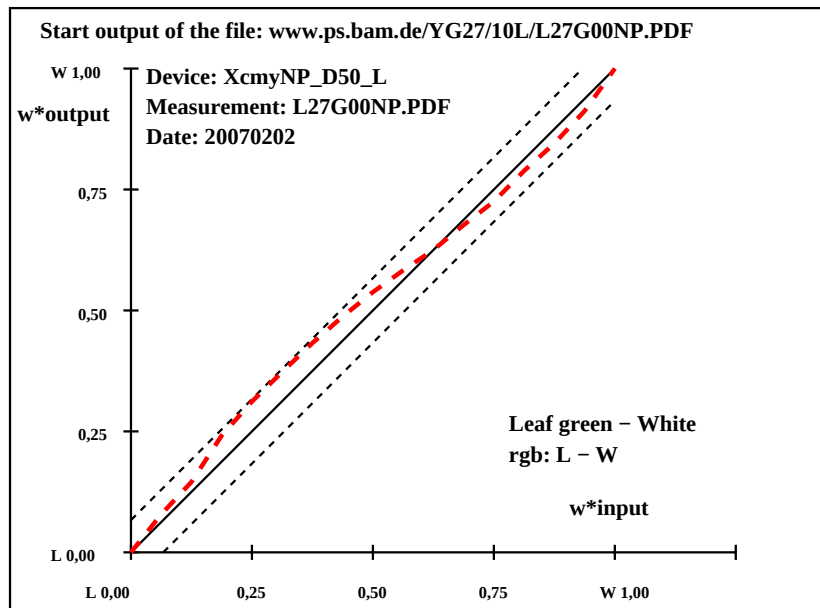

YE320-7N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

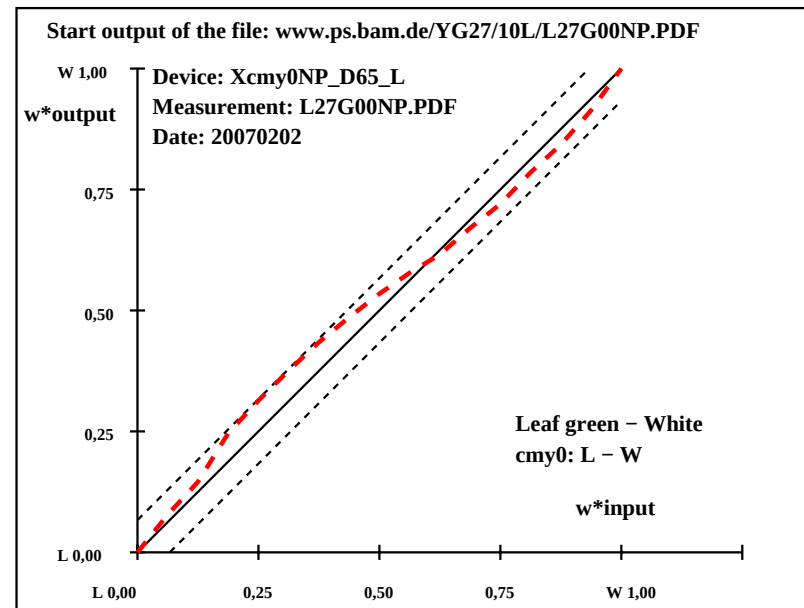

YE321-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202