

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
N	1	28.3	4.2	1.6	21	28.3	4.2	1.6	21
	2	32.2	3.3	8.4	68	30.6	2.3	5.1	66
	3	36.1	2.4	15.2	81	33.3	0.0	9.6	91
	4	40.1	1.6	22.1	86	36.3	-1.4	15.0	96
	5	44.0	0.7	28.9	89	38.8	-1.3	22.3	94
	6	48.0	-0.1	35.7	90	41.5	-3.3	29.3	97
	7	51.9	-1.0	42.5	91	44.3	-2.3	36.7	94
	8	55.9	-1.9	49.3	92	47.9	-2.8	42.0	94
	9	59.8	-2.8	56.2	93	51.5	-2.8	48.4	93
	10	63.8	-3.6	63.0	93	55.5	-2.7	55.0	93
	11	67.7	-4.5	69.8	94	58.8	-2.5	60.5	92
	12	71.7	-5.4	76.6	94	63.0	-3.9	67.6	93
	13	75.6	-6.3	83.4	94	67.2	-4.3	75.0	93
	14	79.6	-7.2	90.2	95	71.8	-5.1	81.8	94
	15	83.5	-8.0	97.1	95	77.1	-6.9	89.7	94
	16	87.5	-8.9	103.9	95	81.6	-6.5	96.4	94
Y	17	91.4	-9.8	110.7	95	91.4	-9.8	110.7	95
N	18	28.3	4.2	1.6	21	28.3	4.2	1.6	21
	19	44.0	0.7	28.9	89	38.8	-1.3	22.3	94
	20	59.8	-2.8	56.2	93	51.5	-2.8	48.4	93
	21	75.6	-6.3	83.4	94	67.2	-4.3	75.0	93
Y	22	91.4	-9.8	110.7	95	91.4	-9.8	110.7	95


Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.4 - 28.25$
Regularity
 $g^* = 43.6$
Lightness gamut relative to offset
 $f^* = 81.6$
Black - Yellow
rgb: N - Y
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 6.6$
 $\Delta E^*_{CIELAB} = 8.8$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 4.7$
 $\Delta E^*_{CIELAB} = 6.4$
Mean colour reproduction index: $R^*_{ab,m} = 62$

YE320-3N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
N	1	28.3	3.9	1.3	18	28.3	3.9	1.3	18
	2	32.2	2.6	8.2	73	30.6	1.5	4.9	73
	3	36.1	1.3	15.2	85	33.3	-1.4	9.5	99
	4	40.0	0.0	22.1	90	36.3	-3.5	15.1	103
	5	43.9	-1.2	29.0	93	38.7	-4.1	22.3	101
	6	47.8	-2.6	36.0	94	41.4	-6.7	29.5	103
	7	51.7	-3.9	42.9	95	44.1	-6.2	36.9	100
	8	55.6	-5.2	49.8	96	47.7	-7.1	42.3	100
	9	59.5	-6.5	56.7	97	51.3	-7.4	48.7	99
	10	63.4	-7.8	63.7	97	55.1	-7.7	55.4	98
	11	67.4	-9.1	70.6	97	58.4	-7.8	61.0	97
	12	71.3	-10.4	77.5	98	62.6	-9.5	68.2	98
	13	75.2	-11.8	84.5	98	66.8	-10.2	75.7	98
	14	79.1	-13.1	91.4	98	71.3	-11.2	82.6	98
	15	83.0	-14.4	98.3	98	76.6	-13.3	90.7	98
	16	86.9	-15.7	105.3	99	81.0	-13.2	97.5	98
Y	17	90.8	-17.0	112.2	99	90.8	-17.0	112.2	99
N	18	28.3	3.9	1.3	18	28.3	3.9	1.3	18
	19	43.9	-1.2	29.0	93	38.7	-4.1	22.3	101
	20	59.5	-6.5	56.7	97	51.3	-7.4	48.7	99
	21	75.2	-11.8	84.5	98	66.8	-10.2	75.7	98
Y	22	90.8	-17.0	112.2	99	90.8	-17.0	112.2	99

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 90.8 - 28.27$
Regularity
 $g^* = 43.4$
Lightness gamut relative to offset
 $f^* = 80.8$
Black - Yellow
cmy0: N - Y
Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 6.8$
 $\Delta E^*_{CIELAB} = 9.0$
Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 4.9$
 $\Delta E^*_{CIELAB} = 6.6$
Mean colour reproduction index: $R^*_{ab,m} = 61$

YE321-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

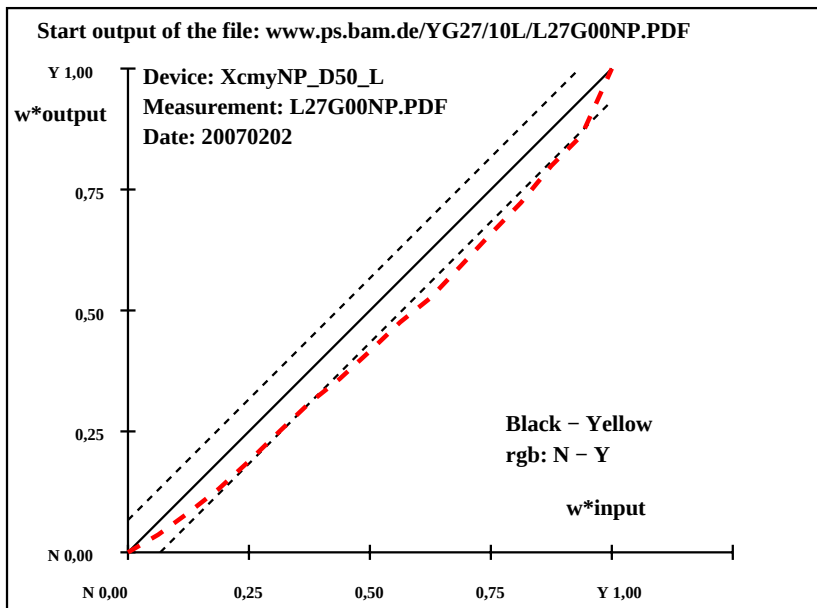

YE320-7N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

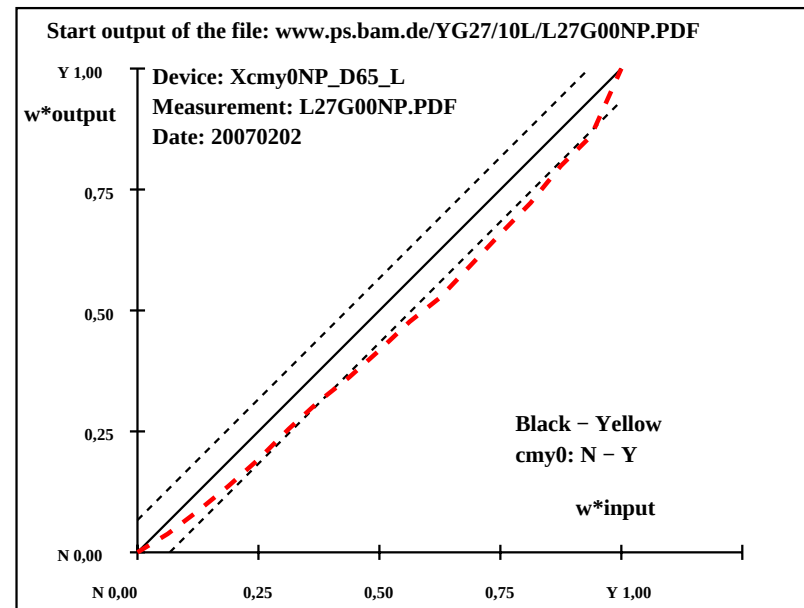

YE321-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202