


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start output S1											
N	1	29.3	1.9	0.8	23	29.3	1.9	0.8					23	0.0	0.0	0.0	0.0	0.0	0.0	Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
	2	30.5	5.6	0.7	7	30.3	6.4	0.0					0	0.0	-0.6	1.0	1.0			relative CIELAB data used for "out"
	3	31.7	9.4	0.5	3	30.5	11.1	-0.9					355	-1.0	1.7	-1.4	2.3	2.6		
	4	32.9	13.1	0.4	2	31.6	16.7	-0.9					357	-1.2	3.6	-1.3	3.9	4.1		
	5	34.1	16.8	0.3	1	32.2	21.9	-0.7					358	-1.8	5.1	-1.0	5.2	5.5	$\Delta L^* = 48.6 - 29.25$	
	6	35.3	20.6	0.1	0	33.4	25.4	0.0					0	-1.8	4.8	0.0	4.8	5.2	Regularity	
	7	36.5	24.3	0.0	0	34.5	30.3	0.4					1	-1.9	6.0	0.4	6.0	6.4	$g^* = 43.8$	
	8	37.7	28.0	0.0	360	35.8	34.3	0.2					0	-1.9	6.3	0.3	6.3	6.6		
	9	38.9	31.7	-0.1	360	36.7	38.4	0.1					0	-2.1	6.7	0.3	6.7	7.0	Lightness gamut relative to offset	
	10	40.1	35.5	-0.3	359	39.3	43.7	-0.3					359	-0.7	8.2	0.0	8.2	8.3	$f^* = 25.0$	
	11	41.3	39.2	-0.4	359	40.9	48.3	-1.4					358	-0.4	9.1	-0.9	9.1	9.2		
	12	42.6	42.9	-0.5	359	42.7	51.3	-2.4					357	0.1	8.4	-1.8	8.6	8.6	Black - Magenta red	
	13	43.8	46.7	-0.7	359	43.5	55.4	-1.6					358	-0.2	8.7	-0.8	8.8	8.8	rgb: N - M	
	14	45.0	50.4	-0.8	359	44.5	57.8	-1.6					358	-0.4	7.4	-0.7	7.4	7.5		
	15	46.2	54.1	-0.9	359	46.0	59.0	-1.5					358	-0.1	4.9	-0.5	4.9	4.9	Mean CIELAB difference (17 steps)	
	16	47.4	57.9	-1.1	359	46.9	60.4	-2.1					358	-0.4	2.5	-0.9	2.7	2.8	$\Delta H^*_{CIELAB} = 5.1$	
M	17	48.6	61.6	-1.2	359	48.6	61.6	-1.2	359	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 5.2$					
N	18	29.3	1.9	0.8	23	29.3	1.9	0.8	23	0.0	0.0	0.0	0.0	0.0						
	19	34.1	16.8	0.3	1	32.2	21.9	-0.7	358	-1.8	5.1	-1.0	5.2	5.5						
	20	38.9	31.7	-0.1	360	36.7	38.4	0.1	0	-2.1	6.7	0.3	6.7	7.0	Mean CIELAB difference (5 steps)					
	21	43.8	46.7	-0.7	359	43.5	55.4	-1.6	358	-0.2	8.7	-0.8	8.8	8.8	$\Delta H^*_{CIELAB} = 4.1$					
M	22	48.6	61.6	-1.2	359	48.6	61.6	-1.2	359	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 4.3$					
Mean colour reproduction index:									$R^*_{ab,m} = 77$											


YE320-3N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

T	i	LAB*a,ref			hab,ref			LAB*a,out			hab,out			LAB*a,out/c-ref			ΔH^*	ΔE^*	Start output S1			
N	1	29.3	1.6	0.7	24	29.3	1.6	0.7	24	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Specification according to			
	2	30.5	5.3	0.4	4	30.3	6.1	-0.1	358	0.0	0.8	-0.5	1.0	1.0					ISO/IEC 15775 Annex G			
	3	31.6	9.1	0.0	0	30.4	10.9	-1.4	352	-1.0	1.8	-1.4	2.4	2.6					and DIN 33866-1 Annex G			
	4	32.7	12.8	-0.2	359	31.4	16.4	-1.7	354	-1.2	3.6	-1.4	3.9	4.1					relative CIELAB data used for "out"			
	5	33.8	16.5	-0.6	358	31.9	21.5	-1.8	355	-1.8	5.0	-1.1	5.1	5.5					$\Delta L^* = 47.2 - 29.34$			
	6	34.9	20.2	-0.9	357	33.0	24.9	-1.2	357	-1.8	4.7	-0.2	4.7	5.1					Regularity			
	7	36.0	24.0	-1.3	357	33.9	29.6	-1.0	358	-2.0	5.6	0.3	5.7	6.0					$g^* = 40.0$			
	8	37.2	27.7	-1.6	356	35.1	33.7	-1.4	357	-2.0	6.0	0.2	6.0	6.4					Lightness gamut relative to offset			
	9	38.3	31.4	-2.0	356	35.9	37.8	-1.7	357	-2.2	6.4	0.3	6.4	6.8					$f^* = 23.1$			
	10	39.4	35.1	-2.3	356	38.4	43.2	-2.7	356	-0.9	8.1	-0.3	8.1	8.1					Black – Magenta red			
	11	40.5	38.9	-2.6	356	39.8	47.9	-4.1	355	-0.6	9.1	-1.4	9.2	9.2					cmy0: N – M			
	12	41.6	42.6	-3.0	356	41.6	50.9	-5.2	354	0.0	8.3	-2.1	8.6	8.6					Mean CIELAB difference (17 steps)			
	13	42.7	46.3	-3.3	356	42.3	55.1	-4.7	355	-0.4	8.8	-1.3	8.9	8.9					$\Delta H^*_{CIELAB} = 5.0$			
	14	43.9	50.0	-3.7	356	43.2	57.5	-4.8	355	-0.6	7.5	-1.0	7.6	7.6					$\Delta E^*_{CIELAB} = 5.2$			
	15	45.0	53.8	-4.0	356	44.7	58.6	-4.8	355	-0.2	4.8	-0.7	4.9	4.9					Mean CIELAB difference (5 steps)			
	16	46.1	57.5	-4.4	356	45.5	60.1	-5.5	355	-0.5	2.6	-1.0	2.9	2.9					$\Delta H^*_{CIELAB} = 4.1$			
	M	17	47.2	61.2	-4.7	356	47.2	61.2	-4.7	356	0.0	0.0	0.0	0.0	0.0					$\Delta E^*_{CIELAB} = 4.2$		
N	18	29.3	1.6	0.7	24	29.3	1.6	0.7	24	0.0	0.0	0.0	0.0	0.0					Mean colour reproduction index: $R^*_{ab,m} = 77$			
	19	33.8	16.5	-0.6	358	31.9	21.5	-1.8	355	-1.8	5.0	-1.1	5.1	5.5								
	20	38.3	31.4	-2.0	356	35.9	37.8	-1.7	357	-2.2	6.4	0.3	6.4	6.8								
M	21	42.7	46.3	-3.3	356	42.3	55.1	-4.7	355	-0.4	8.8	-1.3	8.9	8.9								
	22	47.2	61.2	-4.7	356	47.2	61.2	-4.7	356	0.0	0.0	0.0	0.0	0.0								

YE321-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

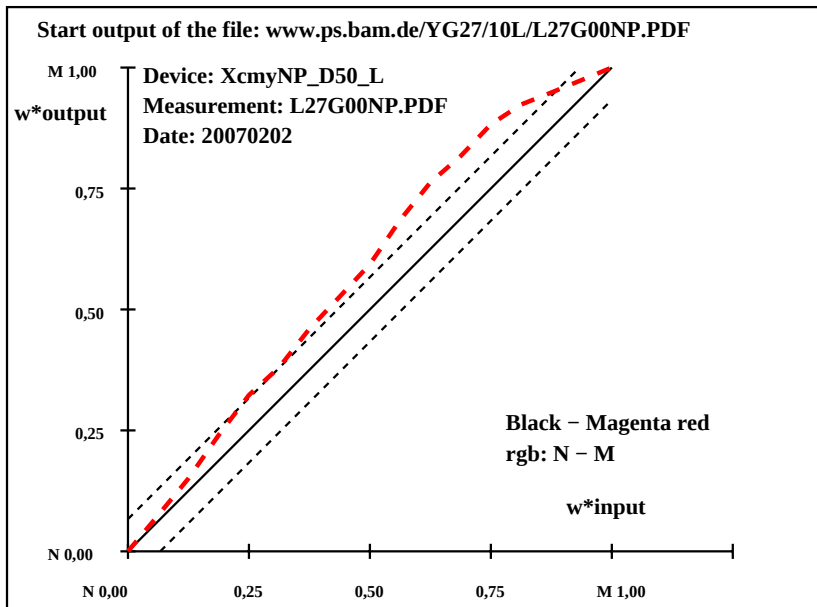

YE320-7N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

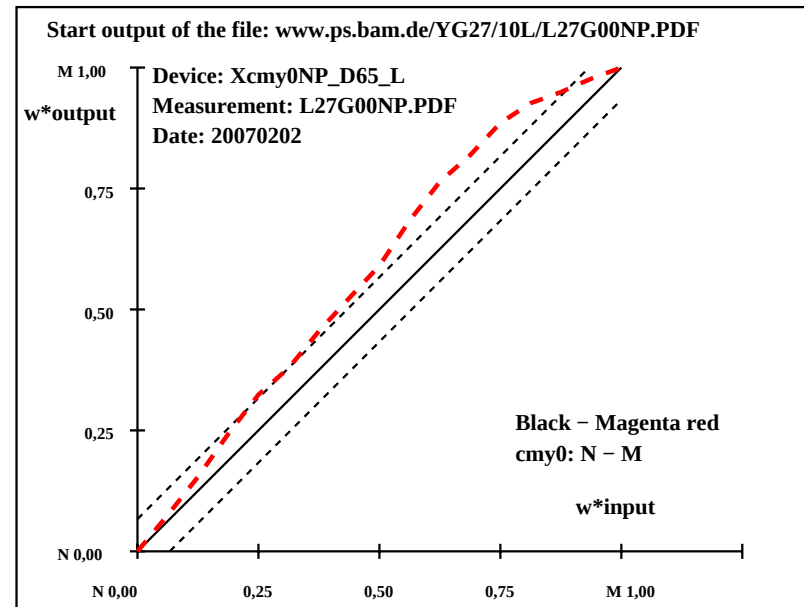

YE321-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202