

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	91.5	-10.1	109.3	95	91.5	-10.1	109.3	95
	2	86.8	-8.7	96.5	95	83.6	-8.3	91.3	95
	3	82.1	-7.3	83.7	95	80.1	-8.2	81.8	96
	4	77.3	-5.9	70.9	95	75.6	-6.3	66.3	96
	5	72.6	-4.6	58.1	95	70.9	-4.4	50.6	95
	6	67.8	-3.2	45.2	94	66.0	-2.8	36.1	95
	7	63.1	-1.8	32.4	93	62.0	-1.0	25.3	92
	8	58.4	-0.4	19.6	91	57.9	0.0	14.7	90
Z	9	53.6	0.9	6.8	82	53.6	0.9	6.8	82
	10	50.2	2.4	1.5	32	49.0	2.3	-0.8	339
	11	46.7	3.8	-3.8	315	45.1	5.4	-9.4	300
	12	43.3	5.3	-9.1	300	40.7	6.4	-17.9	290
	13	39.8	6.8	-14.5	295	36.8	8.5	-23.1	290
	14	36.3	8.2	-19.8	292	33.3	9.0	-27.8	288
	15	32.9	9.7	-25.1	291	31.2	10.5	-30.5	289
	16	29.4	11.1	-30.5	290	28.1	11.8	-33.2	290
V	17	26.0	12.6	-35.8	289	26.0	12.6	-35.8	289
Y	18	91.5	-10.1	109.3	95	91.5	-10.1	109.3	95
	19	72.6	-4.6	58.1	95	70.9	-4.4	50.6	95
Z	20	53.6	0.9	6.8	82	53.6	0.9	6.8	82
	21	39.8	6.8	-14.5	295	36.8	8.5	-23.1	290
V	22	26.0	12.6	-35.8	289	26.0	12.6	-35.8	289

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Regularity
 $g^* = 52.3$

Yellow - Violet blue
rgb: Y - Z - V

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 4.9$
 $\Delta E^*_{CIELAB} = 5.2$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 3.3$
 $\Delta E^*_{CIELAB} = 3.4$

YE320-3N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
Y	1	90.9	-17.3	110.7	99	90.9	-17.3	110.7	99
	2	86.3	-15.2	97.7	99	83.1	-15.0	92.3	99
	3	81.6	-13.1	84.7	99	79.6	-14.6	82.6	100
	4	77.0	-11.0	71.7	99	75.2	-12.1	66.7	100
	5	72.3	-8.9	58.8	99	70.5	-9.4	50.7	101
	6	67.6	-6.7	45.8	98	65.8	-6.8	36.1	101
	7	63.0	-4.6	32.8	98	61.8	-4.2	25.2	100
	8	58.3	-2.5	19.8	98	57.8	-2.1	14.7	99
Z	9	53.7	-0.4	6.8	94	53.7	-0.4	6.8	94
	10	50.3	1.9	1.5	38	49.1	1.8	-0.8	333
	11	46.9	4.4	-3.7	319	45.3	6.0	-9.4	302
	12	43.5	6.8	-9.0	307	41.0	8.4	-17.8	295
	13	40.1	9.3	-14.3	303	37.2	11.5	-22.9	297
	14	36.8	11.7	-19.5	301	33.8	13.1	-27.4	295
	15	33.4	14.1	-24.8	300	31.7	15.3	-30.2	297
	16	30.0	16.6	-30.1	299	28.7	17.4	-32.9	298
V	17	26.6	19.0	-35.4	298	26.6	19.0	-35.4	298
Y	18	90.9	-17.3	110.7	99	90.9	-17.3	110.7	99
	19	72.3	-8.9	58.8	99	70.5	-9.4	50.7	101
Z	20	53.7	-0.4	6.8	94	53.7	-0.4	6.8	94
	21	40.1	9.3	-14.3	303	37.2	11.5	-22.9	297
V	22	26.6	19.0	-35.4	298	26.6	19.0	-35.4	298

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Regularity
 $g^* = 51.7$

Yellow - Violet blue
cmy0: Y - Z - V


Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 5.1$
 $\Delta E^*_{CIELAB} = 5.4$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 3.4$
 $\Delta E^*_{CIELAB} = 3.5$

YE321-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

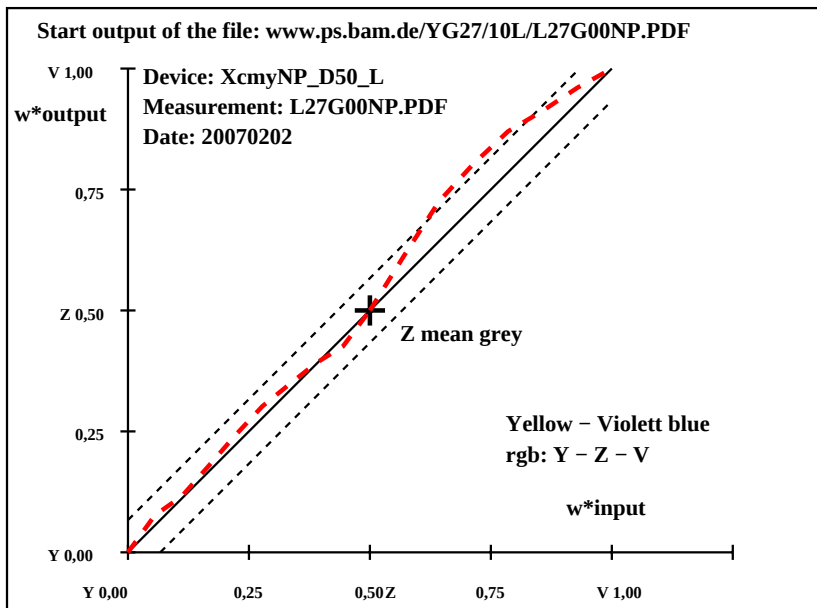

YE320-7N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

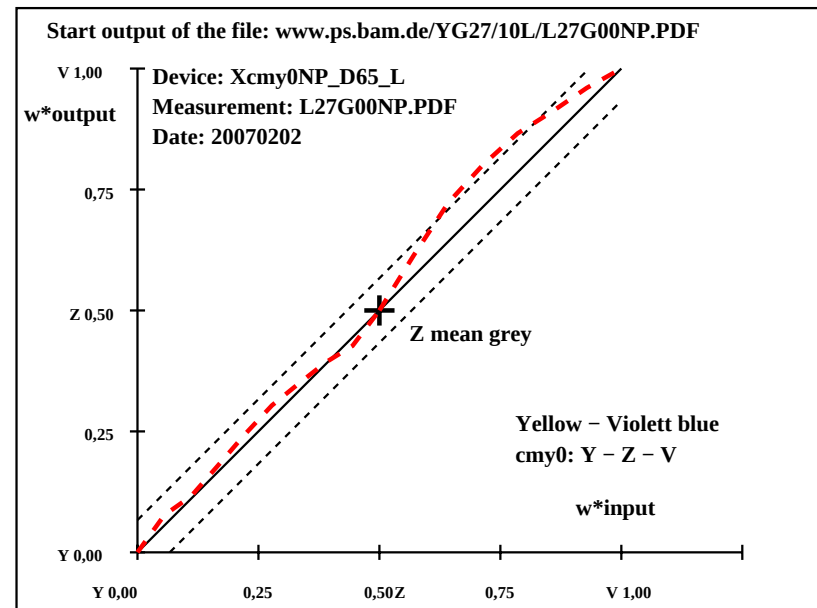

YE321-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202