

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
L	1	50.7	-58.6	31.2	152	50.7	-58.6	31.2	152
	2	51.0	-51.3	28.1	151	52.4	-50.2	26.1	153
	3	51.4	-44.1	24.9	151	52.7	-42.5	21.1	154
	4	51.7	-36.8	21.8	149	53.3	-36.6	17.3	155
	5	52.1	-29.6	18.6	148	52.8	-30.2	15.2	153
	6	52.4	-22.3	15.5	145	52.7	-24.2	12.9	152
	7	52.8	-15.0	12.3	141	53.0	-17.4	10.5	149
	8	53.1	-7.8	9.2	131	53.6	-9.5	8.5	138
Z	9	53.5	-0.5	6.0	96	53.5	-0.5	6.0	96
	10	52.8	7.2	5.1	36	53.5	8.9	4.3	26
	11	52.1	14.9	4.2	16	53.0	19.6	2.7	8
	12	51.5	22.7	3.3	8	53.8	28.5	0.2	0
	13	50.8	30.5	2.5	5	52.3	37.8	-1.6	357
	14	50.2	38.2	1.6	2	51.4	44.2	-1.2	358
	15	49.5	46.0	0.7	1	50.0	50.0	-2.3	357
	16	48.8	53.7	-0.1	360	49.1	55.8	-2.5	357
M	17	48.2	61.5	-1.0	359	48.2	61.5	-1.0	359
L	18	50.7	-58.6	31.2	152	50.7	-58.6	31.2	152
	19	52.1	-29.6	18.6	148	52.8	-30.2	15.2	153
Z	20	53.5	-0.5	6.0	96	53.5	-0.5	6.0	96
	21	50.8	30.5	2.5	5	52.3	37.8	-1.6	357
M	22	48.2	61.5	-1.0	359	48.2	61.5	-1.0	359

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G

Regularity
 $g^* = 16.7$

Leaf green - Magenta red
rgb: L - Z - M

Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 3.5$
 $\Delta E^*_{CIELAB} = 3.6$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.4$
 $\Delta E^*_{CIELAB} = 2.4$

YE320-3N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	
L	1	51.5	-61.7	33.8	151	51.5	-61.7	33.8	151
	2	51.7	-54.2	30.3	151	53.1	-52.9	28.3	152
	3	52.0	-46.7	26.9	150	53.4	-44.7	23.0	153
	4	52.2	-39.2	23.4	149	53.9	-38.4	19.0	154
	5	52.5	-31.8	20.0	148	53.3	-31.9	16.6	153
	6	52.8	-24.3	16.5	146	53.1	-25.8	14.0	152
	7	53.0	-16.8	13.0	142	53.3	-18.8	11.3	149
	8	53.3	-9.3	9.6	134	53.8	-10.9	9.0	141
Z	9	53.5	-1.8	6.1	107	53.5	-1.8	6.1	107
	10	52.7	6.0	4.8	39	53.3	7.6	3.9	27
	11	51.8	13.9	3.4	14	52.7	18.3	1.8	6
	12	51.0	21.7	2.1	5	53.3	27.5	-1.0	358
	13	50.2	29.6	0.8	1	51.5	37.1	-3.6	354
	14	49.3	37.5	-0.5	359	50.5	43.4	-3.5	355
	15	48.5	45.4	-1.8	358	48.9	49.5	-5.0	354
	16	47.6	53.2	-3.2	356	47.9	55.4	-5.6	354
M	17	46.8	61.1	-4.5	356	46.8	61.1	-4.5	356
L	18	51.5	-61.7	33.8	151	51.5	-61.7	33.8	151
	19	52.5	-31.8	20.0	148	53.3	-31.9	16.6	153
Z	20	53.5	-1.8	6.1	107	53.5	-1.8	6.1	107
	21	50.2	29.6	0.8	1	51.5	37.1	-3.6	354
M	22	46.8	61.1	-4.5	356	46.8	61.1	-4.5	356

Start output S1
Specification according to
ISO/IEC 15775 Annex G
and DIN 33866-1 Annex G


Regularity
 $g^* = 4.8$

Leaf green - Magenta red
cmy0: L - Z - M


Mean CIELAB difference (17 steps)
 $\Delta H^*_{CIELAB} = 3.5$
 $\Delta E^*_{CIELAB} = 3.6$

Mean CIELAB difference (5 steps)
 $\Delta H^*_{CIELAB} = 2.4$
 $\Delta E^*_{CIELAB} = 2.5$

YE321-3N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202

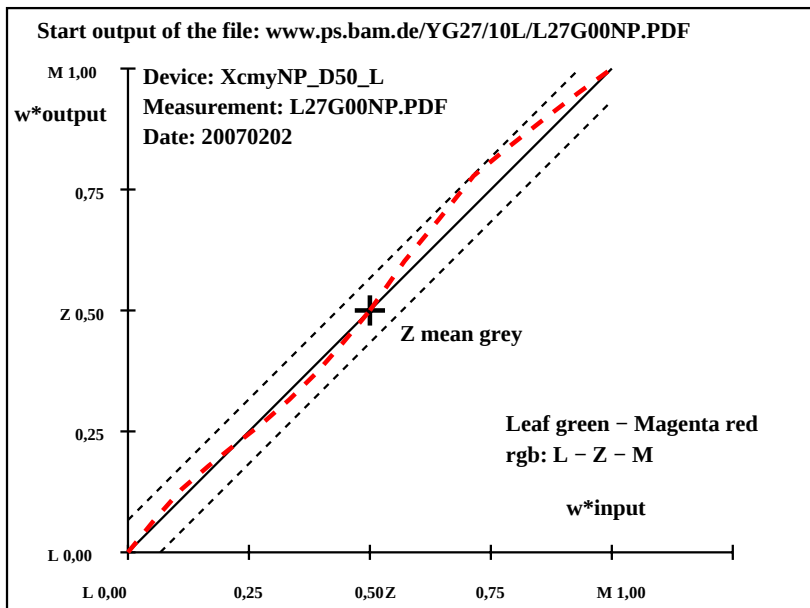

YE320-7N, ; Device: XcmyNP_D50_L; Measurement: L27G00NP.PDF; Date: 20070202

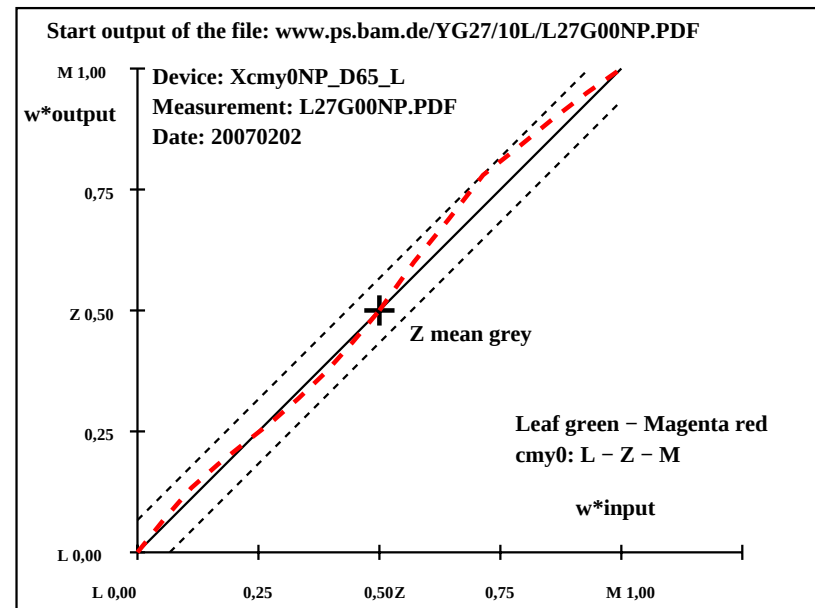

YE321-7N, ; Device: Xcmy0NP_D65_L; Measurement: L27G00NP.PDF; Date: 20070202