


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*								
O	1	35.9	60.7	44.5	36	35.9	60.7	44.5	36	0.0	0.0	0.0	0.0	0.0	Start-Ausgabe S1	
	2	39.5	56.9	41.7	36	40.2	58.0	36.9	32	0.7	1.1	-4.7	4.9	5.0	Kennzeichnung nach	
	3	43.0	53.1	39.0	36	45.1	53.5	29.9	29	2.1	0.4	-9.0	9.1	9.3	ISO/IEC 15775 Anhang G	
	4	46.6	49.3	36.2	36	49.9	48.2	26.2	29	3.3	-1.0	-9.9	10.0	10.6	und DIN 33866-1 Anhang G	
	5	50.1	45.5	33.4	36	54.4	43.2	21.4	26	4.3	-2.2	-11.9	12.2	12.9	relative CIELAB Daten für "aus"	
	6	53.7	41.7	30.6	36	58.0	38.5	20.0	27	4.3	-3.1	-10.5	11.1	11.9	$\Delta L^* = 92.71 - 35.94$	
	7	57.2	37.9	27.9	36	61.6	34.7	16.8	26	4.3	-3.1	-10.9	11.5	12.3	Gleichmäßigkeit	
	8	60.8	34.1	25.1	36	65.9	29.7	14.8	26	5.1	-4.3	-10.2	11.2	12.3	$g^* = 41.7$	
	9	64.3	30.3	22.3	36	69.8	25.4	12.6	26	5.4	-4.8	-9.6	10.9	12.2	Helligkeitsumfang relativ zu Offset	
	10	67.9	26.5	19.5	36	73.7	21.2	10.2	26	5.8	-5.2	-9.2	10.7	12.2	$f^* = 73.3$	
	11	71.4	22.7	16.8	36	77.6	17.1	7.5	24	6.2	-5.5	-9.2	10.8	12.4	Orangerot – Weiß	
	12	75.0	18.9	14.0	36	81.3	13.1	5.2	22	6.4	-5.7	-8.7	10.5	12.3	rgb: O – W	
	13	78.5	15.1	11.2	37	85.0	8.9	3.2	20	6.5	-6.1	-7.9	10.1	12.0	Mittlerer CIELAB-Abstand (17 Stufen)	
	14	82.1	11.3	8.4	37	88.7	4.5	2.1	25	6.7	-6.7	-6.2	9.3	11.4	$\Delta H^{*CIELAB} = 8.6$	
	15	85.6	7.5	5.6	37	92.1	0.0	1.5	90	6.5	-7.4	-4.0	8.6	10.7	$\Delta E^{*CIELAB} = 9.6$	
	16	89.2	3.7	2.9	38	92.6	0.0	0.1	90	3.4	-3.6	-2.7	4.6	5.8	Mittlerer Farbwiedergabe-Index:	
W	17	92.7	0.0	0.1	135	92.7	0.0	0.1	135	0.0	0.0	0.0	0.0	0.0	$R^{*}_{ab,m} = 58$	
O	18	35.9	60.7	44.5	36	35.9	60.7	44.5	36	0.0	0.0	0.0	0.0	0.0		
	19	50.1	45.5	33.4	36	54.4	43.2	21.4	26	4.3	-2.2	-11.9	12.2	12.9		
	20	64.3	30.3	22.3	36	69.8	25.4	12.6	26	5.4	-4.8	-9.6	10.9	12.2	Mittlerer CIELAB-Abstand (5 Stufen)	
	21	78.5	15.1	11.2	37	85.0	8.9	3.2	20	6.5	-6.1	-7.9	10.1	12.0	$\Delta H^{*CIELAB} = 6.6$	
W	22	92.7	0.0	0.1	135	92.7	0.0	0.1	135	0.0	0.0	0.0	0.0	0.0	$\Delta E^{*CIELAB} = 7.4$	


YG300-3N, Gerät: FrgbNP_D65_L; Messung: L26G00NA.PDF; Datum: 20070129

T	i	LAB*a,ref				hab,ref				LAB*a,out				hab,out				LAB*a,out/c-ref				ΔH^*	ΔE^*	
O	1	46.3	60.0	40.4	34	46.3	60.0	40.4	34	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Start-Ausgabe S1		
	2	49.4	56.3	37.9	34	46.3	60.2	39.3	33	-3.0	4.0	1.4	4.2	5.2								Kennzeichnung nach		
	3	52.4	52.5	35.4	34	46.2	60.6	37.3	32	-6.2	8.1	1.9	8.3	10.4								ISO/IEC 15775 Anhang G		
	4	55.5	48.8	32.8	34	47.1	60.0	34.0	30	-8.3	11.3	1.2	11.3	14.1								und DIN 33866-1 Anhang G		
	5	58.6	45.0	30.3	34	48.6	58.4	30.4	27	-9.9	13.4	0.1	13.4	16.7								relative CIELAB Daten für "aus"		
	6	61.7	41.3	27.8	34	50.7	55.6	26.0	25	-10.8	14.3	-1.7	14.5	18.1								$\Delta L^* = 95.41 - 46.31$		
	7	64.7	37.5	25.3	34	53.3	51.8	22.8	24	-11.3	14.3	-2.4	14.5	18.5								Gleichmäßigkeit		
	8	67.8	33.8	22.7	34	56.9	46.7	20.7	24	-10.8	13.0	-1.9	13.1	17.1								$g^* = 11.8$		
	9	70.9	30.0	20.2	34	60.7	41.1	18.9	25	-10.1	11.1	-1.2	11.2	15.1								Helligkeitsumfang relativ zu Offset		
	10	73.9	26.3	17.7	34	64.9	34.8	17.4	27	-8.9	8.5	-0.2	8.6	12.4								$f^* = 63.4$		
	11	77.0	22.5	15.2	34	70.6	27.0	14.4	28	-6.3	4.5	-0.7	4.6	7.9										
	12	80.1	18.8	12.6	34	75.6	21.2	10.6	27	-4.4	2.5	-1.9	3.2	5.5								Orangerot – Weiß		
	13	83.1	15.0	10.1	34	80.1	15.9	8.3	28	-2.9	0.9	-1.7	2.0	3.6								rgb: O – W		
	14	86.2	11.3	7.6	34	84.1	11.4	6.3	29	-2.0	0.1	-1.2	1.3	2.4										
	15	89.3	7.5	5.0	34	88.4	6.7	4.0	31	-0.8	-0.7	-0.9	1.3	1.6								Mittlerer CIELAB-Abstand (17 Stufen)		
	16	92.3	3.8	2.5	34	90.0	3.2	1.9	31	-2.3	-0.4	-0.5	0.8	2.5								$\Delta H^{*CIELAB} = 6.6$		
W	17	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0								$\Delta E^{*CIELAB} = 8.9$		
O	18	46.3	60.0	40.4	34	46.3	60.0	40.4	34	0.0	0.0	0.0	0.0	0.0										
	19	58.6	45.0	30.3	34	48.6	58.4	30.4	27	-9.9	13.4	0.1	13.4	16.7										
	20	70.9	30.0	20.2	34	60.7	41.1	18.9	25	-10.1	11.1	-1.2	11.2	15.1								Mittlerer CIELAB-Abstand (5 Stufen)		
	21	83.1	15.0	10.1	34	80.1	15.9	8.3	28	-2.9	0.9	-1.7	2.0	3.6								$\Delta H^{*CIELAB} = 5.3$		
W	22	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0								$\Delta E^{*CIELAB} = 7.1$		
																						Mittlerer Farbwiedergabe-Index:	$R^{*}_{ab,m} = 61$	

YG301-3N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

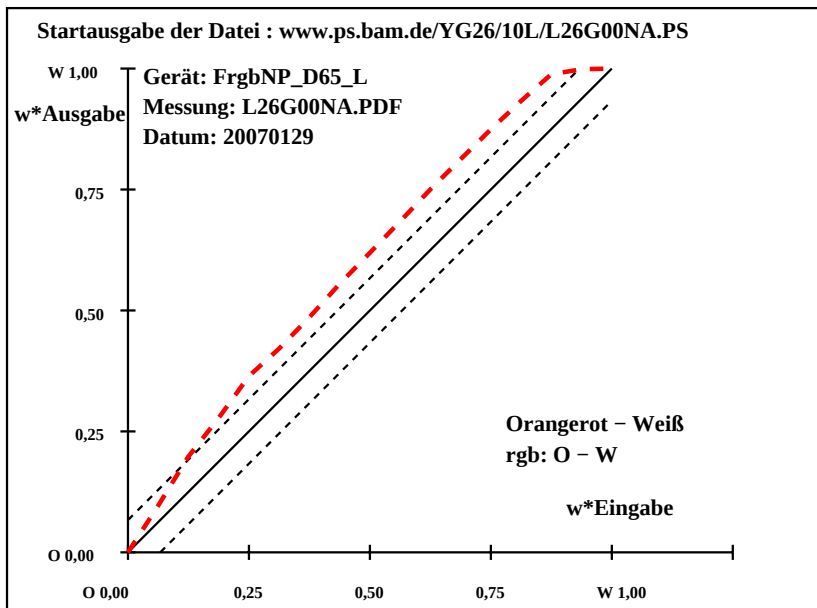

YG300-7N, Gerät: FrgbNP_D65_L; Messung: L26G00NA.PDF; Datum: 20070129

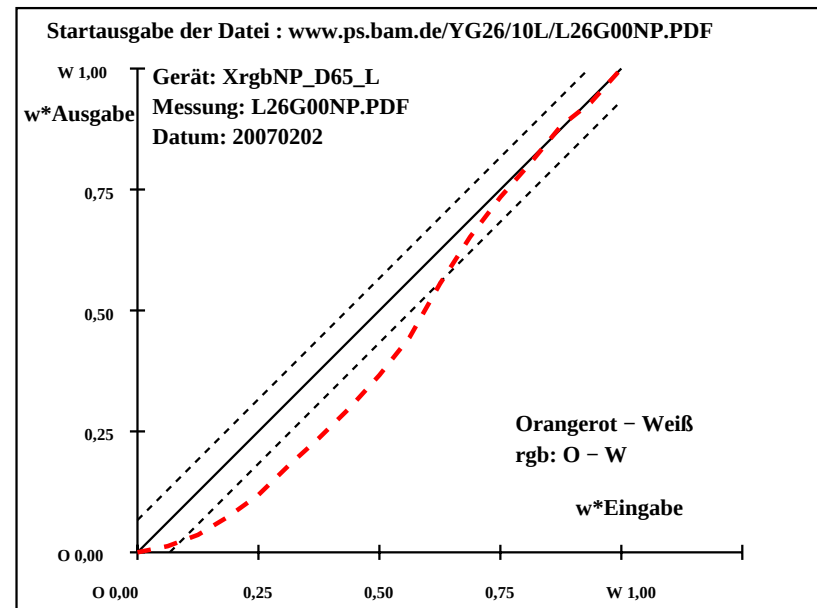

YG301-7N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202