


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start-Ausgabe S1						
N	1	8.3	0.1	-0.1	297	8.3	0.1	-0.1	297	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach
	2	10.0	3.9	2.6	34	9.7	3.9	1.8	25	-0.3	0.0	-0.7	0.8	0.9	ISO/IEC 15775 Anhang G
	3	11.7	7.7	5.4	35	11.3	8.2	4.5	29	-0.3	0.5	-0.8	1.0	1.1	und DIN 33866-1 Anhang G
	4	13.4	11.5	8.2	35	13.0	12.5	7.3	30	-0.3	1.0	-0.8	1.3	1.4	relative CIELAB Daten für "aus"
	5	15.0	15.3	11.0	36	14.9	17.1	10.2	31	-0.1	1.8	-0.7	2.0	2.0	$\Delta L^* = 35.11 - 8.34$
	6	16.7	19.1	13.8	36	16.6	21.7	13.2	31	0.0	2.6	-0.5	2.7	2.7	Gleichmäßigkeit
	7	18.4	22.9	16.6	36	18.4	26.0	16.1	32	0.0	3.1	-0.4	3.1	3.1	$g^* = 28.8$
	8	20.1	26.7	19.4	36	20.5	30.2	19.4	33	0.4	3.5	0.0	3.5	3.5	
	9	21.7	30.5	22.2	36	22.4	34.9	23.0	33	0.7	4.4	0.8	4.5	4.5	Helligkeitsumfang relativ zu Offset
	10	23.4	34.3	25.0	36	25.1	39.2	26.1	34	1.7	4.9	1.1	5.0	5.3	$f^* = 34.6$
O	11	25.1	38.1	27.8	36	27.3	44.2	30.5	35	2.2	6.1	2.7	6.7	7.0	
	12	26.7	41.9	30.6	36	29.8	49.1	34.6	35	3.1	7.2	4.0	8.2	8.8	Schwarz – Orangerot
	13	28.4	45.7	33.4	36	32.3	54.6	39.7	36	3.9	8.9	6.3	10.9	11.6	rgb: N – O
	14	30.1	49.5	36.2	36	34.0	58.1	42.7	36	3.9	8.6	6.5	10.8	11.5	
	15	31.8	53.3	39.0	36	35.1	60.5	44.7	36	3.4	7.2	5.7	9.2	9.8	Mittlerer CIELAB-Abstand (17 Stufen)
	16	33.4	57.1	41.8	36	35.2	60.7	44.7	36	1.7	3.6	2.9	4.6	4.9	$\Delta H^*_{CIELAB} = 4.4$
	17	35.1	60.9	44.6	36	35.1	60.9	44.6	36	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 4.6$
	18	8.3	0.1	-0.1	297	8.3	0.1	-0.1	297	0.0	0.0	0.0	0.0	0.0	
	19	15.0	15.3	11.0	36	14.9	17.1	10.2	31	-0.1	1.8	-0.7	2.0	2.0	
	20	21.7	30.5	22.2	36	22.4	34.9	23.0	33	0.7	4.4	0.8	4.5	4.5	Mittlerer CIELAB-Abstand (5 Stufen)
O	21	28.4	45.7	33.4	36	32.3	54.6	39.7	36	3.9	8.9	6.3	10.9	11.6	$\Delta H^*_{CIELAB} = 3.5$
	22	35.1	60.9	44.6	36	35.1	60.9	44.6	36	0.0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 3.6$
Mittlerer Farbwiedergabe-Index:										$R^*_{ab,m} = 80$					


YG300–3N, Gerät: FrgbNP_D65_L; Messung: L26G00NA.PDF; Datum: 20070129

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH^*	ΔE^*	Start-Ausgabe S1					
N	1	22.0	0.0	0.0	0	22.0	0.0	0.0	0	0.0	0.0	0.0	0.0	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G
	2	23.5	3.8	2.4	32	21.6	2.1	-0.4	347	-1.9	-1.6	-2.8	3.3	relative CIELAB Daten für "aus"
	3	25.1	7.6	4.7	32	21.6	4.8	0.7	8	-3.3	-2.7	-3.9	4.9	$\Delta L^* = 46.32 - 22.02$
	4	26.6	11.3	7.1	32	23.6	8.5	4.2	26	-2.9	-2.7	-2.8	4.1	Gleichmäßigkeit
	5	28.1	15.1	9.5	32	26.4	13.3	9.9	37	-1.6	-1.7	0.4	1.9	$g^* = 44.0$
	6	29.6	18.9	11.8	32	30.4	16.7	18.0	47	0.8	-2.1	6.2	6.6	Helligkeitsumfang relativ zu Offset
	7	31.1	22.7	14.2	32	33.1	22.8	23.4	46	1.9	0.1	9.2	9.2	
	8	32.7	26.5	16.5	32	34.7	28.2	27.1	44	2.0	1.7	10.6	10.7	
	9	34.2	30.3	18.9	32	36.4	33.4	29.7	42	2.2	3.2	10.8	11.3	$f^* = 31.4$
	10	35.7	34.0	21.3	32	37.5	37.3	32.0	41	1.8	3.3	10.7	11.2	Schwarz – Orangerot rgb: N – O
	11	37.2	37.8	23.6	32	38.7	41.6	34.0	39	1.5	3.8	10.4	11.0	
	12	38.7	41.6	26.0	32	39.9	44.7	35.5	38	1.2	3.1	9.5	10.0	
	13	40.2	45.4	28.4	32	41.4	48.6	36.7	37	1.2	3.2	8.4	9.0	Mittlerer CIELAB-Abstand (17 Stufen)
	14	41.8	49.2	30.7	32	42.9	52.1	38.2	36	1.2	2.9	7.5	8.0	
	15	43.3	52.9	33.1	32	44.3	54.9	38.0	35	1.0	2.0	4.9	5.3	
	16	44.8	56.7	35.4	32	45.6	58.3	38.1	33	0.8	1.6	2.7	3.1	
	O	17	46.3	60.5	37.8	32	46.3	60.5	37.8	32	0.0	0.0	0.0	0.0
18		22.0	0.0	0.0	0	22.0	0.0	0.0	0	0.0	0.0	0.0	0.0	$\Delta E^*_{CIELAB} = 6.7$
N	19	28.1	15.1	9.5	32	26.4	13.3	9.9	37	-1.6	-1.7	0.4	1.9	Mittlerer CIELAB-Abstand (5 Stufen)
	20	34.2	30.3	18.9	32	36.4	33.4	29.7	42	2.2	3.2	10.8	11.3	
	21	40.2	45.4	28.4	32	41.4	48.6	36.7	37	1.2	3.2	8.4	9.0	
O	22	46.3	60.5	37.8	32	46.3	60.5	37.8	32	0.0	0.0	0.0	0.0	$\Delta H^*_{CIELAB} = 4.4$
														$\Delta E^*_{CIELAB} = 4.6$
Mittlerer Farbwiedergabe-Index:									$R^*_{ab,m} = 71$					

YG301–3N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

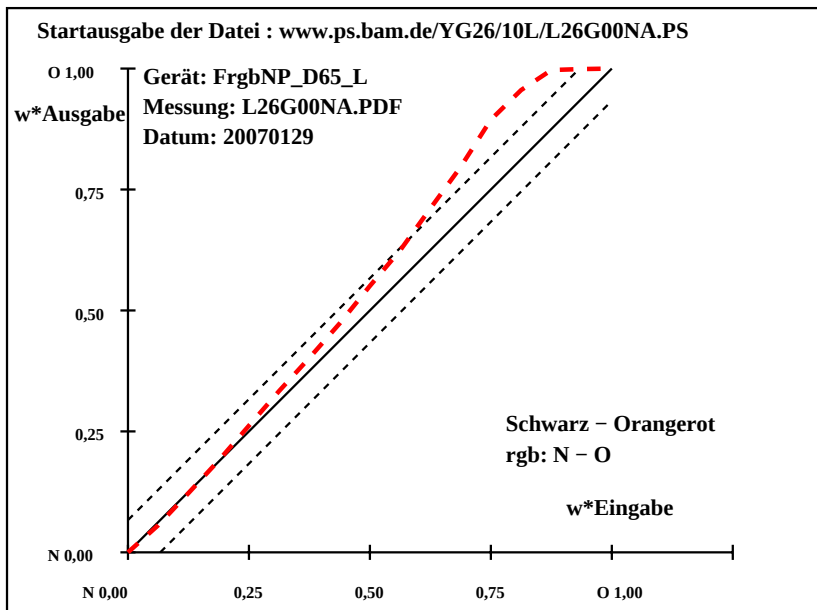

YG300–7N, Gerät: FrgbNP_D65_L; Messung: L26G00NA.PDF; Datum: 20070129

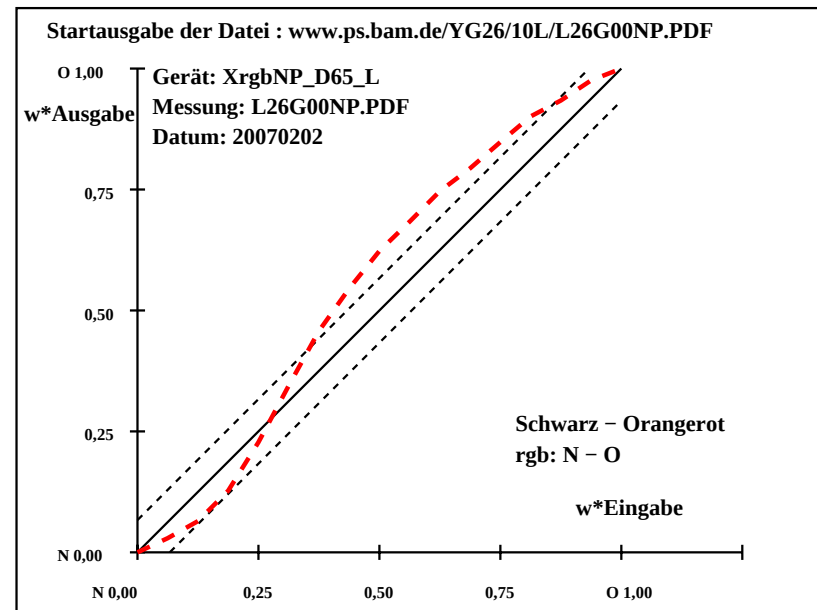

YG301–7N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202