


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH*	ΔE*	Start-Ausgabe S1						
L	1	45.7	-67.4	36.2	152	45.7	-67.4	36.2	152	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach
	2	48.8	-63.2	33.9	152	45.3	-66.7	36.0	152	-3.4	-3.4	2.1	4.1	5.4	ISO/IEC 15775 Anhang G
	3	51.9	-59.0	31.7	152	45.5	-66.5	36.6	151	-6.3	-7.4	4.9	9.0	11.1	und DIN 33866-1 Anhang G
	4	55.0	-54.7	29.4	152	45.6	-66.1	36.6	151	-9.4	-11.3	7.2	13.4	16.4	relative CIELAB Daten für "aus"
	5	58.2	-50.5	27.2	152	45.8	-65.0	37.3	150	-12.2	-14.4	10.1	17.7	21.5	ΔL* = 95.52 - 45.71
	6	61.3	-46.3	24.9	152	45.7	-65.3	37.2	150	-15.4	-18.9	12.3	22.6	27.4	Gleichmäßigkeit
	7	64.4	-42.1	22.7	152	47.4	-63.4	38.4	149	-16.9	-21.2	15.7	26.5	31.5	g* = 0.6
	8	67.5	-37.9	20.4	152	49.9	-60.0	38.8	147	-17.5	-22.0	18.4	28.8	33.7	Helligkeitsumfang relativ zu Offset
	9	70.6	-33.7	18.2	152	53.0	-55.8	36.0	147	-17.5	-22.1	17.9	28.4	33.4	f* = 64.4
	10	73.7	-29.4	15.9	152	57.2	-49.9	28.9	150	-16.4	-20.4	13.0	24.3	29.4	Laubgrün – Weiß
	11	76.8	-25.2	13.6	152	62.1	-42.0	22.3	152	-14.6	-16.7	8.7	18.9	24.0	rgb: L – W
	12	80.0	-21.0	11.4	152	67.6	-35.2	20.9	149	-12.3	-14.1	9.5	17.1	21.1	Mittlerer CIELAB-Abstand (17 Stufen)
	13	83.1	-16.8	9.1	152	74.0	-27.6	20.2	144	-8.9	-10.7	11.1	15.5	17.9	ΔH*CIELAB = 15.0
	14	86.2	-12.6	6.9	152	80.4	-21.0	19.7	137	-5.7	-8.3	12.8	15.4	16.4	ΔE*CIELAB = 17.9
	15	89.3	-8.3	4.6	151	85.8	-14.1	12.7	138	-3.4	-5.7	8.1	9.9	10.5	Mittlerer CIELAB-Abstand (5 Stufen)
	16	92.4	-4.1	2.4	151	90.6	-7.1	5.2	144	-1.7	-2.9	2.8	4.1	4.5	ΔH*CIELAB = 12.3
W	17	95.5	0.0	0.1	90	95.5	0.0	0.1	90	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 14.6
L	18	45.7	-67.4	36.2	152	45.7	-67.4	36.2	152	0.0	0.0	0.0	0.0	0.0	Mittlerer Farbwiedergabe-Index: R*ab,m = 21
	19	58.2	-50.5	27.2	152	45.8	-65.0	37.3	150	-12.2	-14.4	10.1	17.7	21.5	
	20	70.6	-33.7	18.2	152	53.0	-55.8	36.0	147	-17.5	-22.1	17.9	28.4	33.4	
	21	83.1	-16.8	9.1	152	74.0	-27.6	20.2	144	-8.9	-10.7	11.1	15.5	17.9	
W	22	95.5	0.0	0.1	90	95.5	0.0	0.1	90	0.0	0.0	0.0	0.0	0.0	


YG310-3N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH*	ΔE*	Start-Ausgabe S1						
L	1	48.9	-63.5	33.0	153	48.9	-63.5	33.0	153	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach
	2	51.8	-59.5	30.9	153	51.5	-57.8	30.8	152	-0.2	1.7	0.0	1.7	1.8	ISO/IEC 15775 Anhang G
	3	54.7	-55.6	28.9	153	54.0	-53.6	27.4	153	-0.7	1.9	-1.4	2.4	2.6	und DIN 33866-1 Anhang G
	4	57.6	-51.6	26.8	153	55.4	-47.5	21.0	156	-2.1	4.1	-5.7	7.1	7.4	relative CIELAB Daten für "aus"
	5	60.5	-47.6	24.8	153	58.2	-41.9	20.1	154	-2.3	5.7	-4.5	7.4	7.7	ΔL* = 95.38 – 48.9
	6	63.4	-43.6	22.7	153	60.1	-37.5	17.9	155	-3.2	6.1	-4.7	7.8	8.4	Gleichmäßigkeit
	7	66.3	-39.7	20.6	153	62.0	-32.4	17.6	152	-4.2	7.3	-2.9	7.9	9.0	g* = 62.1
	8	69.2	-35.7	18.6	153	64.5	-28.1	18.0	147	-4.6	7.6	-0.5	7.6	8.9	Helligkeitsumfang relativ zu Offset
	9	72.1	-31.7	16.5	153	67.2	-24.7	17.4	145	-4.8	7.0	0.9	7.1	8.6	f* = 60.1
	10	75.0	-27.7	14.4	153	70.0	-21.8	17.1	142	-5.0	5.9	2.7	6.5	8.3	
W	11	78.0	-23.7	12.4	153	73.1	-19.2	18.2	137	-4.8	4.5	5.8	7.4	8.9	
	12	80.9	-19.8	10.3	153	76.3	-16.9	14.1	140	-4.5	2.9	3.8	4.8	6.6	Laubgrün – Weiß
	13	83.8	-15.8	8.3	153	80.8	-15.3	12.0	142	-2.9	0.5	3.8	3.8	4.8	cmy0: L – W
	14	86.7	-11.8	6.2	153	84.3	-11.8	9.0	143	-2.3	0.0	2.8	2.8	3.7	
	15	89.6	-7.9	4.1	153	87.5	-8.7	6.7	143	-2.0	-0.7	2.6	2.7	3.4	Mittlerer CIELAB-Abstand (17 Stufen)
	16	92.5	-3.9	2.1	153	90.2	-5.0	2.0	159	-2.2	-1.0	0.0	1.1	2.6	ΔH*CIELAB = 4.6
	17	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 5.5
	18	48.9	-63.5	33.0	153	48.9	-63.5	33.0	153	0.0	0.0	0.0	0.0	0.0	
	19	60.5	-47.6	24.8	153	58.2	-41.9	20.1	154	-2.3	5.7	-4.5	7.4	7.7	
	20	72.1	-31.7	16.5	153	67.2	-24.7	17.4	145	-4.8	7.0	0.9	7.1	8.6	Mittlerer CIELAB-Abstand (5 Stufen)
W	21	83.8	-15.8	8.3	153	80.8	-15.3	12.0	142	-2.9	0.5	3.8	3.8	4.8	ΔH*CIELAB = 3.6
	22	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 4.2
Mittlerer Farbwiedergabe-Index:									R*ab,m = 76						

YG311-3N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202

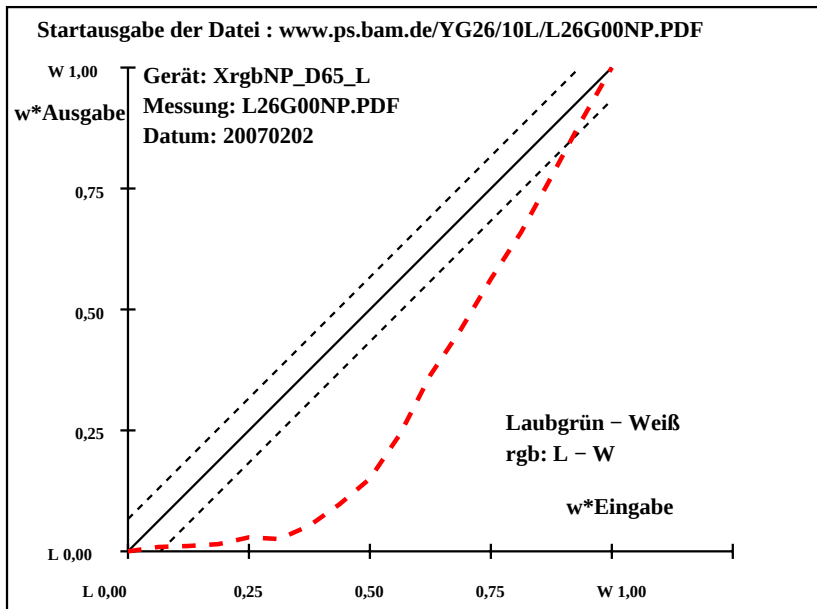

YG310-7N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

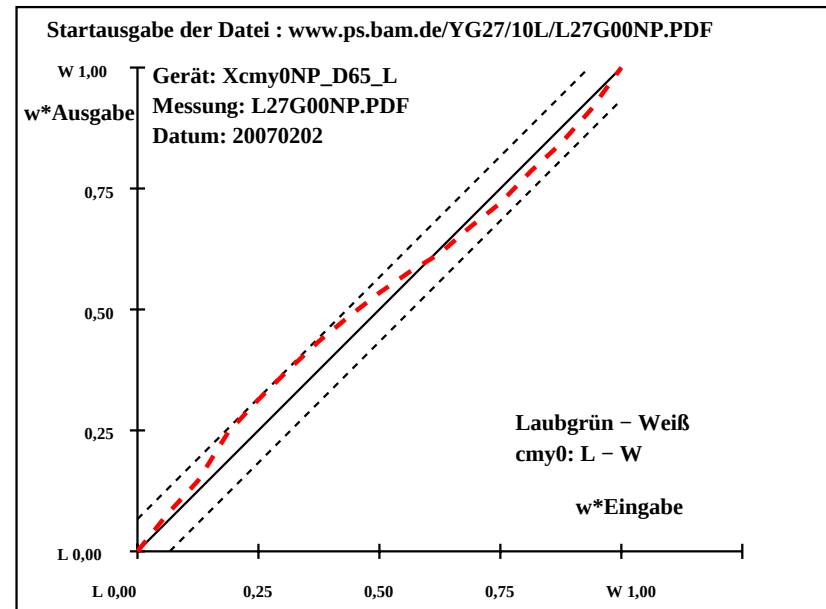

YG311-7N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202