


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start-Ausgabe S1								
N	1	20.4	0.0	-0.2	252	20.4	0.0	-0.2	252	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach	
	2	21.5	0.0	-3.3	270	19.5	-0.4	-4.6	264	-1.9	-0.4	-1.2	1.4	2.5	ISO/IEC 15775 Anhang G	
	3	22.7	0.1	-6.3	271	19.3	-0.4	-7.8	266	-3.3	-0.5	-1.4	1.6	3.8	und DIN 33866-1 Anhang G	
	4	23.8	0.1	-9.4	271	20.1	-0.8	-11.7	266	-3.6	-0.9	-2.2	2.5	4.5	relative CIELAB Daten für "aus"	
	5	25.0	0.2	-12.5	271	22.1	-1.1	-17.3	266	-2.8	-1.3	-4.7	5.1	5.8	ΔL* = 38.83 - 20.35	
	6	26.1	0.3	-15.5	271	24.3	-0.7	-22.8	268	-1.7	-1.0	-7.2	7.4	7.6	Gleichmäßigkeit	
	7	27.3	0.4	-18.6	271	25.7	0.2	-26.8	270	-1.5	-0.1	-8.1	8.2	8.4	g* = 28.9	
	8	28.4	0.5	-21.6	271	27.0	0.9	-29.9	272	-1.4	0.4	-8.2	8.3	8.4		
	9	29.6	0.6	-24.7	271	27.9	1.8	-33.0	273	-1.5	1.3	-8.2	8.4	8.6	Helligkeitsumfang relativ zu Offset	
	10	30.7	0.6	-27.8	271	29.2	2.7	-35.9	274	-1.5	2.1	-8.0	8.4	8.5	f* = 23.9	
	11	31.9	0.7	-30.8	271	31.0	3.8	-39.7	275	-0.8	3.1	-8.8	9.4	9.4		
N	12	33.1	0.8	-33.9	271	32.7	4.4	-42.9	276	-0.3	3.6	-8.9	9.7	9.7	Schwarz - Violetblau	
	13	34.2	0.9	-37.0	271	33.8	5.2	-45.4	277	-0.3	4.3	-8.4	9.5	9.5	rgb: N - V	
	14	35.4	1.0	-40.0	271	35.0	5.3	-47.3	276	-0.3	4.3	-7.2	8.5	8.5		
	15	36.5	1.0	-43.1	271	36.6	4.2	-48.9	275	0.1	3.2	-5.7	6.6	6.6	Mittlerer CIELAB-Abstand (17 Stufen)	
	16	37.7	1.1	-46.1	271	37.2	3.3	-49.1	274	-0.4	2.2	-2.9	3.7	3.7	ΔH*CIELAB = 5.8	
V	17	38.8	1.2	-49.2	271	38.8	1.2	-49.2	271	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 6.2	
N	18	20.4	0.0	-0.2	252	20.4	0.0	-0.2	252	0.0	0.0	0.0	0.0	0.0		
	19	25.0	0.2	-12.5	271	22.1	-1.1	-17.3	266	-2.8	-1.3	-4.7	5.1	5.8		
	20	29.6	0.6	-24.7	271	27.9	1.8	-33.0	273	-1.5	1.3	-8.2	8.4	8.6	Mittlerer CIELAB-Abstand (5 Stufen)	
	21	34.2	0.9	-37.0	271	33.8	5.2	-45.4	277	-0.3	4.3	-8.4	9.5	9.5	ΔH*CIELAB = 4.6	
V	22	38.8	1.2	-49.2	271	38.8	1.2	-49.2	271	0.0	0.0	0.0	0.0	0.0	ΔE*CIELAB = 4.8	
Mittlerer Farbwiedergabe-Index: R*ab,m = 73																


YG310-3N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH*	ΔE*	Start-Ausgabe S1						
N	1	28.9	2.7	0.4	8	28.9	2.7	0.4	8	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G relative CIELAB Daten für "aus" ΔL* = 26.19 – 28.92 Gleichmäßigkeit g* = 34.7
	2	28.7	3.7	-1.8	333	28.7	3.9	-1.8	334	0.0	0.2	0.0	0.2	0.2	
	3	28.6	4.8	-4.0	319	28.7	4.1	-4.6	311	0.1	-0.6	-0.5	0.9	0.9	
	4	28.4	5.8	-6.3	312	28.1	5.2	-6.2	310	-0.2	-0.5	0.1	0.6	0.7	
	5	28.2	6.8	-8.6	308	27.7	6.7	-8.5	308	-0.5	0.0	0.1	0.1	0.6	
	6	28.1	7.9	-10.8	306	27.0	7.3	-11.0	303	-1.0	-0.5	-0.1	0.6	1.2	
	7	27.9	8.9	-13.1	304	26.7	8.1	-12.6	303	-1.1	-0.7	0.5	0.9	1.5	
	8	27.7	9.9	-15.3	303	26.3	8.5	-15.4	299	-1.4	-1.3	0.0	1.4	2.0	
	9	27.6	11.0	-17.6	302	26.5	9.9	-17.8	299	-1.0	-1.0	-0.1	1.1	1.5	
	10	27.4	12.0	-19.9	301	26.2	11.1	-20.8	298	-1.1	-0.8	-0.8	1.3	1.8	
11	27.2	13.0	-22.1	300	25.9	12.5	-22.6	299	-1.2	-0.4	-0.4	0.7	1.5	Helligkeitsumfang relativ zu Offset f* = -3.4 Schwarz – Violetblau cmy0: N – V Mittlerer CIELAB-Abstand (17 Stufen) ΔH*CIELAB = 0.8 ΔE*CIELAB = 1.1	
12	27.0	14.0	-24.4	300	26.0	12.8	-25.1	297	-0.9	-1.1	-0.6	1.4	1.8		
13	26.9	15.1	-26.7	299	25.8	13.9	-27.1	297	-1.0	-1.1	-0.3	1.3	1.7		
14	26.7	16.1	-28.9	299	25.8	14.9	-29.4	297	-0.8	-1.1	-0.4	1.3	1.6		
15	26.5	17.1	-31.2	299	26.1	16.2	-31.5	297	-0.4	-0.8	-0.2	1.0	1.1		
16	26.4	18.2	-33.4	298	26.1	17.3	-33.0	298	-0.2	-0.8	0.4	1.0	1.0		
V	17	26.2	19.2	-35.7	298	26.2	19.2	-35.7	298	0.0	0.0	0.0	0.0		0.0
N	18	28.9	2.7	0.4	8	28.9	2.7	0.4	8	0.0	0.0	0.0	0.0		0.0
	19	28.2	6.8	-8.6	308	27.7	6.7	-8.5	308	-0.5	0.0	0.1	0.1		0.6
	20	27.6	11.0	-17.6	302	26.5	9.9	-17.8	299	-1.0	-1.0	-0.1	1.1		1.5
	21	26.9	15.1	-26.7	299	25.8	13.9	-27.1	297	-1.0	-1.1	-0.3	1.3	1.7	
V	22	26.2	19.2	-35.7	298	26.2	19.2	-35.7	298	0.0	0.0	0.0	0.0	0.0	
Mittlerer Farbwiedergabe-Index:										R*ab,m = 95					

YG311-3N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202

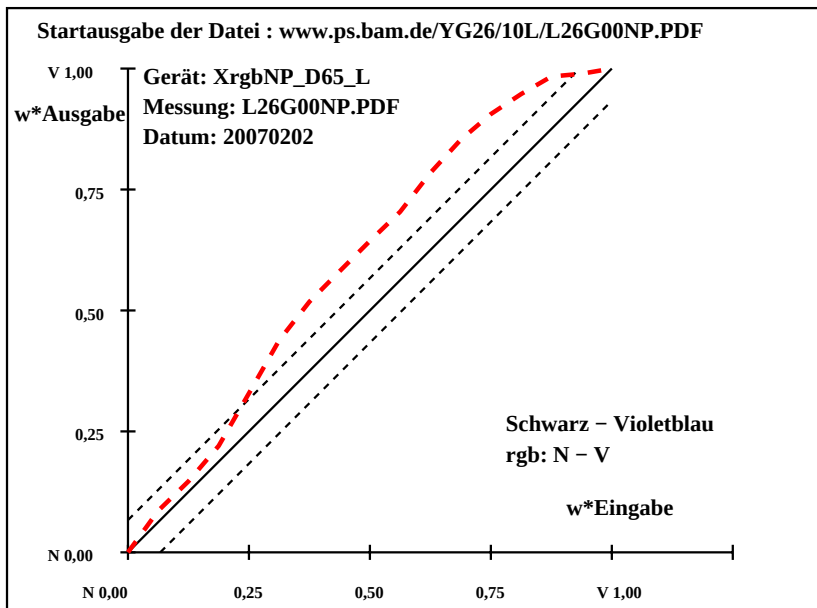

YG310-7N, Gerät: XrgbNP_D65_L; Messung: L26G00NP.PDF; Datum: 20070202

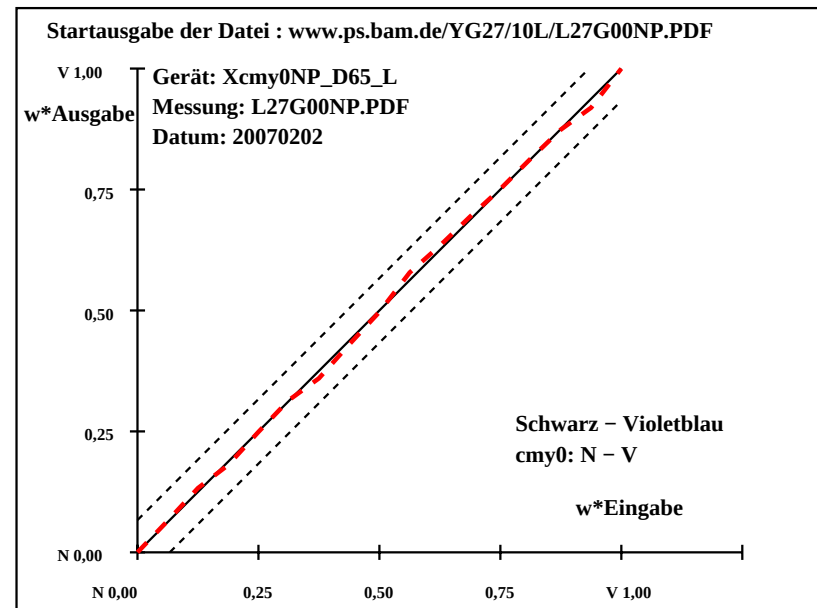

YG311-7N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202