


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start-Ausgabe S1							
L	1	48.1	-60.6	30.3	153	48.1	-60.6	30.3	153	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach ISO/IEC 15775 Anhang G und DIN 33866-1 Anhang G relative CIELAB Daten für "aus" ΔL* = 95.31 - 48.06 Gleichmäßigkeit g* = 63.5
	2	51.0	-56.8	28.4	153	50.8	-55.0	28.4	153	-0.2	1.8	0.0	1.8	1.8	
	3	54.0	-53.0	26.5	153	53.2	-51.0	25.2	154	-0.7	2.0	-1.2	2.4	2.5	
	4	56.9	-49.2	24.6	153	54.7	-45.6	18.9	158	-2.2	3.6	-5.6	6.8	7.1	
	5	59.9	-45.4	22.7	153	57.5	-39.9	18.2	156	-2.3	5.5	-4.4	7.1	7.5	
	6	62.8	-41.6	20.8	153	59.5	-35.7	16.2	156	-3.2	5.9	-4.5	7.5	8.2	
	7	65.8	-37.8	18.9	153	61.5	-30.6	16.2	152	-4.2	7.2	-2.6	7.7	8.8	
	8	68.7	-34.0	17.0	153	64.1	-26.2	16.8	147	-4.5	7.8	-0.1	7.8	9.1	
	9	71.7	-30.3	15.2	153	66.9	-22.8	16.3	145	-4.7	7.5	1.1	7.5	9.0	
	10	74.6	-26.5	13.3	153	69.7	-19.9	16.2	141	-4.9	6.6	2.9	7.2	8.7	
	11	77.6	-22.7	11.4	153	72.8	-17.1	17.4	135	-4.7	5.6	6.0	8.2	9.5	
L	12	80.5	-18.9	9.5	153	76.0	-15.2	13.4	139	-4.4	3.7	3.9	5.4	7.0	Laubgrün - Weiß rgb: L - W
	13	83.5	-15.1	7.6	153	80.6	-13.9	11.4	141	-2.8	1.2	3.8	4.0	5.0	
	14	86.5	-11.3	5.7	153	84.1	-10.8	8.5	142	-2.3	0.5	2.8	2.9	3.7	
	15	89.4	-7.5	3.8	153	87.3	-8.0	6.3	142	-2.0	-0.4	2.5	2.6	3.3	
	16	92.4	-3.7	1.9	153	90.0	-4.8	1.8	160	-2.2	-1.0	0.0	1.1	2.6	
W	17	95.3	0.0	0.0	0	95.3	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	Mittlerer CIELAB-Abstand (17 Stufen) ΔH*CIELAB = 4.7 ΔE*CIELAB = 5.5
	18	48.1	-60.6	30.3	153	48.1	-60.6	30.3	153	0.0	0.0	0.0	0.0	0.0	
L	19	59.9	-45.4	22.7	153	57.5	-39.9	18.2	156	-2.3	5.5	-4.4	7.1	7.5	Mittlerer CIELAB-Abstand (5 Stufen) ΔH*CIELAB = 3.7 ΔE*CIELAB = 4.3
	20	71.7	-30.3	15.2	153	66.9	-22.8	16.3	145	-4.7	7.5	1.1	7.5	9.0	
	21	83.5	-15.1	7.6	153	80.6	-13.9	11.4	141	-2.8	1.2	3.8	4.0	5.0	
W	22	95.3	0.0	0.0	0	95.3	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	
Mittlerer Farbwiedergabe-Index: R*ab,m = 76															


YG320-3N, Gerät: XcmyNP_D50_L; Messung: L27G00NP.PDF; Datum: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-ref	ΔH*	ΔE*	Start-Ausgabe S1						
L	1	48.9	-63.5	33.0	153	48.9	-63.5	33.0	153	0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach
	2	51.8	-59.5	30.9	153	51.5	-57.8	30.8	152	-0.2	1.7	0.0	1.7	1.8	ISO/IEC 15775 Anhang G
	3	54.7	-55.6	28.9	153	54.0	-53.6	27.4	153	-0.7	1.9	-1.4	2.4	2.6	und DIN 33866-1 Anhang G
	4	57.6	-51.6	26.8	153	55.4	-47.5	21.0	156	-2.1	4.1	-5.7	7.1	7.4	relative CIELAB Daten für "aus"
	5	60.5	-47.6	24.8	153	58.2	-41.9	20.1	154	-2.3	5.7	-4.5	7.4	7.7	ΔL* = 95.38 - 48.9
	6	63.4	-43.6	22.7	153	60.1	-37.5	17.9	155	-3.2	6.1	-4.7	7.8	8.4	Gleichmäßigkeit
	7	66.3	-39.7	20.6	153	62.0	-32.4	17.6	152	-4.2	7.3	-2.9	7.9	9.0	g* = 62.1
	8	69.2	-35.7	18.6	153	64.5	-28.1	18.0	147	-4.6	7.6	-0.5	7.6	8.9	
	9	72.1	-31.7	16.5	153	67.2	-24.7	17.4	145	-4.8	7.0	0.9	7.1	8.6	Helligkeitsumfang relativ zu Offset
	10	75.0	-27.7	14.4	153	70.0	-21.8	17.1	142	-5.0	5.9	2.7	6.5	8.3	f* = 60.1
	11	78.0	-23.7	12.4	153	73.1	-19.2	18.2	137	-4.8	4.5	5.8	7.4	8.9	
	12	80.9	-19.8	10.3	153	76.3	-16.9	14.1	140	-4.5	2.9	3.8	4.8	6.6	Laubgrün – Weiß
	13	83.8	-15.8	8.3	153	80.8	-15.3	12.0	142	-2.9	0.5	3.8	3.8	4.8	cmy0: L – W
	14	86.7	-11.8	6.2	153	84.3	-11.8	9.0	143	-2.3	0.0	2.8	2.8	3.7	
	15	89.6	-7.9	4.1	153	87.5	-8.7	6.7	143	-2.0	-0.7	2.6	2.7	3.4	Mittlerer CIELAB-Abstand (17 Stufen)
	16	92.5	-3.9	2.1	153	90.2	-5.0	2.0	159	-2.2	-1.0	0.0	1.1	2.6	ΔH* _{CIELAB} = 4.6
	W	17	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0
L	18	48.9	-63.5	33.0	153	48.9	-63.5	33.0	153	0.0	0.0	0.0	0.0	0.0	
	19	60.5	-47.6	24.8	153	58.2	-41.9	20.1	154	-2.3	5.7	-4.5	7.4	7.7	
	20	72.1	-31.7	16.5	153	67.2	-24.7	17.4	145	-4.8	7.0	0.9	7.1	8.6	Mittlerer CIELAB-Abstand (5 Stufen)
	21	83.8	-15.8	8.3	153	80.8	-15.3	12.0	142	-2.9	0.5	3.8	3.8	4.8	ΔH* _{CIELAB} = 3.6
W	22	95.4	0.0	0.0	0	95.4	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0	ΔE* _{CIELAB} = 4.2
Mittlerer Farbwiedergabe-Index:										R* _{ab,m} = 76					

YG321-3N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202

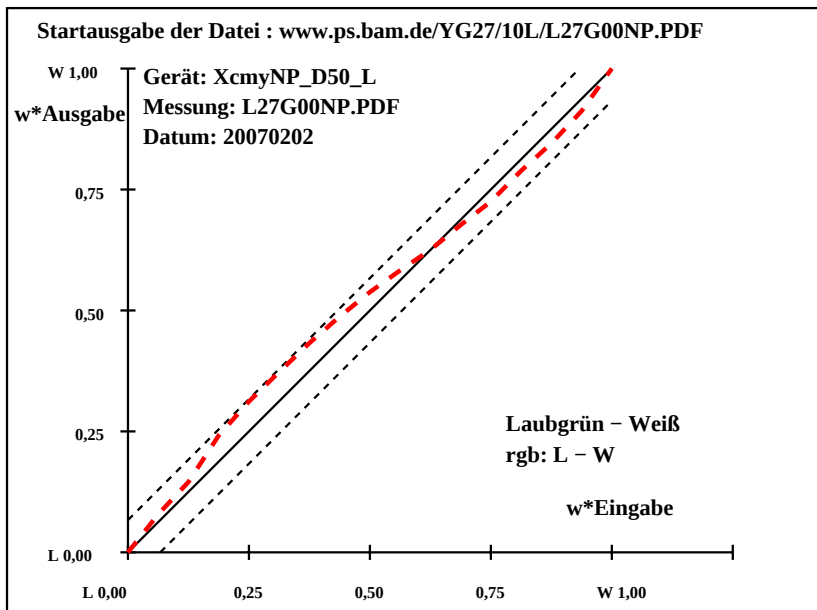

YG320-7N, Gerät: XcmyNP_D50_L; Messung: L27G00NP.PDF; Datum: 20070202

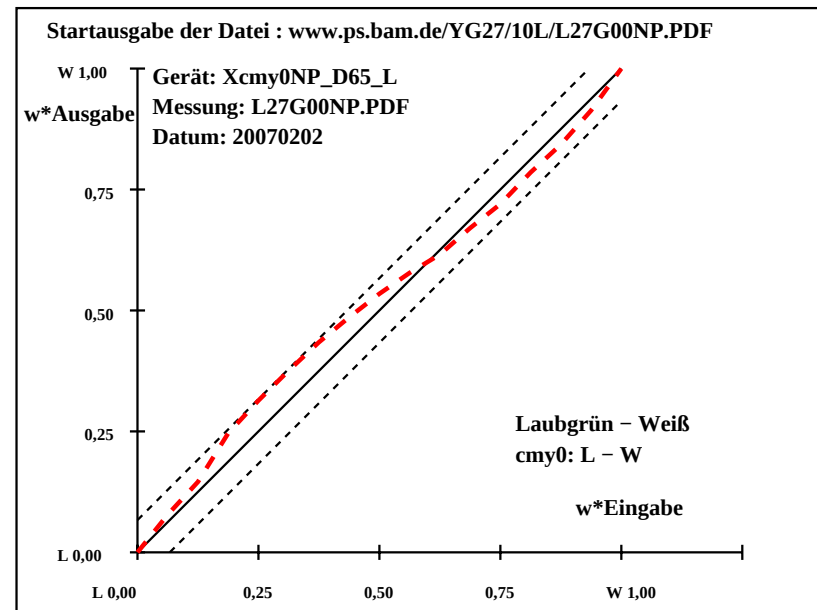

YG321-7N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202