


T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start-Ausgabe S1
N	1	27.9	2.3	1.0	23	27.9	2.3	Kennzeichnung nach
	2	29.2	6.1	4.0	33	28.9	5.8	ISO/IEC 15775 Anhang G
	3	30.5	10.0	7.1	35	30.2	12.1	und DIN 33866-1 Anhang G
	4	31.8	13.8	10.1	36	31.6	16.0	relative CIELAB Daten für "aus"
	5	33.1	17.7	13.1	37	32.7	21.1	$\Delta L^* = 48.58 - 27.92$
	6	34.4	21.5	16.2	37	33.4	25.2	Gleichmäßigkeit
	7	35.7	25.3	19.2	37	34.7	30.1	$g^* = 62.2$
	8	37.0	29.2	22.2	37	35.9	33.3	
	9	38.3	33.0	25.3	37	37.4	36.9	Helligkeitsumfang relativ zu Offset
	10	39.5	36.8	28.3	38	38.5	40.7	$f^* = 26.7$
	11	40.8	40.7	31.3	38	39.5	44.1	
	12	42.1	44.5	34.3	38	40.2	46.8	Schwarz – Orangerot
	13	43.4	48.4	37.4	38	41.7	50.5	rgb: N – O
	14	44.7	52.2	40.4	38	43.7	54.9	
	15	46.0	56.0	43.4	38	45.1	58.0	Mittlerer CIELAB-Abstand (17 Stufen)
	16	47.3	59.9	46.5	38	46.2	60.5	$\Delta H^*_{CIELAB} = 2.7$
	17	48.6	63.7	49.5	38	48.6	63.7	$\Delta E^*_{CIELAB} = 2.9$
O	18	27.9	2.3	1.0	23	27.9	2.3	
	19	33.1	17.7	13.1	37	32.7	21.1	
	20	38.3	33.0	25.3	37	37.4	36.9	Mittlerer CIELAB-Abstand (5 Stufen)
	21	43.4	48.4	37.4	38	41.7	50.5	$\Delta H^*_{CIELAB} = 2.1$
	22	48.6	63.7	49.5	38	48.6	63.7	$\Delta E^*_{CIELAB} = 2.2$
Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 87$								


YG320–3N, Gerät: XcmyNP_D50_L; Messung: L27G00NP.PDF; Datum: 20070202

T	i	LAB*a,ref	hab,ref	LAB*a,out	hab,out	LAB*a,out/c-refΔH*	ΔE*	Start-Ausgabe S1
N	1	28.0	2.1	0.8	21	28.0	2.1	Kennzeichnung nach
	2	29.2	5.7	3.6	32	28.9	5.1	ISO/IEC 15775 Anhang G
	3	30.3	9.3	6.5	35	30.0	11.0	und DIN 33866-1 Anhang G
	4	31.5	12.9	9.3	36	31.3	14.6	relative CIELAB Daten für "aus"
	5	32.7	16.5	12.1	36	32.2	19.3	$\Delta L^* = 46.67 - 27.99$
	6	33.8	20.1	15.0	37	32.8	23.1	Gleichmäßigkeit
	7	35.0	23.7	17.8	37	33.9	27.8	$g^* = 59.4$
	8	36.2	27.3	20.6	37	35.0	30.8	
	9	37.3	31.0	23.4	37	36.4	34.3	Helligkeitsumfang relativ zu Offset
	10	38.5	34.6	26.3	37	37.3	37.8	$f^* = 24.1$
	11	39.7	38.2	29.1	37	38.3	41.1	
	12	40.8	41.8	31.9	37	38.8	43.7	Schwarz – Orangerot
	13	42.0	45.4	34.8	37	40.2	47.2	cmy0: N – O
	14	43.2	49.0	37.6	38	42.1	51.4	
	15	44.3	52.6	40.4	38	43.4	54.5	Mittlerer CIELAB-Abstand (17 Stufen)
	16	45.5	56.2	43.3	38	44.4	56.9	$\Delta H^*_{CIELAB} = 2.4$
	17	46.7	59.8	46.1	38	46.7	59.8	$\Delta E^*_{CIELAB} = 2.6$
O	18	28.0	2.1	0.8	21	28.0	2.1	
	19	32.7	16.5	12.1	36	32.2	19.3	
	20	37.3	31.0	23.4	37	36.4	34.3	Mittlerer CIELAB-Abstand (5 Stufen)
	21	42.0	45.4	34.8	37	40.2	47.2	$\Delta H^*_{CIELAB} = 1.8$
	22	46.7	59.8	46.1	38	46.7	59.8	$\Delta E^*_{CIELAB} = 2.0$
Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 89$								

YG321–3N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202

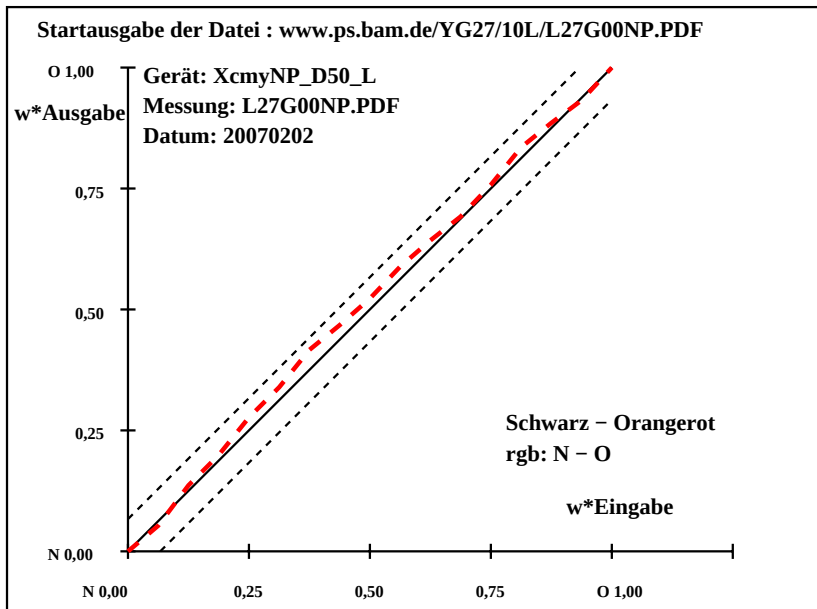

YG320–7N, Gerät: XcmyNP_D50_L; Messung: L27G00NP.PDF; Datum: 20070202

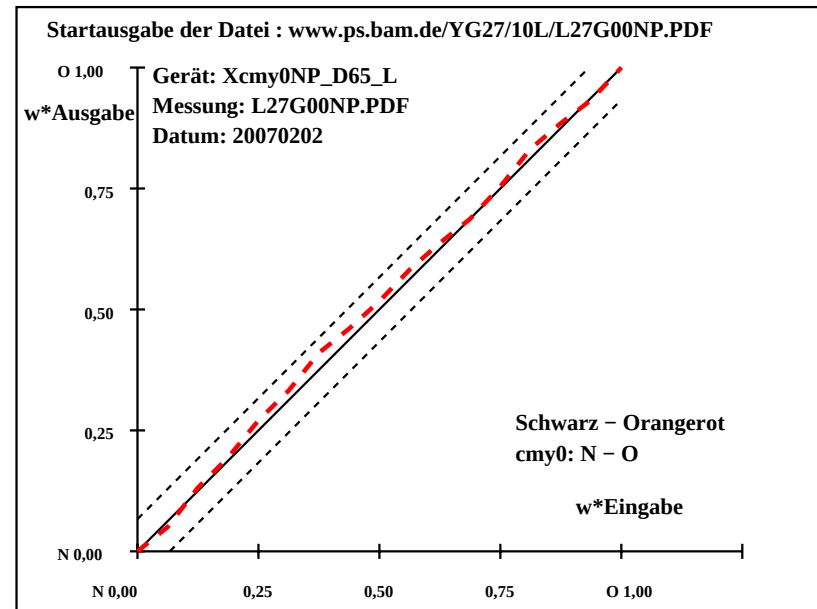

YG321–7N, Gerät: Xcmy0NP_D65_L; Messung: L27G00NP.PDF; Datum: 20070202