

see similar files: <http://farbe.li.tu-berlin.de/AE46/AE46F0PX.PDF> / .PS; 3D-linearization, page 18/24
technical information: <http://farbe.li.tu-berlin.de/> or <http://farbe.li.tu-berlin.de/AE46F0PX.PDF> in file (F)

i	LAB* _{ref}	L* _{out}	LAB* _{out}	LAB* _{out-ref}	ΔE*
1	37,98 0,00 0,00	0,00	37,98 0,00 0,00	0,00 0,00 0,00	0,01
2	41,81 0,00 0,00	0,24	51,79 0,00 0,00	9,97 0,00 0,00	9,97
3	45,64 0,00 0,00	0,34	57,87 0,00 0,00	12,22 0,00 0,00	12,22
4	49,47 0,00 0,00	0,42	62,60 0,00 0,00	13,13 0,00 0,00	13,13
5	53,29 0,00 0,00	0,49	66,62 0,00 0,00	13,32 0,00 0,00	13,32
6	57,12 0,00 0,00	0,56	70,19 0,00 0,00	13,06 0,00 0,00	13,06
7	60,95 0,00 0,00	0,61	73,43 0,00 0,00	12,48 0,00 0,00	12,48
8	64,78 0,00 0,00	0,66	76,43 0,00 0,00	11,65 0,00 0,00	11,65
9	68,61 0,00 0,00	0,71	79,23 0,00 0,00	10,62 0,00 0,00	10,62
10	72,44 0,00 0,00	0,76	81,87 0,00 0,00	9,43 0,00 0,00	9,43
11	76,26 0,00 0,00	0,80	84,37 0,00 0,00	8,10 0,00 0,00	8,10
12	80,09 0,00 0,00	0,84	86,76 0,00 0,00	6,66 0,00 0,00	6,66
13	83,92 0,00 0,00	0,88	89,04 0,00 0,00	5,12 0,00 0,00	5,12
14	87,75 0,00 0,00	0,92	91,24 0,00 0,00	3,49 0,00 0,00	3,49
15	91,58 0,00 0,00	0,96	93,36 0,00 0,00	1,78 0,00 0,00	1,78
16	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01
17	37,98 0,00 0,00	0,00	37,98 0,00 0,00	0,00 0,00 0,00	0,01
18	52,34 0,00 0,00	0,48	65,66 0,00 0,00	13,32 0,00 0,00	13,32
19	66,69 0,00 0,00	0,69	77,85 0,00 0,00	11,15 0,00 0,00	11,15
20	81,05 0,00 0,00	0,85	87,34 0,00 0,00	6,28 0,00 0,00	6,28
21	95,41 0,00 0,00	1,00	95,41 0,00 0,00	0,00 0,00 0,00	0,01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G


Mean lightness difference (16 steps)
 $\Delta E^*_{\text{CIELAB}} = 8,1$

Mean lightness difference (5 steps)
 $\Delta L^*_{\text{CIELAB}} = 6,1$

Mean colour reproduction index: $R^*_{\text{ab,m}} = 64,5$

part 1,

AE460-3de: 11052

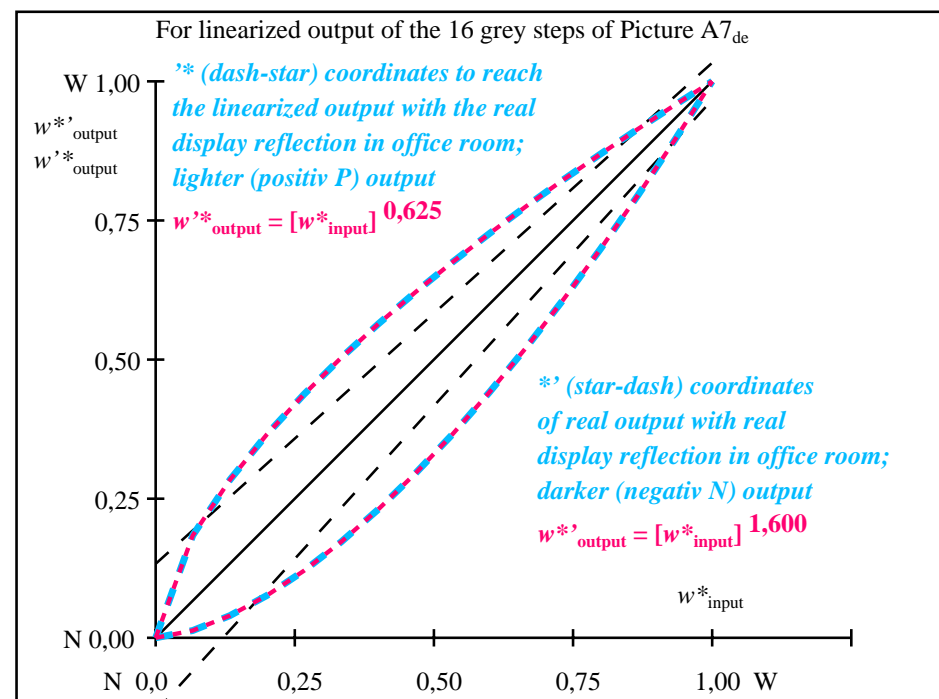

part 2,

AE461-3de: 11052

L^*/Y_{intended} (absolute)	37,9/10,0	41,8/12,3	45,6/15,0	49,4/17,9	53,2/21,3	57,1/25,0	60,9/29,1	64,7/33,7	68,6/38,8	72,4/44,3	76,2/50,3	80,0/56,8	83,9/63,9	87,7/71,5	91,5/79,7	95,4/88,5
0 0 0 n* setcmyk gp=0,625 No. and Hex code	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8	08;7	09;6	10;5	11;4	12;3	13;2	14;1	15;0
$w^* = l^*_{\text{CIELAB}, r}$ (relative)	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000
w^*_{intended} w^*_{output}	0,000 0,000	0,067 0,184	0,133 0,283	0,200 0,365	0,267 0,438	0,333 0,502	0,400 0,564	0,467 0,621	0,533 0,674	0,600 0,726	0,667 0,776	0,733 0,823	0,800 0,869	0,867 0,914	0,933 0,957	1,000 1,000

part 3, picture A7_{de}: 16 visual equidistant L^* -grey steps; PS operator: 0 0 0 n* setcmykcolor

AE460-7de: 11052

In-out: Test chart AE46 similar to test chart 1 of DIN 33872-6
Viewing Y contrast $Y_W:Y_N=88,9:10$; Y_N -range 7,5 to <15

input: $rgb/cmy0/000n/w$ set...
output: $\rightarrow rgb_{\text{de}}$ setrgbcolor

TUB Registration: 20190301-AE46/AE46L0FA.TXT /.PS
application for measurement or viewing of display and print output
TUB material: code=th4ta