


T	LAB*a _{ref}	lab _{ref}	LAB*a _{out}	lab _{out}	LAB*a _{out} /c-ref/ΔE*	ΔE*	Start-Ausgabe S1
R _d	1 35.9 60.7 44.5 36	35.9 60.7 44.5 36	0.0 0.0 0.0 0.0	0.0	0.0 0.0 0.0 0.0	0.0	Kennzeichnung nach
	2 39.5 56.9 41.7 36	40.2 58.0 36.9 32	0.7 1.1 -4.7 4.9 5.0	1.1	-4.7 4.9 5.0	0.0	ISO/IEC 15775:1999 Anhang G
	3 43.0 53.1 39.0 36	45.1 53.5 29.9 29	2.1 0.4 -9.0 9.1 9.3	2.1	0.4 -9.0 9.1 9.3	0.0	& DIN 33866-1:2000 Anhang G
	4 46.6 49.3 36.2 36	49.9 48.2 26.2 29	3.3 -1.0 -9.9 10.0 10.6	3.3	-1.0 -9.9 10.0 10.6	0.0	relative CIELAB Daten für "aus"
	5 50.1 45.5 33.4 36	54.4 43.2 21.4 26	4.3 -2.2 -11.9 12.2 12.9	4.3	-2.2 -11.9 12.2 12.9	0.0	ΔE* = 92.71 - 35.94
	6 53.7 41.7 30.6 36	58.0 38.5 20.0 27	4.3 -3.1 -10.5 11.1 11.9	4.3	-3.1 -10.5 11.1 11.9	0.0	Gleichmäßigkeit
	7 57.2 37.9 27.9 36	61.6 34.7 16.8 26	4.3 -3.1 -10.9 11.5 12.3	4.3	-3.1 -10.9 11.5 12.3	0.0	g* = 41.7
	8 60.8 34.1 25.1 36	65.9 29.7 14.8 26	5.1 -4.3 -10.2 11.2 12.3	5.1	-4.3 -10.2 11.2 12.3	0.0	
Z _d	9 64.3 30.3 22.3 36	69.8 25.4 12.6 26	5.4 -4.8 -9.6 10.9 12.2	5.4	-4.8 -9.6 10.9 12.2	0.0	Helligkeitsumfang relativ zu Offset
	10 67.9 26.5 19.5 36	73.7 21.2 10.2 26	5.8 -5.2 -9.2 10.7 12.2	5.8	-5.2 -9.2 10.7 12.2	0.0	f* = 73.3
	11 71.4 22.7 16.8 36	77.6 17.1 7.5 24	6.2 -5.5 -9.2 10.8 12.4	6.2	-5.5 -9.2 10.8 12.4	0.0	
	12 75.0 18.9 14.0 36	81.3 13.1 5.2 22	6.4 -5.7 -9.5 10.5 12.3	6.4	-5.7 -9.5 10.5 12.3	0.0	Rot - Weiß
	13 78.5 15.1 11.2 37	85.0 8.9 3.2 20	6.5 -6.1 -7.9 10.1 12.0	6.5	-6.1 -7.9 10.1 12.0	0.0	rgb: (R - W) _d
	14 82.1 11.3 8.4 37	88.7 4.5 2.1 25	6.7 -6.7 -6.2 9.3 11.4	6.7	-6.7 -6.2 9.3 11.4	0.0	
	15 85.6 7.5 5.6 37	92.1 0.0 1.5 90	6.5 -7.4 -4.0 8.6 10.7	6.5	-7.4 -4.0 8.6 10.7	0.0	Mittlerer CIELAB-Abstand (17 Stufen)
	16 89.2 3.7 2.9 38	92.6 0.0 0.1 90	3.4 -3.6 -2.7 4.6 5.8	3.4	-3.6 -2.7 4.6 5.8	0.0	ΔE* _{CIELAB} = 8.6
W _d	17 92.7 0.0 0.1 135	92.7 0.0 0.1 135	0.0 0.0 0.0 0.0	0.0	0.0 0.0 0.0 0.0	0.0	ΔE* _{CIELAB} = 9.6
R _d	18 35.9 60.7 44.5 36	35.9 60.7 44.5 36	0.0 0.0 0.0 0.0	0.0	0.0 0.0 0.0 0.0	0.0	
	19 50.1 45.5 33.4 36	54.4 43.2 21.4 26	4.3 -2.2 -11.9 12.2 12.9	4.3	-2.2 -11.9 12.2 12.9	0.0	
	20 64.3 30.3 22.3 36	69.8 25.4 12.6 26	5.4 -4.8 -9.6 10.9 12.2	5.4	-4.8 -9.6 10.9 12.2	0.0	Mittlerer CIELAB-Abstand (5 Stufen)
	21 78.5 15.1 11.2 37	85.0 8.9 3.2 20	6.5 -6.1 -7.9 10.1 12.0	6.5	-6.1 -7.9 10.1 12.0	0.0	ΔE* _{CIELAB} = 6.6
	22 92.7 0.0 0.1 135	92.7 0.0 0.1 135	0.0 0.0 0.0 0.0	0.0	0.0 0.0 0.0 0.0	0.0	ΔE* _{CIELAB} = 7.4
							R* _{ab,m} = 58


AG82-3N, Gerät: FrghNP_D65_L; Messung: L11g00NA.PDF; Datum: 2007/02/29

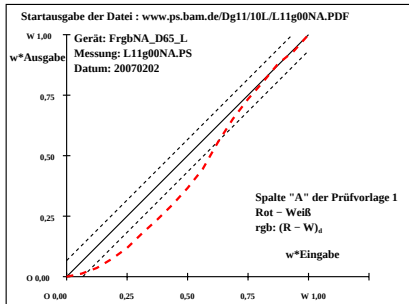

AG82-7N, Gerät: FrghNP_D65_L; Messung: L11g00NA.PS; Datum: 2007/02/02

T	LAB*a _{ref}	lab _{ref}	LAB*a _{out}	lab _{out}	LAB*a _{out} /c-ref/ΔE*	ΔE*	Start-Ausgabe S1	
R _d	1 46.3 60.0 40.4 34	46.3 60.0 40.4 34	0.0 0.0 0.0 0.0	0.0	0.0	0.0	0.0	Kennzeichnung nach ISO/IEC 15775:1999 Anhang G & DIN 33866-1:2000 Anhang G
	2 49.4 56.3 37.9 34	46.3 60.2 39.3 33	-3.0 4.0 1.4 4.2 5.2	3.0	4.0	1.4	4.2	relative CIELAB Daten für "aus"
	3 52.4 52.5 35.4 34	46.2 60.6 37.3 32	-6.2 8.1 1.9 8.3 10.4	6.2	8.1	1.9	8.3	ΔE* = 95.41 - 46.31
	4 55.5 48.8 32.8 34	47.1 60.0 34.0 30	-8.3 11.3 1.2 11.3 14.1	8.3	11.3	1.2	11.3	Gleichmäßigkeit
	5 58.6 45.0 30.3 34	48.6 58.4 30.4 27	-9.9 13.4 0.1 13.4 16.7	9.9	13.4	0.1	13.4	g* = 11.8
	6 61.7 41.3 27.8 34	50.7 55.6 26.0 25	-10.8 14.3 -1.7 14.5 18.1	10.8	14.3	-1.7	14.5	
	7 64.7 37.5 25.3 34	53.3 51.8 22.8 24	-11.3 14.3 -2.4 14.5 18.5	11.3	14.3	-2.4	14.5	
	8 67.8 33.8 22.7 34	56.9 46.7 20.7 24	-10.8 13.0 -1.9 13.1 17.1	10.8	13.0	-1.9	13.1	
Z _d	9 70.9 30.0 20.2 34	60.7 41.1 18.9 25	-10.1 11.1 -1.2 11.2 15.1	10.1	11.1	-1.2	11.2	Helligkeitsumfang relativ zu Offset
	10 73.9 26.3 17.7 34	64.9 34.8 17.4 27	-8.9 8.5 -0.2 8.6 12.4	8.9	8.5	-0.2	8.6	f* = 63.4
	11 77.0 22.5 15.2 34	70.6 27.0 14.4 28	-6.3 4.5 -0.7 4.6 7.9	6.3	4.5	-0.7	4.6	
	12 80.1 18.8 12.6 34	75.6 21.2 10.6 27	-4.4 2.5 -1.9 3.2 5.5	4.4	2.5	-1.9	3.2	Rot - Weiß
	13 83.1 15.0 10.1 34	80.1 15.9 8.3 28	-2.9 0.9 -1.7 2.0 3.6	2.9	0.9	-1.7	2.0	rgb: (R - W) _d
	14 86.2 11.3 7.6 34	84.1 11.4 6.3 29	-2.0 0.1 -1.2 1.3 2.4	2.0	0.1	-1.2	1.3	
	15 89.3 7.5 5.0 34	88.4 6.7 4.0 31	-0.8 -0.7 -0.9 1.3 1.6	0.8	-0.7	-0.9	1.3	Mittlerer CIELAB-Abstand (17 Stufen)
	16 92.3 3.8 2.5 34	90.0 3.2 1.9 31	-2.3 -0.4 -0.5 0.8 2.5	ΔE* _{CIELAB} = 6.6				
W _d	17 95.4 0.0 0.0 1	95.4 0.0 0.0 0	0.0 0.0 0.0 0.0	0.0	0.0	0.0	0.0	ΔE* _{CIELAB} = 8.9
R _d	18 46.3 60.0 40.4 34	46.3 60.0 40.4 34	0.0 0.0 0.0 0.0	0.0	0.0	0.0	0.0	
	19 58.6 45.0 30.3 34	48.6 58.4 30.4 27	-9.9 13.4 0.1 13.4 16.7	9.9	13.4	0.1	13.4	
Z _d	20 70.9 30.0 20.2 34	60.7 41.1 18.9 25	-10.1 11.1 -1.2 11.2 15.1	10.1	11.1	-1.2	11.2	Mittlerer CIELAB-Abstand (5 Stufen)
	21 83.1 15.0 10.1 34	80.1 15.9 8.3 28	-2.9 0.9 -1.7 2.0 3.6	ΔE* _{CIELAB} = 5.3				
	22 95.4 0.0 0.0 1	95.4 0.0 0.0 0	0.0 0.0 0.0 0.0	ΔE* _{CIELAB} = 7.1				
				R* _{ab,m} = 61				

AG82-3N, Gerät: XrgbNP_D65_L; Messung: L11g00NP.PDF; Datum: 2007/02/02

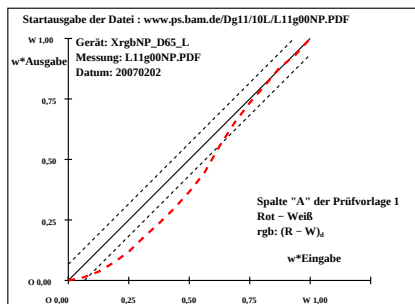

AG82-7N, Gerät: XrgbNP_D65_L; Messung: L11g00NP.PDF; Datum: 2007/02/02