




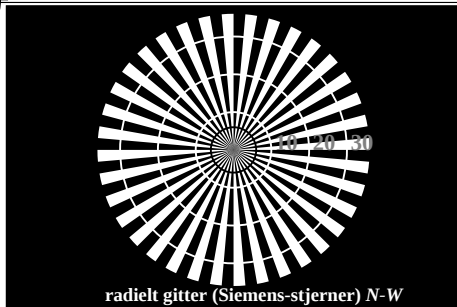


radiell gitter (Siemens-stjerner) N-W



radiell gitter (Siemens-stjerner) W-N

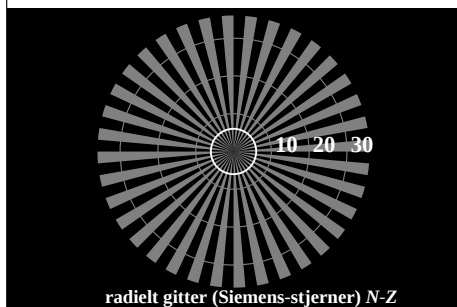


radiell gitter (Siemens-stjerner) N-Z




radiell gitter (Siemens-stjerner) W-Z

AN060-3, Figur A1Wæ: Element A: Radiell gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0/w/000n*

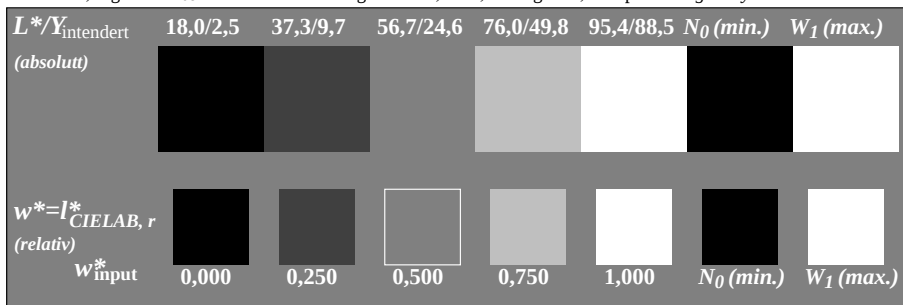


AN060-5, Figur A2Wæ: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

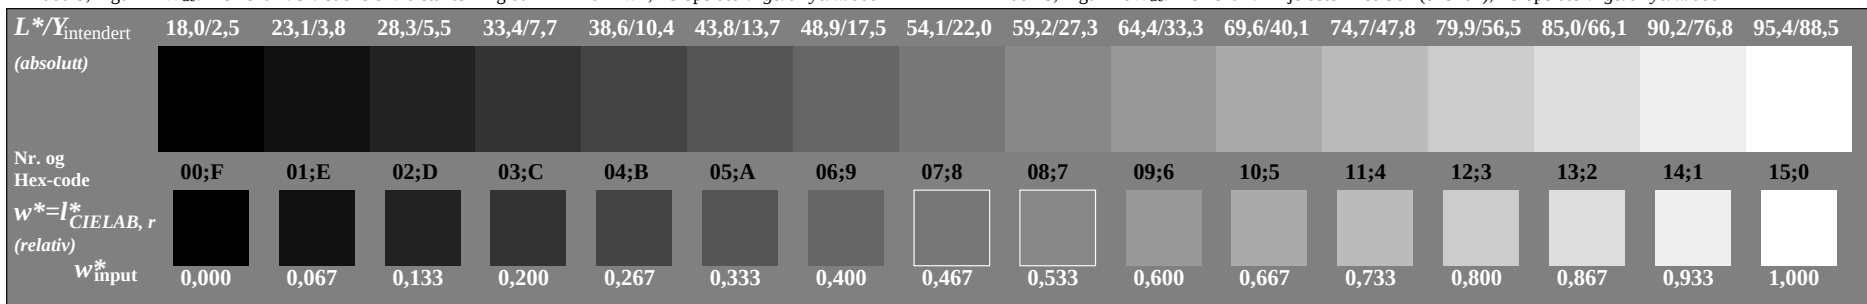


AN060-7, Figur A3Wæ: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0/w/000n*



Prøveplansje AN06 ifølge ISO 9241-306
akromatisk prøveplansje N

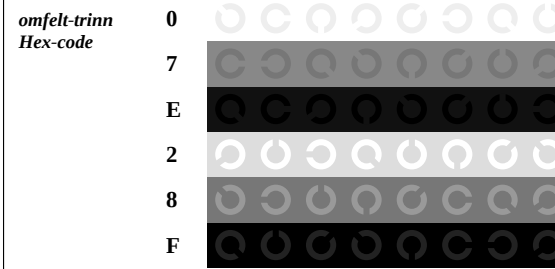


Landoltringer W-N




kode: omfelt - ring

AN061-1, Figur A4Wæ: Element D: Landoltringer W-N; PS operator: *rgb/cmy0/w/000n*

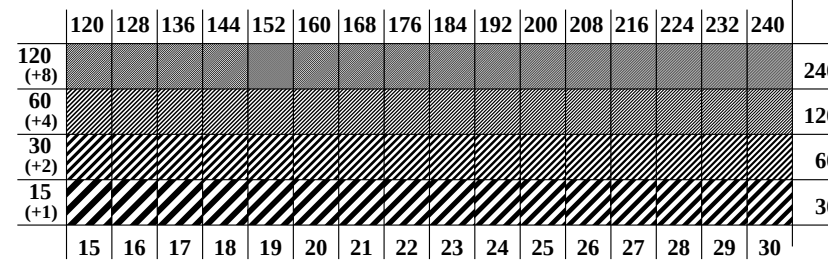

rasterbredde i lpi

AN061-3, Figur A5Wæ: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0/w/000n*

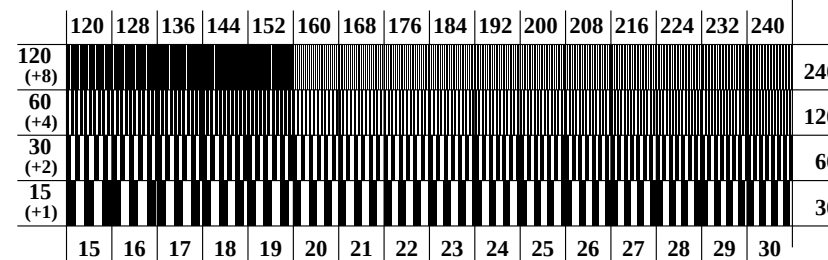


rasterbredde i lpi


AN061-5, Figur A6Wæ: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0/w/000n*

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*




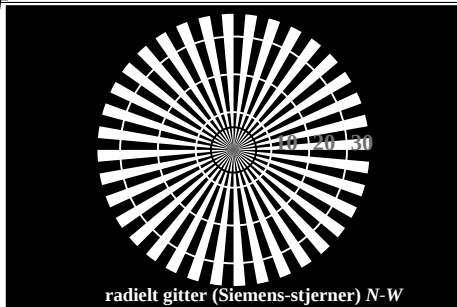


radiell gitter (Siemens-stjerner) N-W



radiell gitter (Siemens-stjerner) W-N

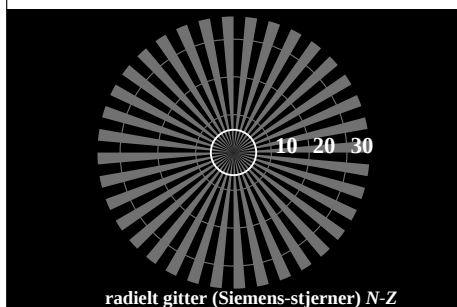

radiell gitter (Siemens-stjerner) N-Z



radiell gitter (Siemens-stjerner) W-Z

AN060-3, Figur A1Wæ: Element A: Radiell gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0/w/000n*

$L^*/Y_{\text{intendert}}$ (absolutt)	18,0/2,5	37,3/9,7	56,7/24,6	76,0/49,8	95,4/88,5	N_0 (min.)	W_1 (max.)
$w^* = I^*_{\text{CIELAB}, r}$ (relativ)							
w^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

AN060-5, Figur A2Wæ: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

$L^*/Y_{\text{intendert}}$ (absolutt)	18,0/2,5	23,1/3,8	28,3/5,5	33,4/7,7	38,6/10,4	43,8/13,7	48,9/17,5	54,1/22,0	59,2/27,3	64,4/33,3	69,6/40,1	74,7/47,8	79,9/56,5	85,0/66,1	90,2/76,8	95,4/88,5
Nr. og Hex-code	00:F	01:E	02:D	03:C	04:B	05:A	06:9	07:8	08:7	09:6	10:5	11:4	12:3	13:2	14:1	15:0
$w^* = I^*_{\text{CIELAB}, r}$ (relativ)																
w^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

AN060-7, Figur A3Wæ: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0/w/000n*



Prøveplansje AN06 ifølge ISO 9241-306
akromatisk prøveplansje N

omfelt-trinn Hex-code	0	7	E	2	8	F
ring-trinn Hex-code	0-1	7-8	E-F	2-0	8-6	F-D

Landoltringer W-N

kode: omfelt - ring

AN061-1, Figur A4Wæ: Element D: Landoltringer W-N; PS operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

rasterbredde i lpi

AN061-3, Figur A5Wæ: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0/w/000n*


	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

rasterbredde i lpi


AN061-5, Figur A6Wæ: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0/w/000n*

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*




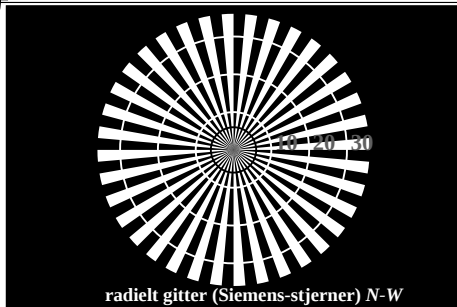


radiell gitter (Siemens-stjerner) N-W



radiell gitter (Siemens-stjerner) W-N

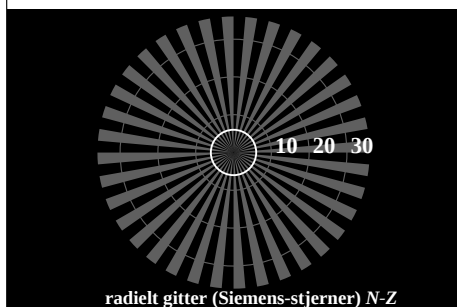

radiell gitter (Siemens-stjerner) N-Z



radiell gitter (Siemens-stjerner) W-Z

AN060-3, Figur A1Wde: Element A: Radiell gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0/w/000n*

$L^*/Y_{\text{intendert}}$ (absolutt)	18,0/2,5	37,3/9,7	56,7/24,6	76,0/49,8	95,4/88,5	N_0 (min.)	W_1 (max.)
$w^* = I^*_{\text{CIELAB}, r}$ (relativ)							
w^*_{input}	0,000	0,250	0,500	0,750	1,000	N_0 (min.)	W_1 (max.)

AN060-5, Figur A2Wde: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_0 + W_1 ; PS operator: *rgb/cmy0/w/000n*

$L^*/Y_{\text{intendert}}$ (absolutt)	18,0/2,5	23,1/3,8	28,3/5,5	33,4/7,7	38,6/10,4	43,8/13,7	48,9/17,5	54,1/22,0	59,2/27,3	64,4/33,3	69,6/40,1	74,7/47,8	79,9/56,5	85,0/66,1	90,2/76,8	95,4/88,5
Nr. og Hex-code	00:F	01:E	02:D	03:C	04:B	05:A	06:9	07:8	08:7	09:6	10:5	11:4	12:3	13:2	14:1	15:0
$w^* = I^*_{\text{CIELAB}, r}$ (relativ)																
w^*_{input}	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

AN060-7, Figur A3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0/w/000n*



Prøveplansje AN06 ifølge ISO 9241-306
akromatisk prøveplansje N

omfelt-trinn Hex-code	0	7	E	2	8	F
ring-trinn Hex-code	0-1	7-8	E-F	2-0	8-6	F-D

Landoltringer W-N

kode: omfelt - ring

AN061-1, Figur A4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

rasterbredde i lpi

AN061-3, Figur A5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0/w/000n*

	120	128	136	144	152	160	168	176	184	192	200	208	216	224	232	240	
120 (+8)																	240
60 (+4)																	120
30 (+2)																	60
15 (+1)																	30
	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	

rasterbredde i lpi

AN061-5, Figur A6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0/w/000n*

input: *rgb/cmy0/000n/w set...*
output: *->rgb_{de} setrgbcolor*



