

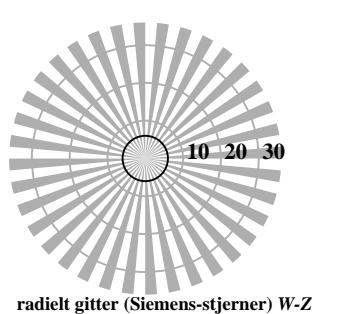
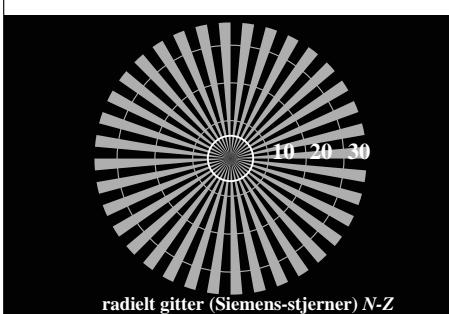



se lignende filer: <http://farbe.li.tu-berlin.de/AN06/AN06HTM>
teknisk informasjon: <http://farbe.li.tu-berlin.de/AN06L0NA.PDF>

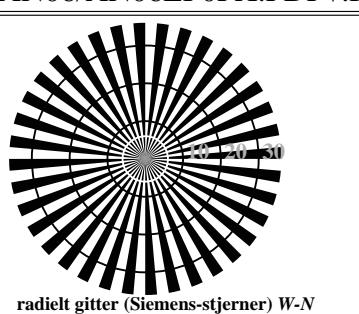



AN060-3, Figur A1Wde: Element A: Radiet gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0/w/000n*

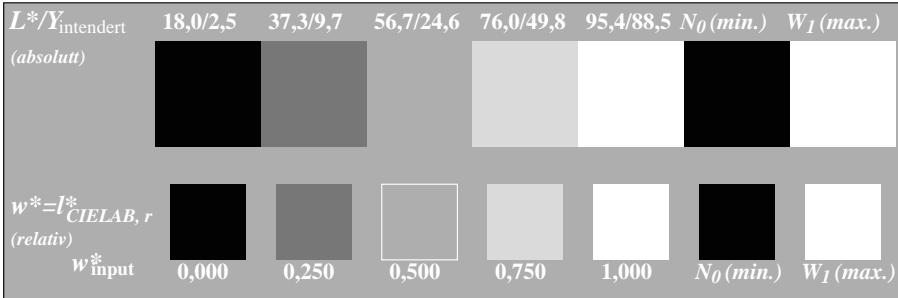

AN060-5, Figur A2Wde: Element B: 5 visuelle ekvidistante L^* -gråtrinn + N_g + W_I ; PS operator: *rgb/cmy0/w/000n*

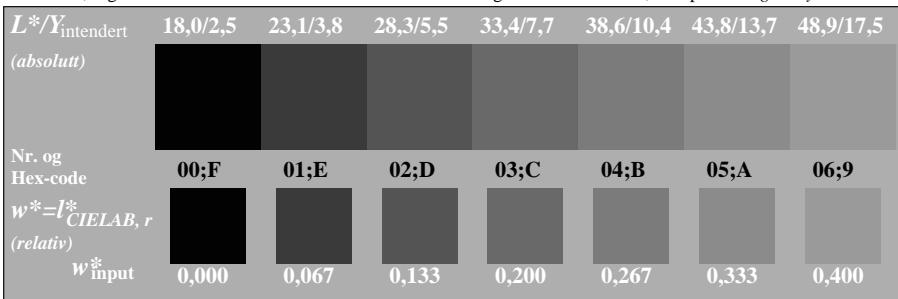

AN060-7, Figur A3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0/w/000n*

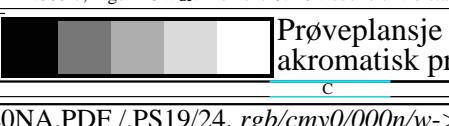


omfelt-trinn Hex-code	0	ring-trinn Hex-code	0-1
	7		7-8
	E		E-F
	2		2-0
	8		8-6
	F		F-D


Landoltringer W-N

kode: omfelt - ring



AN061-1, Figur A4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0/w/000n*

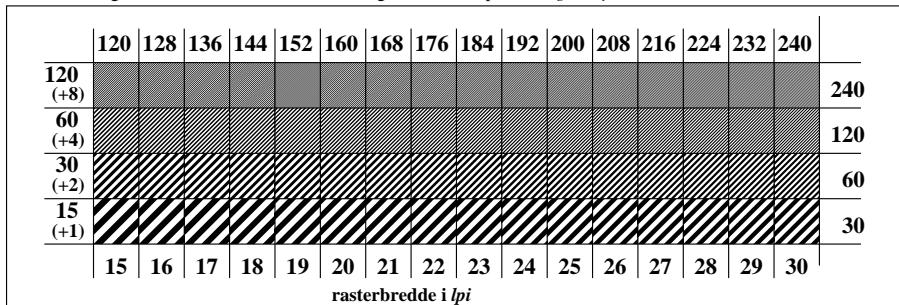

AN061-3, Figur A5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0/w/000n*

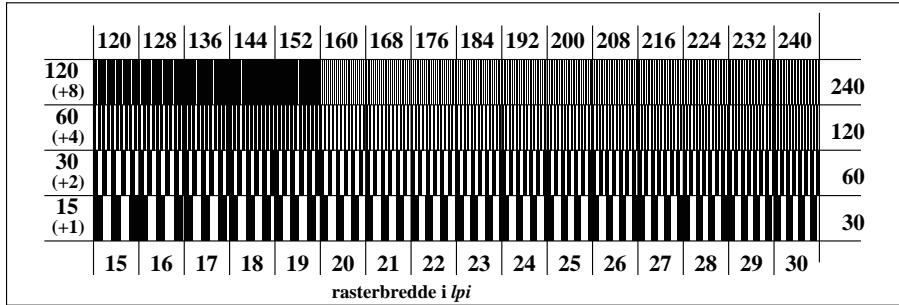

AN061-5, Figur A6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0/w/000n*

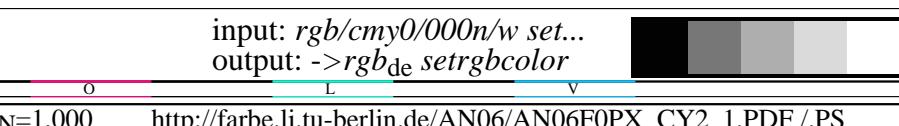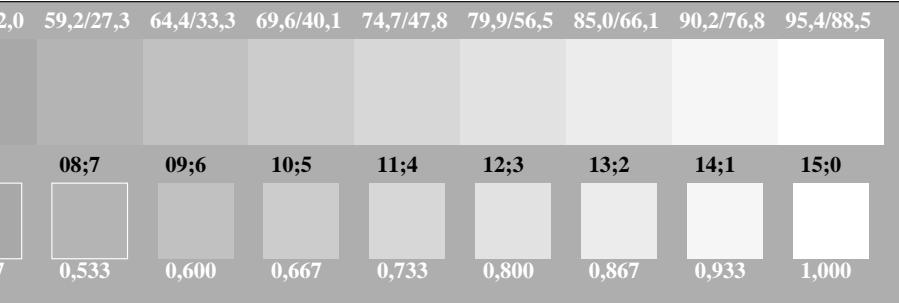

TUB Registrering: 20190301-AN06/AN06LOFA.TXT /PS
anvendelse for måling av display og utskriftsutgang

TUB materiell: code=rha4ta