

C

M

Y

O

L

V


-6

-8




TUB Registrering: 20190301-AN06/AN06LOFA.TXT /PS
anvendelse for måling av display og utskriftsutgang


TUB materiell: code=rha4ta

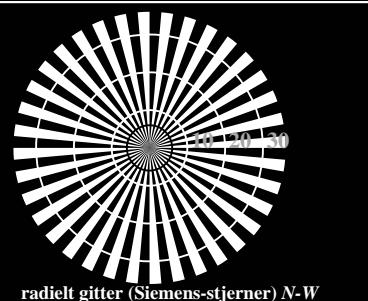


radielt gitter (Siemens-stjerner) N-W

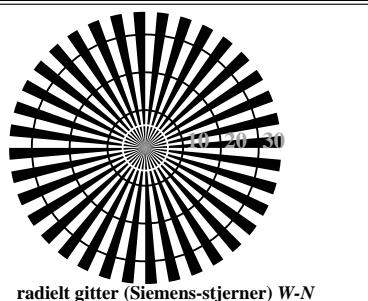



radiet gitter (Siemens-stjerner) W-N

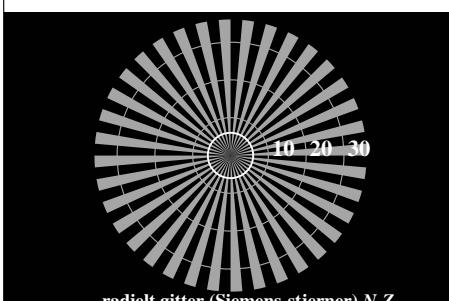



radiet gitter (Siemens-stjerner) N-Z

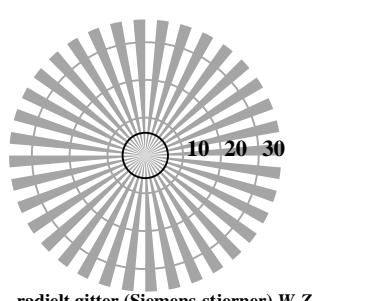

radiet gitter (Siemens-stjerner) W-Z

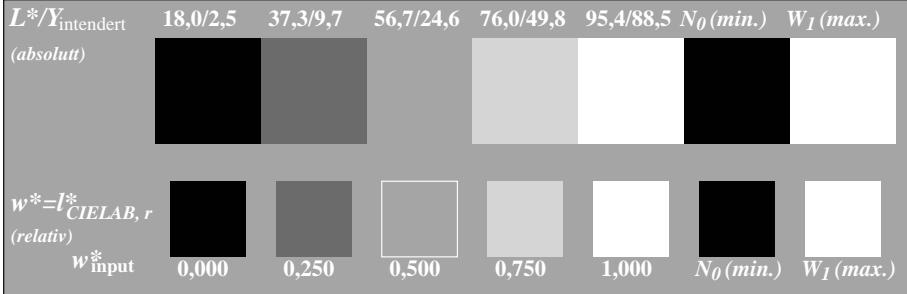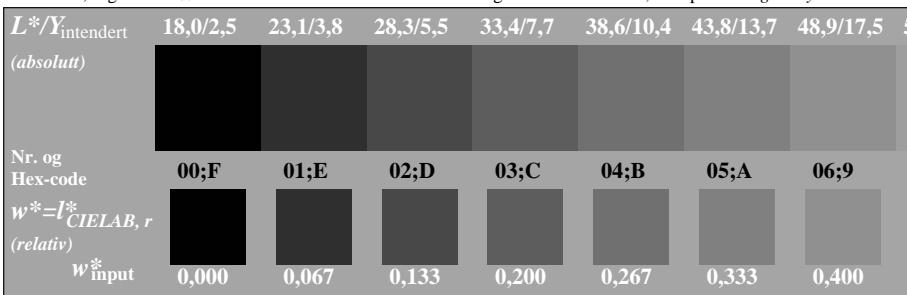AN060-3, Figur A1Wde: Element A: Radiet gitter N-W, W-N, N-Z og W-Z; PS operator: *rgb/cmy0/w/000n*AN060-5, Figur A2Wde: Element B: 5 visuelle ekvidistante L^* -gråtrinn + $N_0 + W_I$; PS operator: *rgb/cmy0/w/000n*AN060-7, Figur A3Wde: Element C: 16 visuelle ekvidistante L^* -gråtrinn; PS operator: *rgb/cmy0/w/000n*

omfelt-trinn Hex-code	0	ring-trinn Hex-code	0-1
	7		7-8
	E		E-F
	2		2-0
	8		8-6
	F		F-D

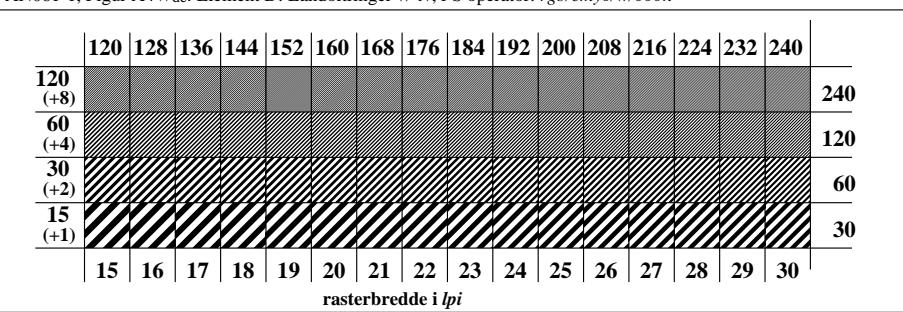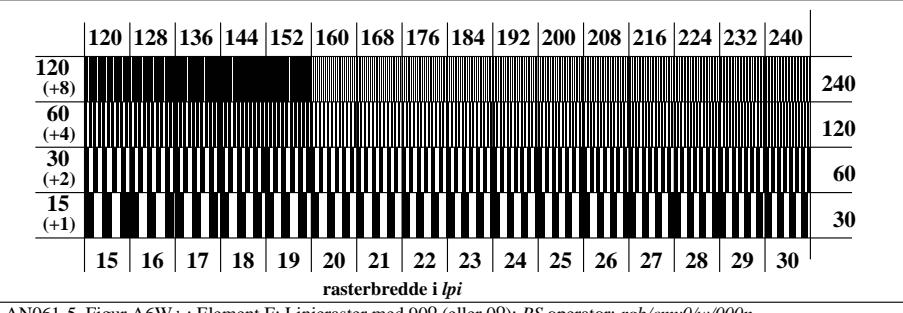AN061-1, Figur A4Wde: Element D: Landoltringer W-N; PS operator: *rgb/cmy0/w/000n*AN061-3, Figur A5Wde: Element E: Linjeraster med 45° (eller 135°); PS operator: *rgb/cmy0/w/000n*AN061-5, Figur A6Wde: Element F: Linjeraster med 90° (eller 0°); PS operator: *rgb/cmy0/w/000n*

Prøveplansje AN06 infølge ISO 9241-306
akromatisk prøveplansje \bar{N}

input: *rgb/cmy0/000n/w set...*
output: *->rgb_de setrgbcolor*